WIRING		
MALE		MALE
PIN #		PIN #
1	WHITE w/ORANGE	1
2	WHITE w/GREEN	2
3	ORANGE	3
4	GREEN	4
CPLG	CABLE SHEILD	CPLG

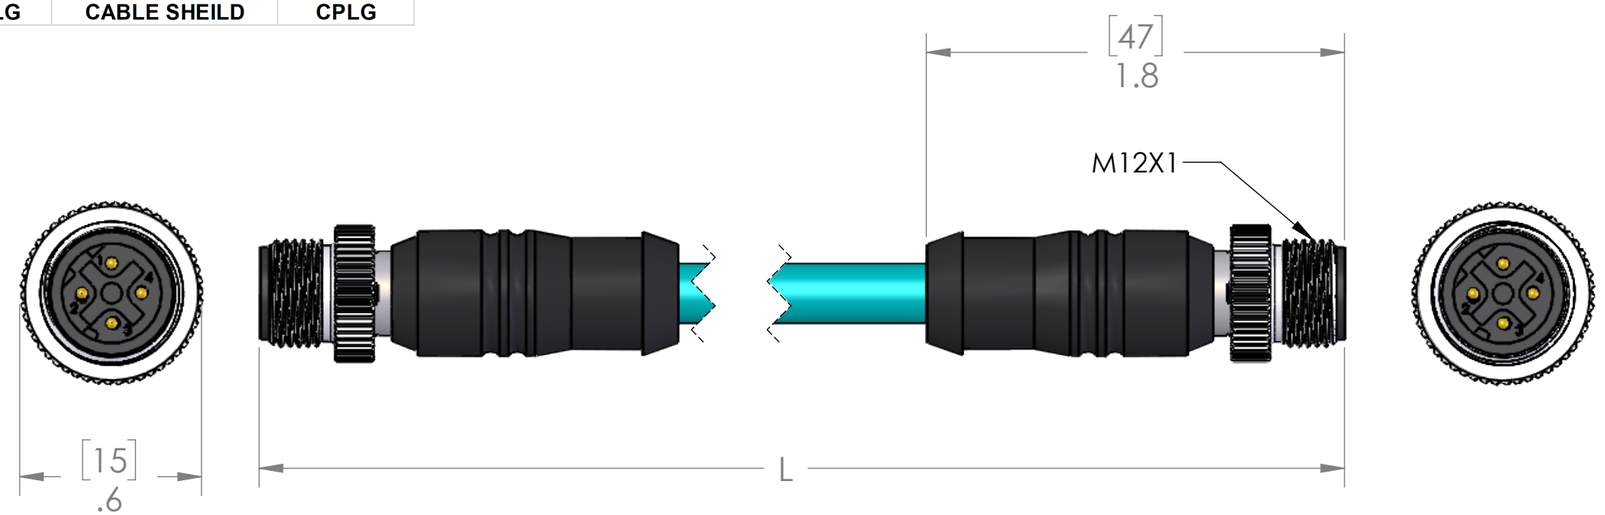

TABLE A		
P/N	L	STD?
MDE45WB-4MMPS-0.5M	20" [0.5M]	NO
MDE45WB-4MMPS-1M	40" [1M]	YES
MDE45WB-4MMPS-1.5M	59" [1.5M]	NO
MDE45WB-4MMPS-2M	79" [2M]	YES
MDE45WB-4MMPS-3M	118" [3M]	NO
MDE45WB-4MMPS-4M	157" [4M]	NO
MDE45WB-4MMPS-5M	197" [5M]	YES
MDE45WB-4MMPS-6M	236" [6M]	NO
MDE45WB-4MMPS-8M	315" [8M]	NO
MDE45WB-4MMPS-10M	393" [10M]	YES
MDE45WB-4MMPS-15M	591" [15M]	YES
MDE45WB-4MMPS-20M	786" [20M]	NO
MDE45WB-4MMPS-25M	983" [25M]	NO
MDE45WB-4MMPS-30M	1179" [30M]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM CAT 5e
AWG:	24 AWG
JACKET:	TEAL TPE
VOLTAGE:	600V
SHIELD:	BRAIDED
FLEX CYCLES:	1MM @ 10X CABLE OD, MIN RADIUS
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	N/A
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	80°C

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	08/25/2023
CHECKED BY	JJH
CHECK DATE	08/25/2023

COMMENTS:

MENCOM CORPORATION

TITLE:

4 PL D-CODED TPE MAL TO MAL

SIZE	DWG. NO.	REV
B	MDE45WB-4MMPS-ZZ	B

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1