

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	1/28/2016	JJH

D

D

C

C

B

B

A

A



MATERIALS:

BODY:	POLYAMIDE
COUPLING:	NICKEL PLATED ZINC
CONTACTS:	GOLD PLATED COPPER ALLOY
GROMMET:	NBR
O-RING:	FPM

SPECIFICATIONS:

WIRE RANGE:	18-24AWG [1.0 - 0.25sqmm]
CABLE RANGE:	0.157 - 0.315 [4 - 8mm]
CONNECTION:	SCREW TERMINALS
VOLTS:	250V
AMPS:	4A
SEAL:	IP67
TEMP RANGE:	STATIC: -40°C - +105°C
	DYNAMIC: -20°C - +105°C

APPROVALS:	
US:	UL LISTED
CANADA:	C-UL LISTED

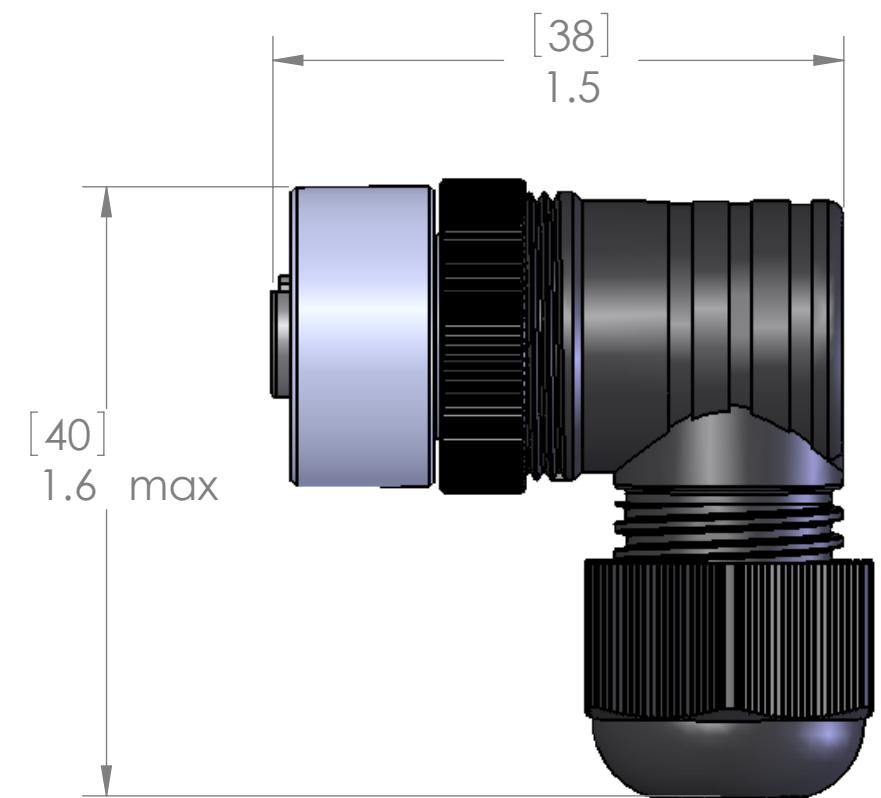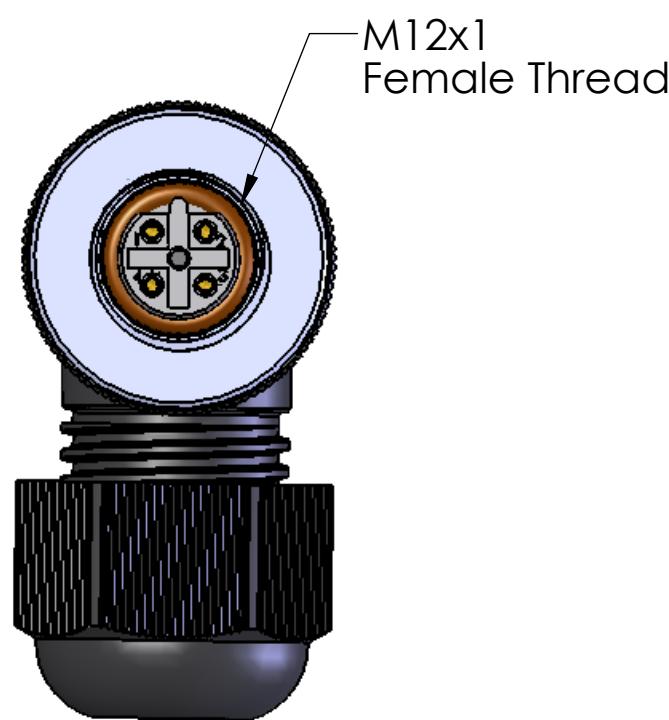

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM	
	CHECKED		
	ENG APPR.		
	MFG APPR.		
	Q.A.	COMMENTS:	
MATERIAL			
FINISH			
DO NOT SCALE DRAWING			

TITLE: DWG. NO. REV.

B MEC-4FP-FW09-R **A**

SCALE: 2:1 WEIGHT: SHEET 1 OF 1