




8 7 6 5 4 3 2 1

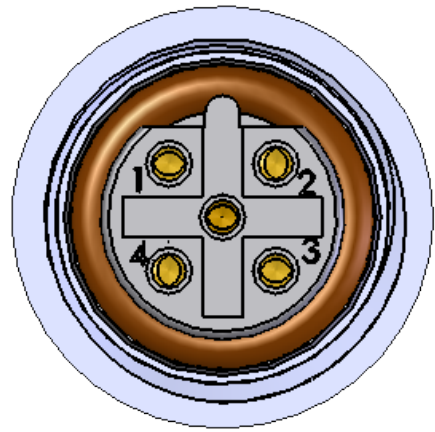

DETAIL C
SCALE 4 : 1

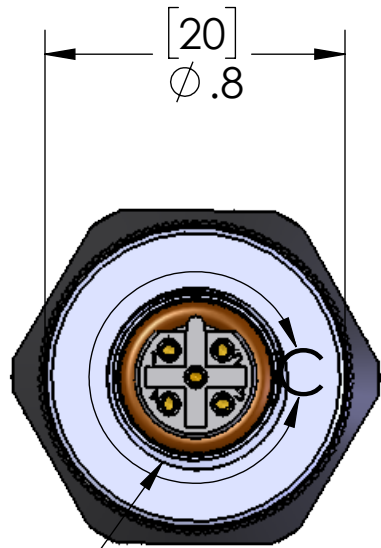

M12x1
FEMALE

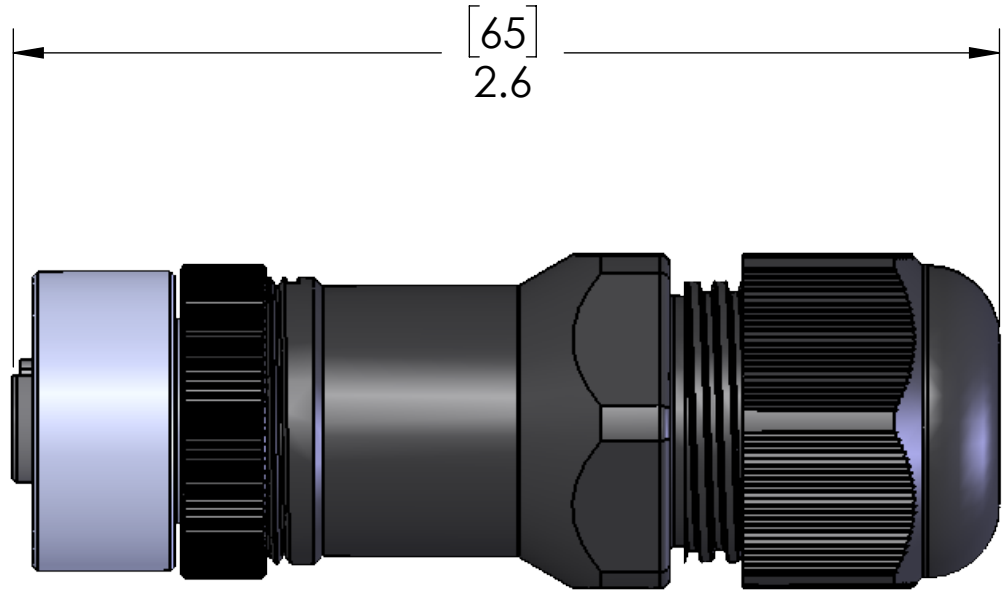

CONNECTION MADE VIA SCREW TERMINALS

MATERIALS	
BODY:	BLACK POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE SEAL:	NBR
INSERT:	POLYAMIDE
COUPLING:	NICKEL PLATED BRASS
RATINGS	
AMPS:	4A max
VOLTS:	250V max
SEAL:	IP67
CABLE RANGE:	18AWG - 24AWG 0.197" - 0.393" (5mm - 10mm) OD
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED

Voltage rating is 250V or the rating of the cable, whichever is less.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	JJH
	DRAWN DATE	03/07/2017
	CHECKED BY	ADM
	CHECK DATE	03/07/2017
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MEC-5FP-FW11	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1