PIN #	WIRING	PIN #
1	---------	1
2	---------	2
3	---------	3
4	---------	4
5	---------	5
	ETC.	
10	---------	10

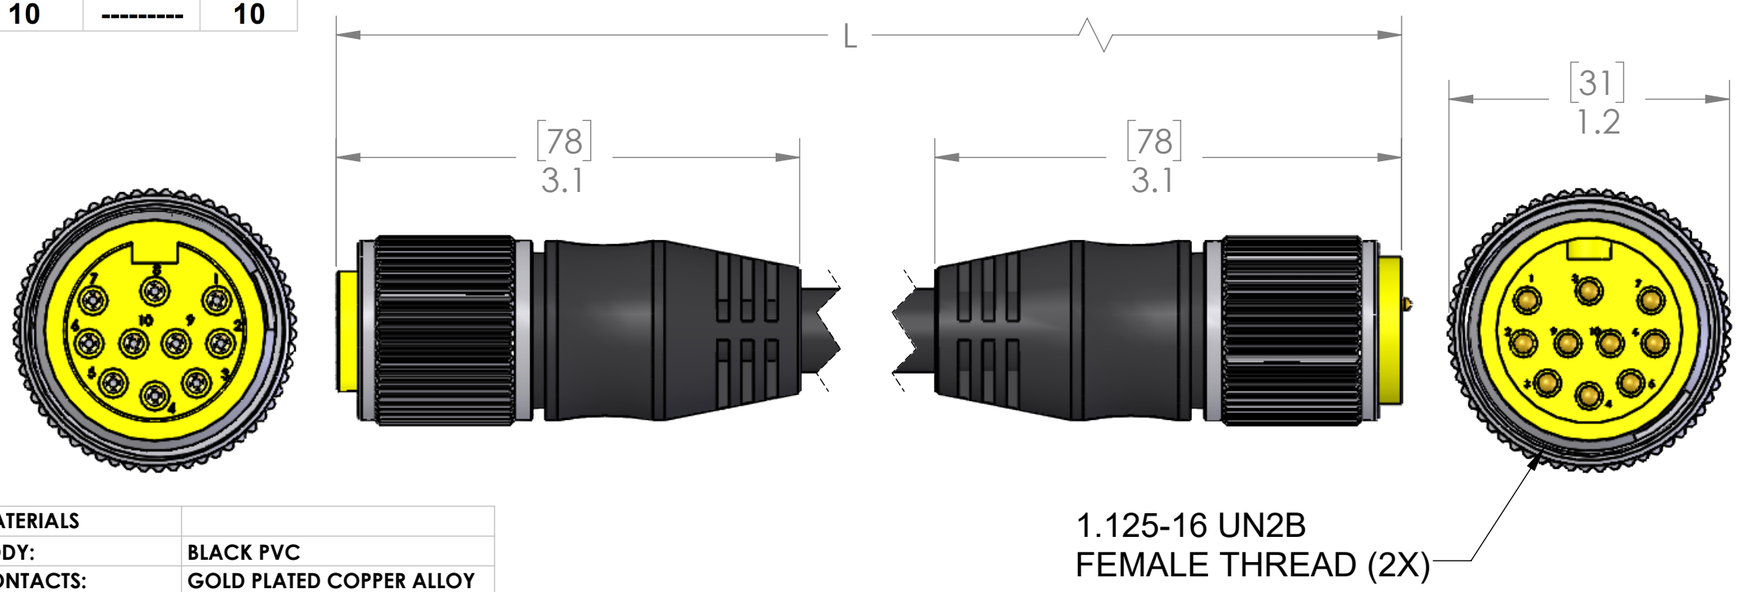

TABLE A		
P/N	L	STD?
MIN-10MFP-3-C011	36" [0.9m]	YES
MIN-10MFP-6-C011	72" [1.8m]	YES
MIN-10MFP-12-C011	144" [3.6m]	YES
MIN-10MFP-20-C011	240" [6.1m]	YES
MIN-10MFP-30-C011	360" [9.1m]	YES
MIN-10MFP-40-C011	480" [12.2m]	NO
MIN-10MFP-50-C011	600" [15.2m]	NO
MIN-10MFP-60-C011	720" [18.3m]	NO
MIN-10MFP-100-C011	1200" [30.5m]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	TC-ER
AWG:	16 AWG
JACKET:	BLACK PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	YELLOW PVC
O-RING:	N/A
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	7A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	JJH
DRAWN DATE	02/02/2024
CHECKED BY	JJH
CHECK DATE	02/06/2024

COMMENTS:

MENCOM CORPORATION

TITLE:

10 PL MIN FEM PLUG TC-ER

SIZE	DWG. NO.	REV
B	MIN-10MFP-ZZ-C011	B

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1