| MALE PIN # | WIRING | FEMALE PIN # |
|---|---|---|
| 1 | --------- | 1 |
| 2 | --------- | 2 |
| 3 | --------- | 3 |
| 4 | --------- | 4 |
| 5 | --------- | 5 |
| | ETC. | |
| 12 | --------- | 12 |

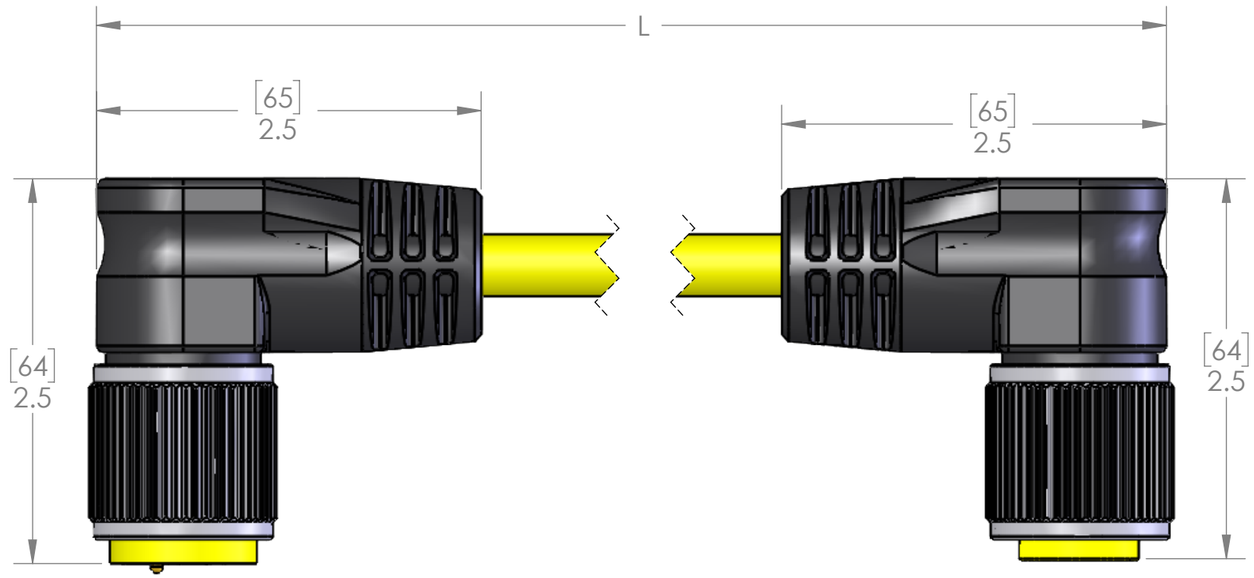


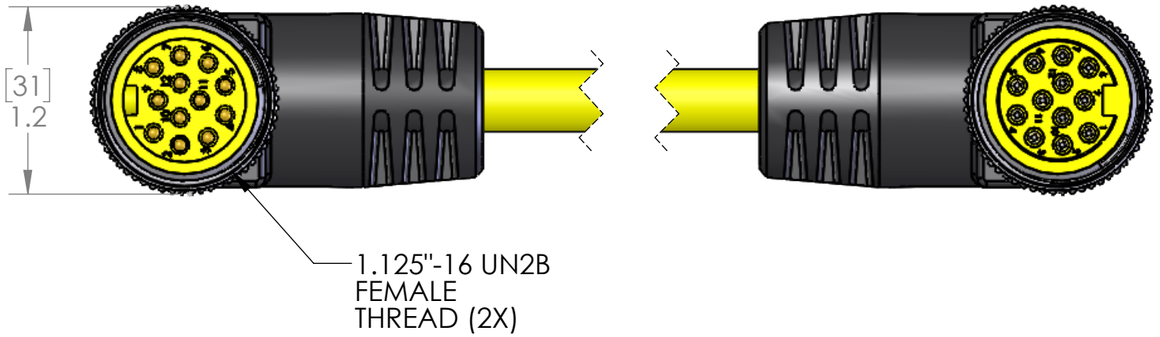


| P/N | L | STD? |
|---|---|---|
| MIN-12MFPX-3-R | 36" [0.9M] | YES |
| MIN-12MFPX-6-R | 72" [1.8M] | YES |
| MIN-12MFPX-12-R | 144" [3.6M] | YES |
| MIN-12MFPX-15-R | 180" [4.6M] | NO |
| MIN-12MFPX-20-R | 240" [6.1M] | YES |
| MIN-12MFPX-30-R | 360" [9.1M] | YES |
| MIN-12MFPX-40-R | 480" [12.2M] | NO |
| MIN-12MFPX-50-R | 600" [15.2M] | NO |
| MIN-12MFPX-60-R | 720" [18.3M] | NO |
| MIN-12MFPX-100-R | 1200" [30.5M] | NO |

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

| MATERIALS | |
|---|---|
| BODY: | BLACK PVC |
| CONTACTS: | GOLD PLATED COPPER ALLOY |
| CABLE: | |
| STYLE: | AWM |
| AWG: | 18 AWG |
| JACKET: | YELLOW PVC |
| VOLTAGE: | 600V |
| SHIELD: | NO |
| COUPLING: | NICKEL PLATED BRASS |
| INSERT: | YELLOW PVC |
| O-RING: | N/A |
| | |
| APPROVALS | |
| US: | UL LISTED |
| CANADA: | C-UL LISTED |
| ROHS: | YES |
| CE & UKCA: | YES |
| | |
| RATINGS | |
| PROTECTION CLASS: | UL TYPE 4 & 12, IEC IP69 |

**PROPRIETARY AND CONFIDENTIAL**
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

| | |
|---|---|
| VOLTS | 300V |
| AMPS | 4A |
| TEMP: | 105°C |

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

| | |
|---|---|
| DRAWN BY | ADM |
| DRAWN DATE | 02/06/2024 |
| CHECKED BY | JJH |
| CHECK DATE | 02/07/2024 |

COMMENTS:

MENCOM CORPORATION

TITLE:

# 12 POLE MAL-FEM PLUG R/A

| SIZE | DWG. NO. | REV |
|---|---|---|
| B | MIN-12MFPX-ZZ-R | C |

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1