MALE PIN #	WIRING	FEMALE PIN #
1	---------	1
2	---------	2
3	---------	3
4	---------	4
5	---------	5
	ETC.	
12	---------	12

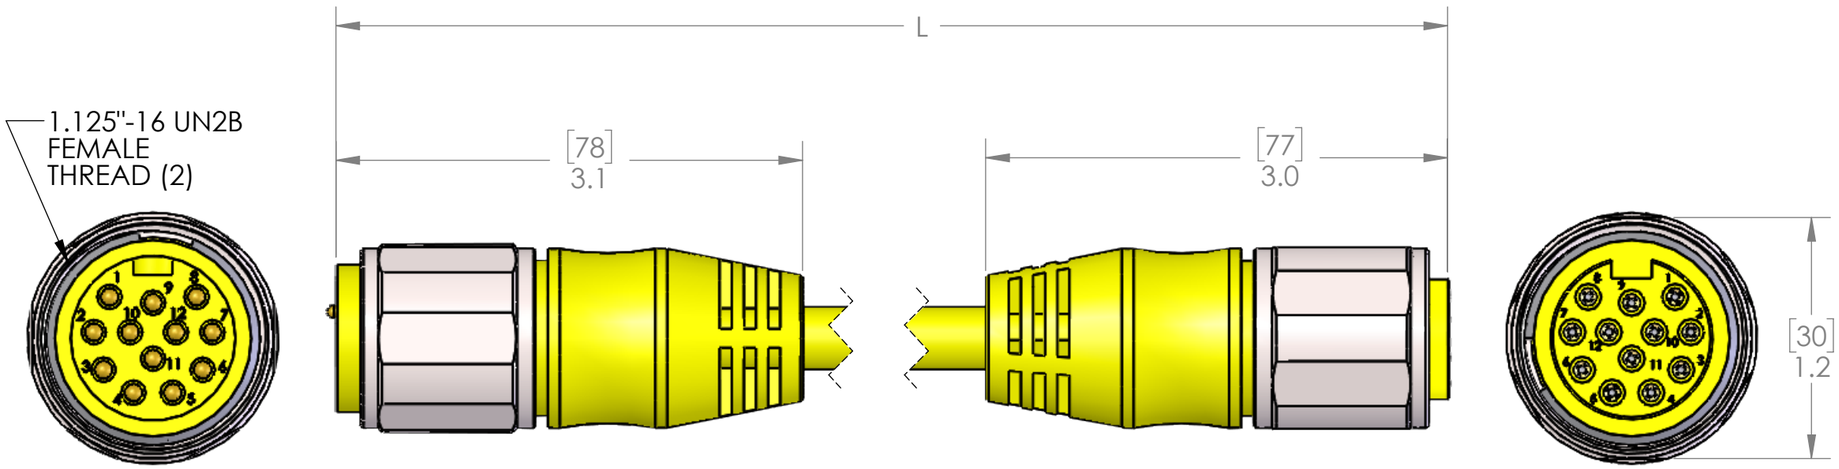

MATERIALS	
BODY:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	18 AWG
JACKET:	YELLOW PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	STAINLESS STEEL
INSERT:	YELLOW PVC
O-RING:	N/A
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

TABLE A		
P/N	L	STD?
MIN-12MFPX-3-SS	36" [0.9m]	YES
MIN-12MFPX-6-SS	72" [1.8m]	YES
MIN-12MFPX-12-SS	144" [3.6m]	YES
MIN-12MFPX-20-SS	240" [6.1m]	YES
MIN-12MFPX-30-SS	360" [9.1m]	YES
MIN-12MFPX-40-SS	480" [12.2m]	NO
MIN-12MFPX-50-SS	600" [15.2m]	NO
MIN-12MFPX-60-SS	720" [18.3m]	NO
MIN-12MFPX-100-SS	1200" [30.5m]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	02/22/2024
CHECKED BY	JJH
CHECK DATE	02/28/2024

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE B | DWG. NO. MIN-12MFPX-ZZ-SS | REV C

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1