MALE	WIRING	FEMALE
PIN #		PIN #
1	---------	1
2	---------	2
3	---------	3
4	---------	4
5	---------	5
	ETC.	
12	---------	12

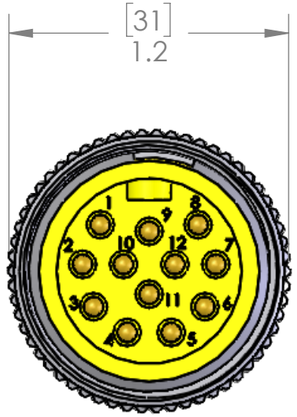

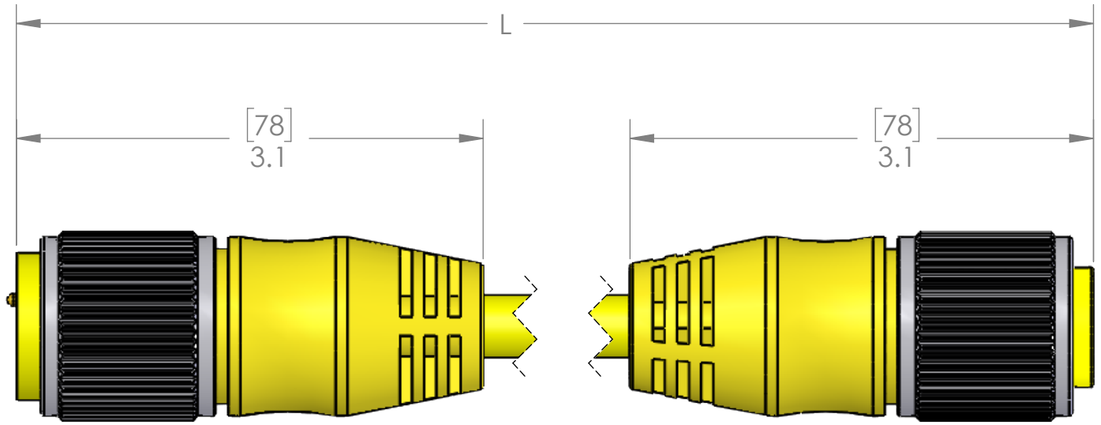



1.125"-16 UN2B
FEMALE
THREAD (2x)

TABLE A		
P/N	L	STD?
MIN-12MFPX-3	36" [0.9m]	YES
MIN-12MFPX-6	72" [1.8m]	YES
MIN-12MFPX-12	144" [3.7m]	YES
MIN-12MFPX-20	240" [6.1m]	YES
MIN-12MFPX-30	360" [9.1m]	YES
MIN-12MFPX-40	480" [12.2m]	NO
MIN-12MFPX-50	600" [15.2m]	NO
MIN-12MFPX-60	720" [18.3m]	NO
MIN-12MFPX-80	960" [24.4m]	NO
MIN-12MFPX-100	1200" [30.5m]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS	
BODY:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	18 AWG
JACKET:	YELLOW PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	YELLOW PVC
O-RING:	N/A
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	02/06/2024
CHECKED BY	JJH
CHECK DATE	02/07/2024

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE B | DWG. NO. MIN-12MFPX-ZZ | REV C

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1