FEMALE	WIRING	MALE
PIN #		PIN #
1	---------	1
2	---------	2
3	---------	3
4	---------	4
5	---------	5
	ETC.	
12	---------	12

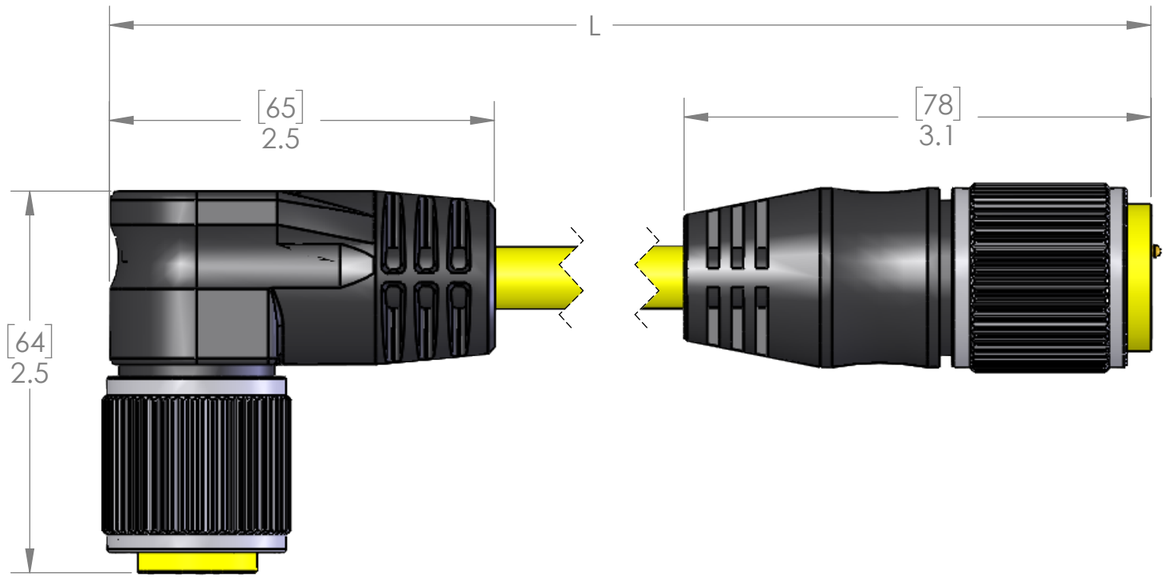

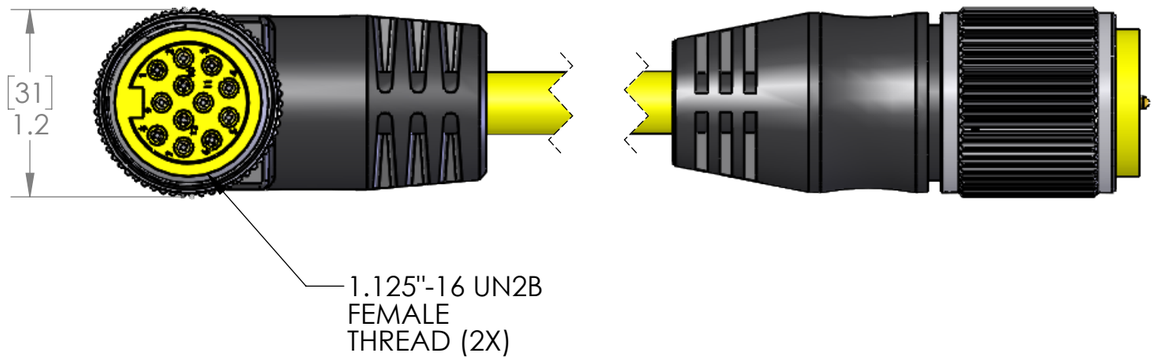

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	18 AWG
JACKET:	YELLOW PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	YELLOW PVC
O-RING:	N/A
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

P/N	L	STD?
MIN-12MFRPX-3	36" [0.9M]	YES
MIN-12MFRPX-6	72" [1.8M]	YES
MIN-12MFRPX-12	144" [3.6M]	YES
MIN-12MFRPX-15	180" [4.6M]	NO
MIN-12MFRPX-20	240" [6.1M]	YES
MIN-12MFRPX-30	360" [9.1M]	YES
MIN-12MFRPX-40	480" [12.2M]	NO
MIN-12MFRPX-50	600" [15.2M]	NO
MIN-12MFRPX-60	720" [18.3M]	NO
MIN-12MFRPX-100	1200" [30.5M]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	02/22/2024
CHECKED BY	JJH
CHECK DATE	02/28/2024

COMMENTS:

MENCOM CORPORATION

TITLE:

12 POLE M-F EXT PLUG

SIZE	DWG. NO.	REV
B	MIN-12MFRPX-ZZ	C

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1