PIN #	COLOR
1	ORANGE
2	BLUE
3	WHITE w/BLACK
4	RED w/BLACK
5	GREEN w/BLACK
6	ORANGE w/BLACK
7	BLUE w/BLACK
8	BLACK w/WHITE
9	GREEN / YELLOW
10	RED
11	WHITE
12	BLACK

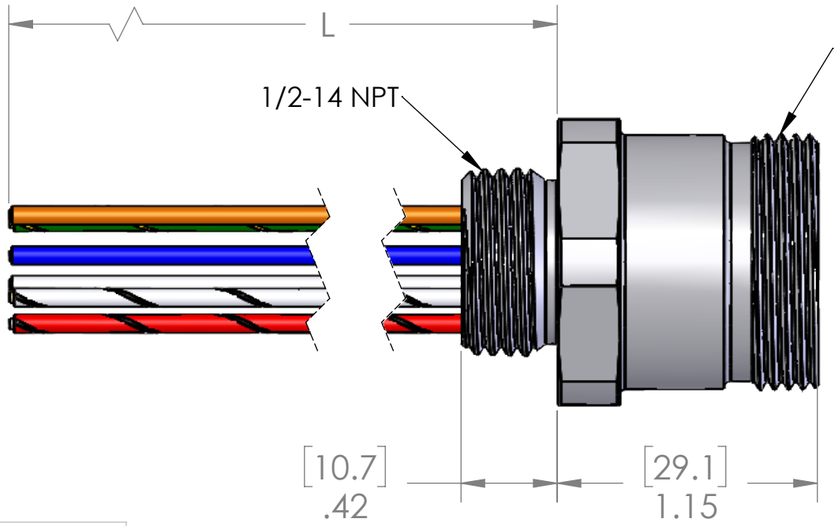

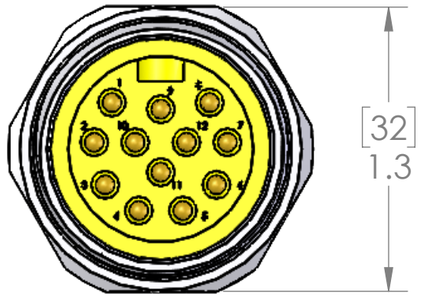

P/N	L
MIN-12MR-1-18	12" [0.3m]
MIN-12MR-2-18	24" [0.6m]
MIN-12MR-3-18	36" [0.9m]
MIN-12MR-4-18	48" [1.2m]
MIN-12MR-5-18	60" [1.5m]
MIN-12MR-6-18	72" [1.8m]
MIN-12MR-10-18	120" [3.0m]
MIN-12MR-15-18	180" [4.6m]

OTHER LENGTHS AVAILABLE
PLEASE CONSULT FACTORY

AN O-RING AND LOCKNUT ARE INCLUDED
ON LENGTHS OF 24" [0.6M] AND LONGER.

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1007/1569
AWG:	18 AWG
JACKET:	PVC
VOLTAGE:	300V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	ZINC PLATED STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	02/22/2024
CHECKED BY	JJH
CHECK DATE	02/28/2024

COMMENTS:

MENCOM CORPORATION

TITLE:
12 PL MIN ML RECP

SIZE B | DWG. NO. MIN-12MR-ZZ-18 | REV C

SCALE: 1.5:1 | WEIGHT: | SHEET 1 OF 1