

PIN #	COLOR
1	ORANGE
2	BLUE
3	WHITE w/BLACK
4	RED w/BLACK
5	GREEN w/BLACK
6	ORANGE w/BLACK
7	BLUE w/BLACK
8	BLACK w/WHITE
9	GREEN / YELLOW
10	RED
11	WHITE
12	BLACK

D

D

C

C


B

B

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1007/1569
AWG:	22 AWG
JACKET:	PVC
VOLTAGE:	300V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	NICKEL PLATED BRASS
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

A

A

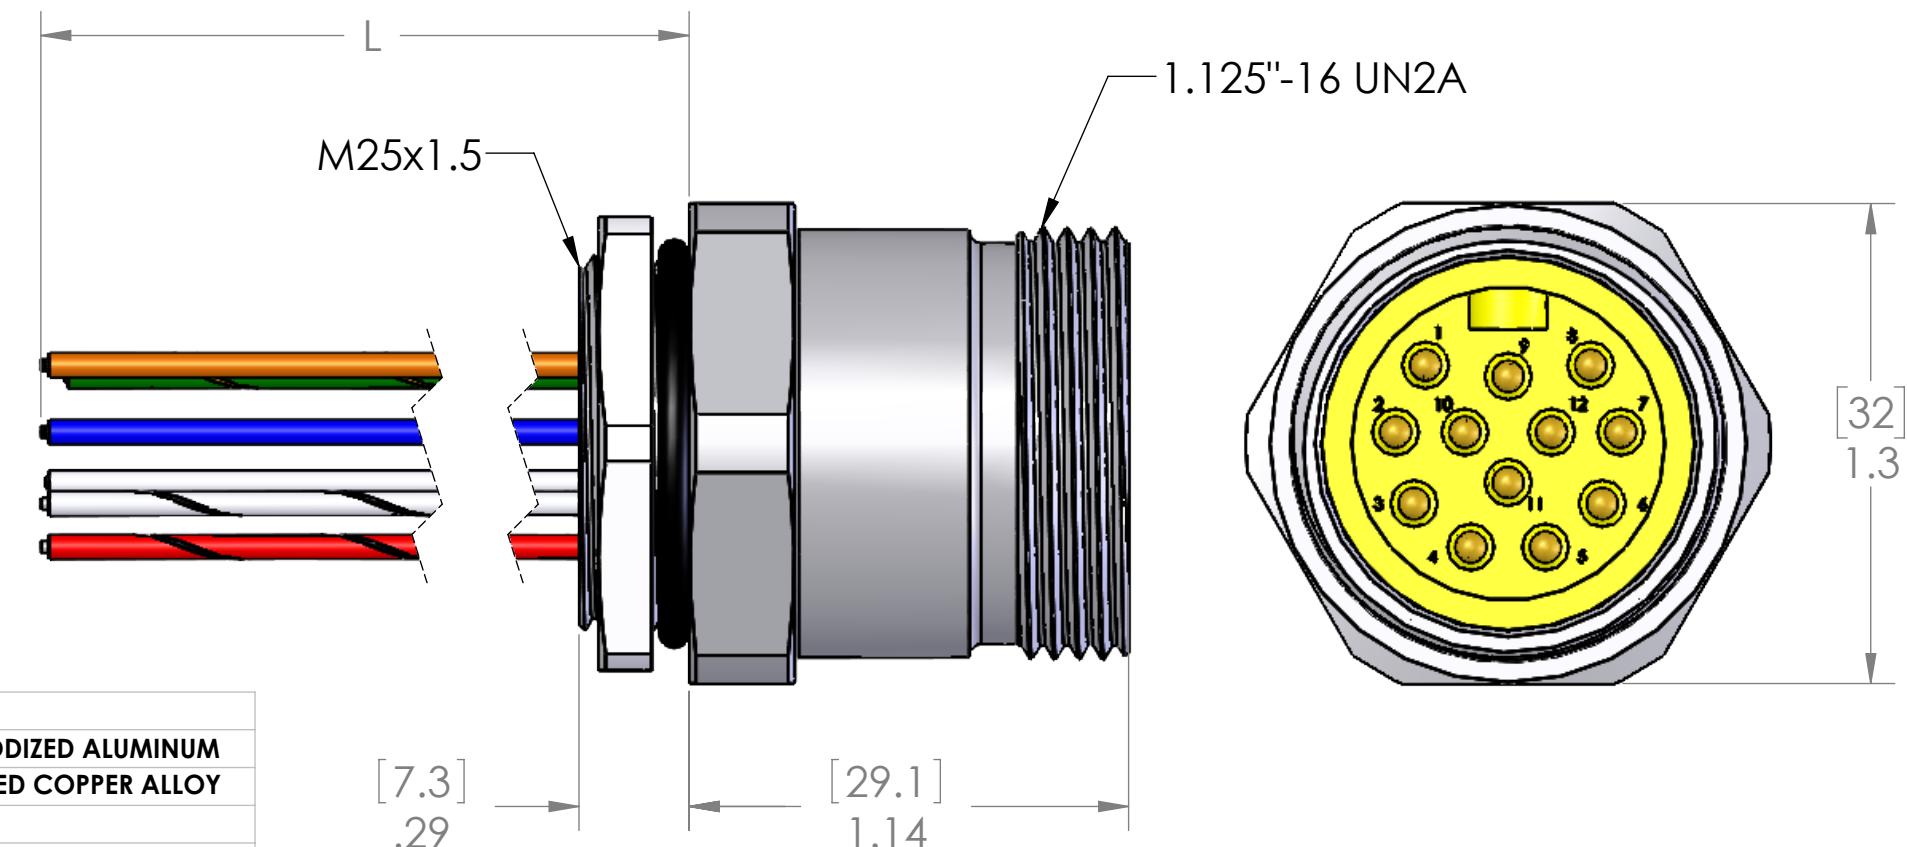

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

VOLTS 300V  
AMPS 4A  
TEMP: 105°C

UNLESS OTHERWISE SPECIFIED: DRAWN BY ADM  
DIMENSIONS ARE IN INCHES DRAWN DATE 02/23/2024  
AND [MM] CHECKED BY JJH  
CHECK DATE 02/28/2024  
COMMENTS:  
MATERIAL FINISH  
DO NOT SCALE DRAWING

P/N	L
MIN-12MR-1-22-M25	12" [0.3m]
MIN-12MR-2-22-M25	24" [0.6m]
MIN-12MR-3-22-M25	36" [0.9m]
MIN-12MR-4-22-M25	48" [1.2m]
MIN-12MR-5-22-M25	60" [1.5m]
MIN-12MR-6-22-M25	72" 1.8m]
MIN-12MR-10-22-M25	120" [3m]

OTHER LENGTHS ARE AVAILABLE  
PLEASE CONSULT FACTORY

MENCOM CORPORATION

TITLE:	
SIZE	DWG. NO.
B	MIN-12MR-ZZ-22-M25
REV B	
SCALE: 2:1	WEIGHT:
SHEET 1 OF 1	