


PIN #	COLOR	PIN #	COLOR
1	VIOLET	11	BLACK
2	RED	12	GRN / YEL
3	GRAY	13	YELLOW w/BRWN
4	RED w/BLUE	14	BROWN w/GRN
5	BLUE	15	WHITE
6	GREEN	16	YELLOW
7	BROWN	17	PINK
8	WHITE w/GRN	18	GRAY w/BRWN
9	WHITE w/YEL	19	GRAY w/PINK
10	WHITE w/GRY		

PINS 5, 7 & 12 ARE 18AWG

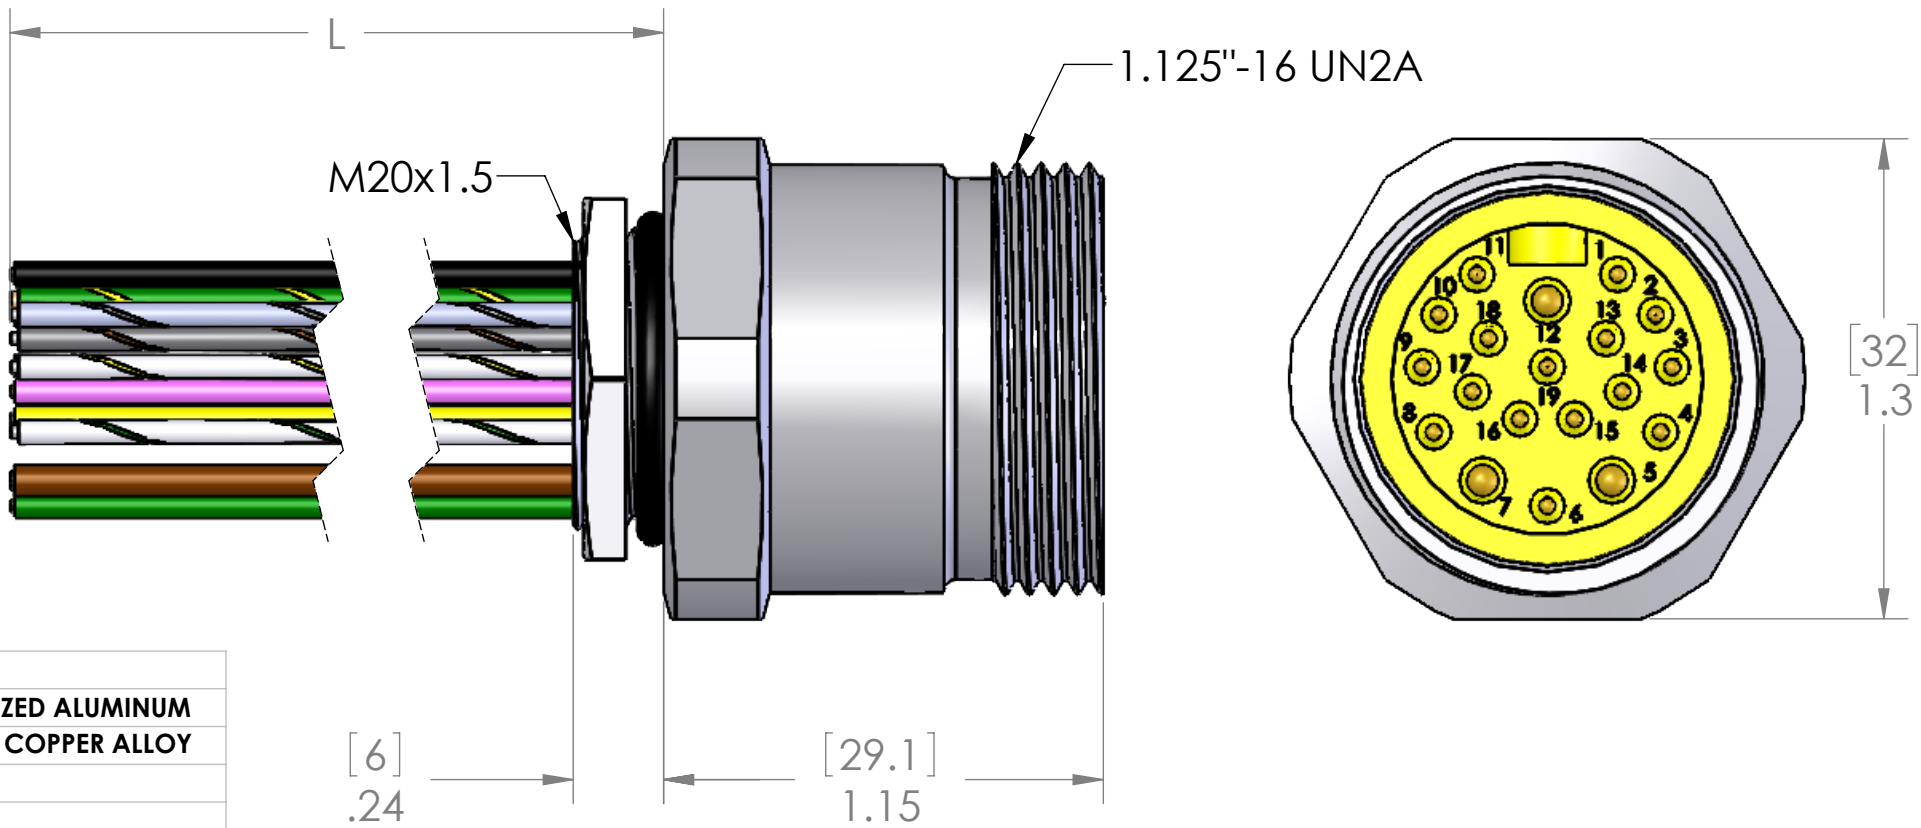

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1007/1569
AWG:	18 & 22 AWG
JACKET:	PVC
VOLTAGE:	300V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	NICKEL PLATED BRASS
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

Please note that to better serve the varying needs of our customers, these parts have been UL tested for two different amperage ratings as shown by our Ratings table.

RATINGS:	
PIN 12	GROUND
PINS 5 & 7	300V, 6A
ALL OTHERS	300V, 1A
OR	
PIN 12	GROUND
PINS 5 & 7	300V, 4A
ALL OTHERS	300V, 2A

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	6A/1A OR 4A/2A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	02/28/2024
		CHECKED BY	JJH
		CHECK DATE	02/29/2024
		COMMENTS:	
MATERIAL			
FINISH			
DO NOT SCALE DRAWING			

TABLE A	
P/N	L
MIN-19MR-0.3M-M20	12" [0.3m]
MIN-19MR-0.5M-M20	20" [0.5m]
MIN-19MR-0.6M-M20	24" [0.6m]
MIN-19MR-1M-M20	40" [1m]
MIN-19MR-2M-M20	79" [2m]
MIN-19MR-3M-M20	118" [3m]
MIN-19MR-5M-M20	197" [5m]
MIN-19MR-10M-M20	393" [10m]

OTHER LENGTHS AVAILABLE  
CONSULT FACTORY

MENCOM CORPORATION			
TITLE: 19 PL MIN ML RECP			
SIZE B	DWG. NO. MIN-19MR-ZZ-M20		REV B
SCALE: 2:1	SHEET 1 OF 1		