



[illegible][illegible][illegible]

WIRING		
1	---	1
2	---	2

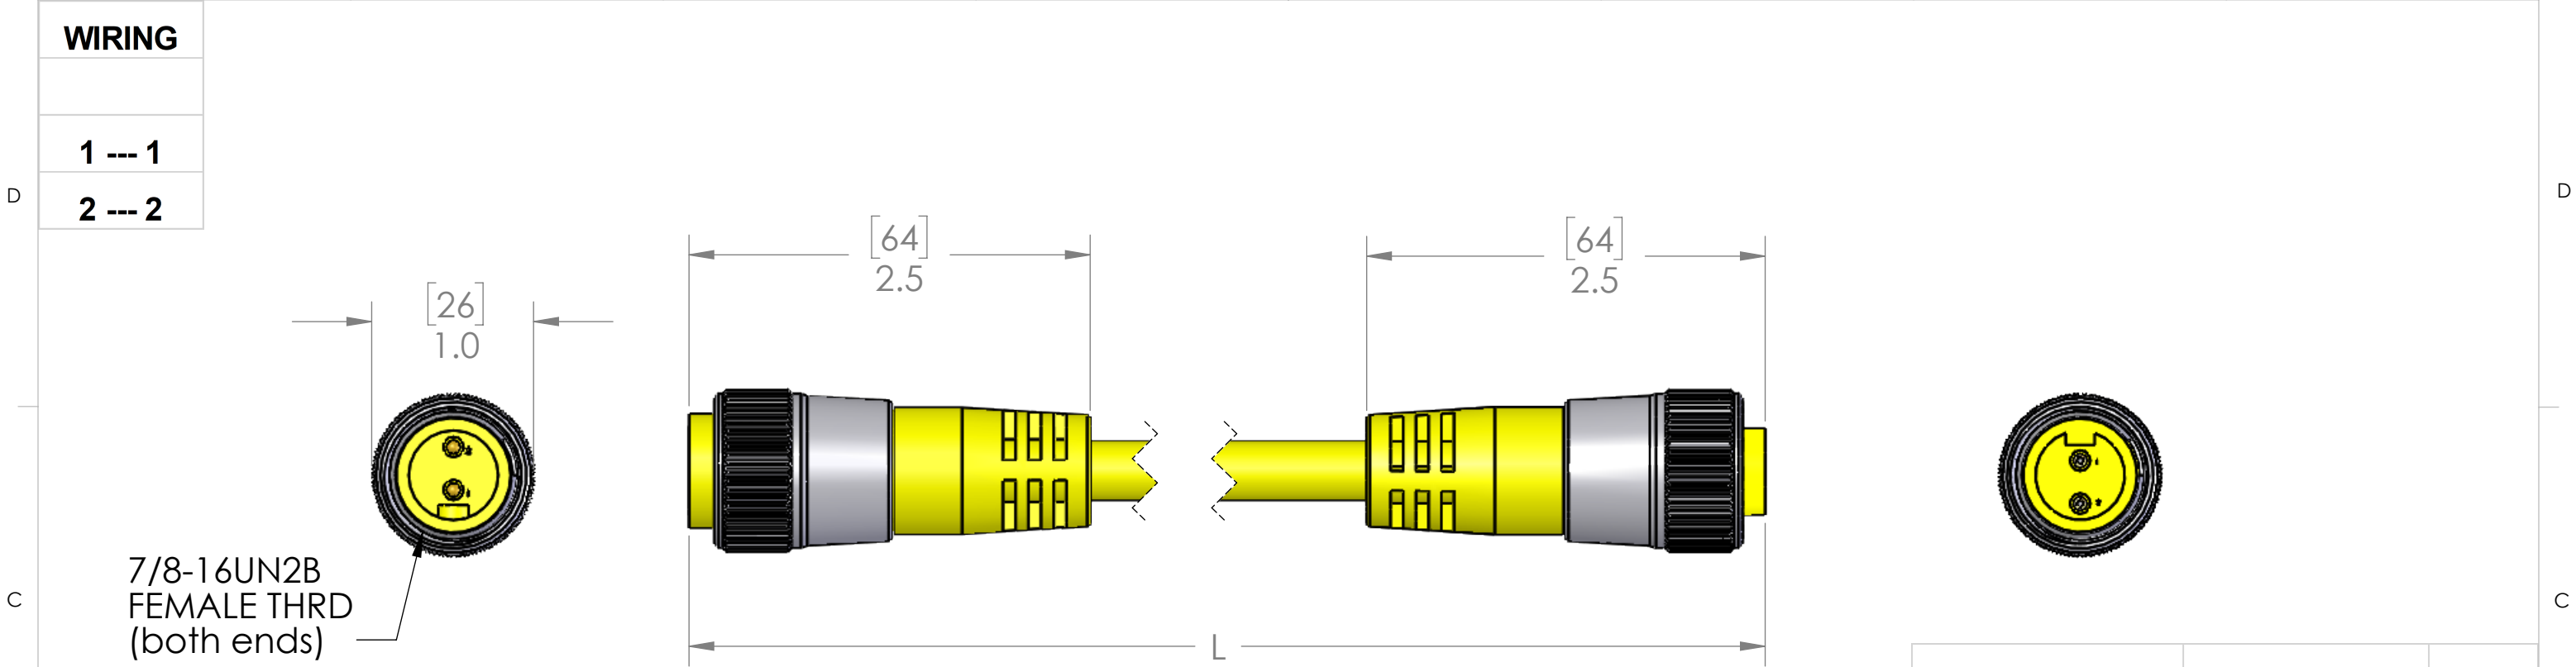



Technical drawing of a yellow industrial cable with dimensions and wiring diagram.

Dimensions:

- Overall length: L
- End fitting length: [64] 2.5
- End fitting diameter: [26] 1.0

Wiring diagram:

- 7/8-16UN2B FEMALE THRD (both ends)
- Wiring connections: 1 --- 1, 2 --- 2

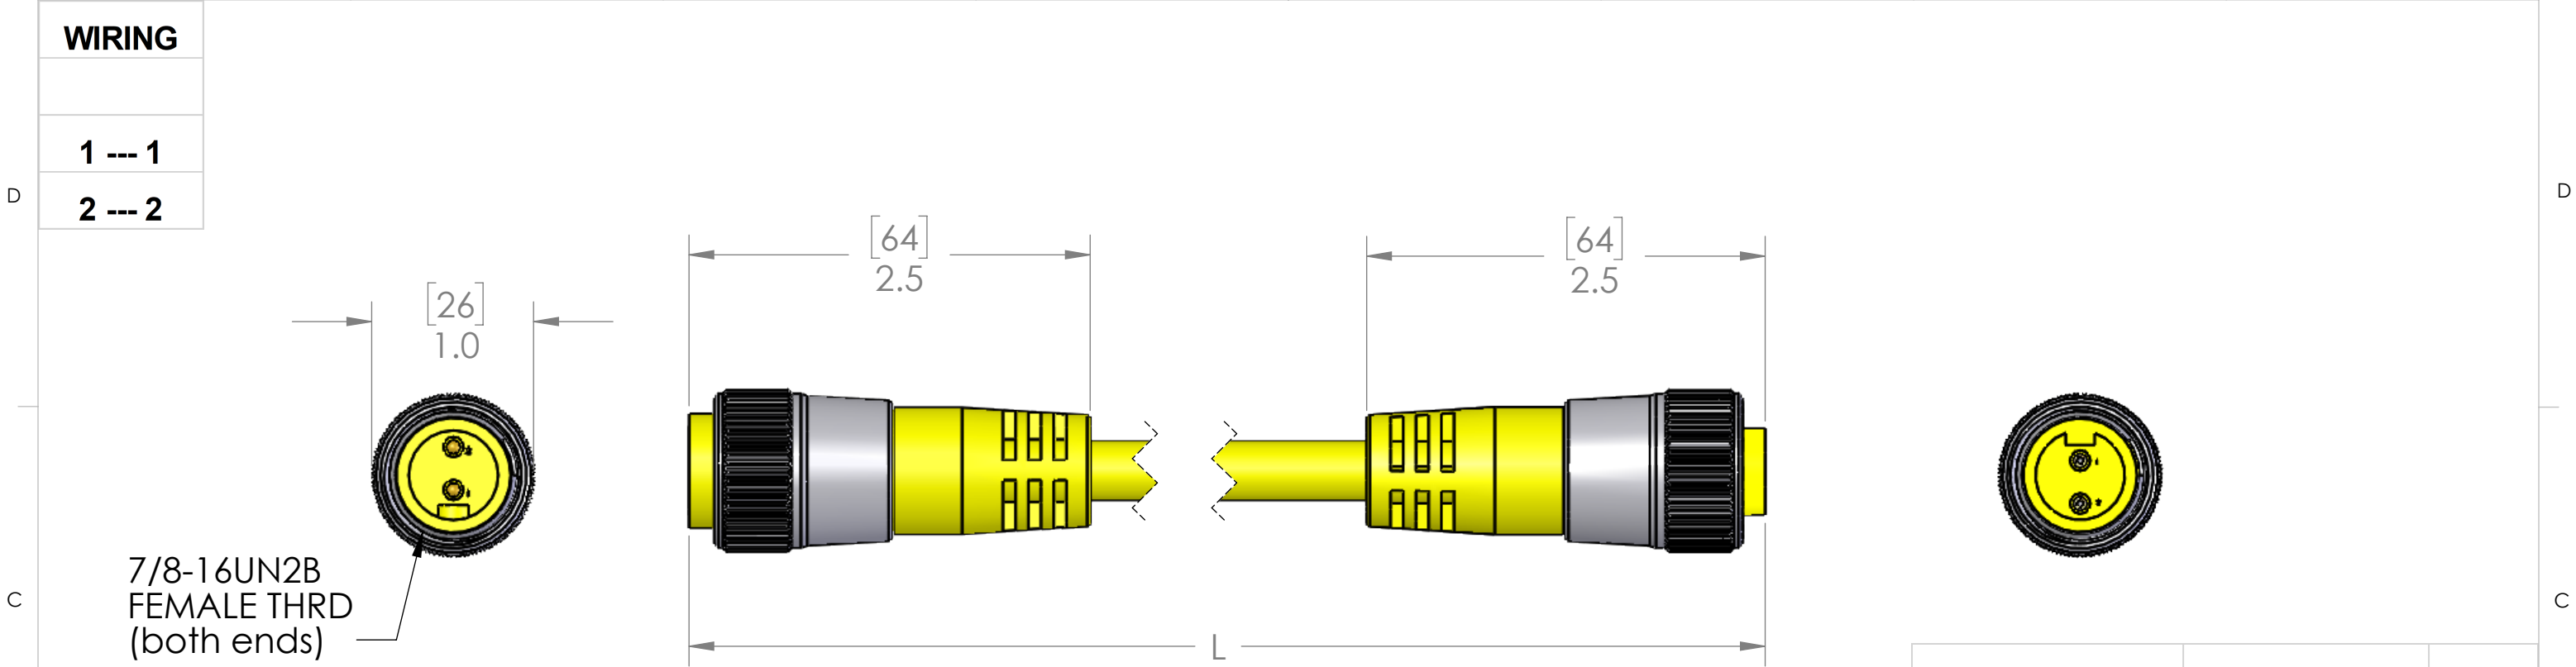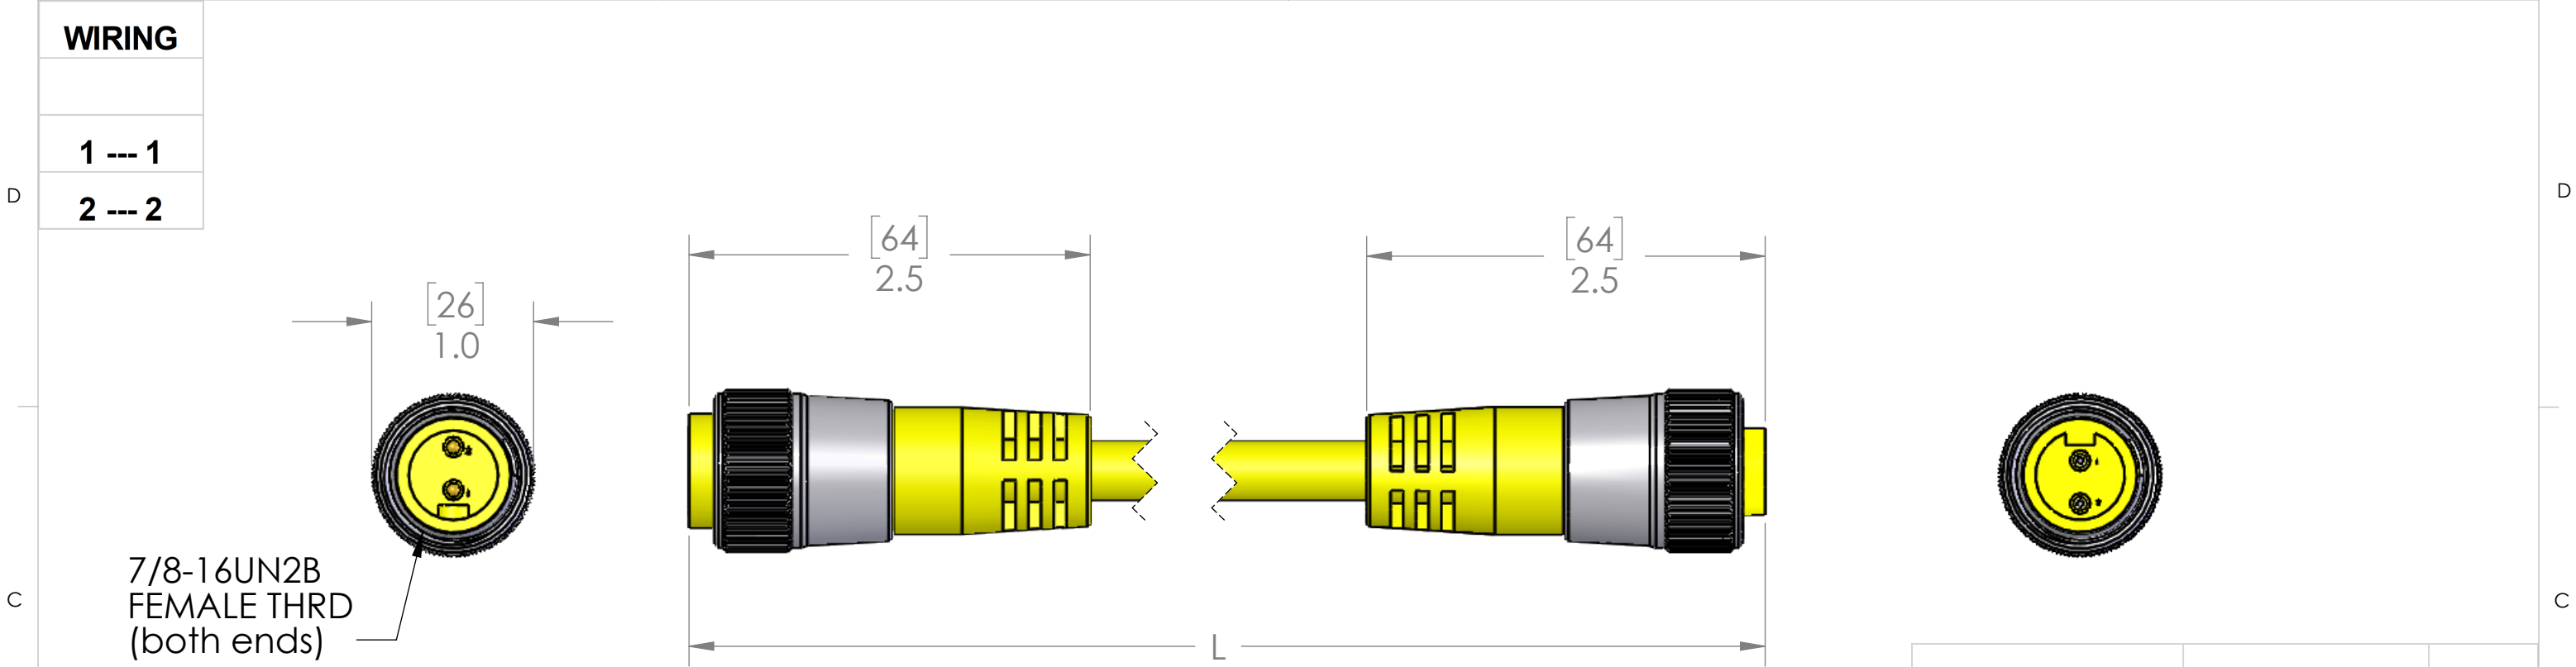

(both ends)		L		P/N	L	STD?
B	MATERIALS			MIN-2MFP-3	36" [0.9m]	YES
	BODY:	YELLOW PVC		MIN-2MFP-6	72" [1.8m]	YES
	CONTACTS:	GOLD PLATED COPPER ALLOY		MIN-2MFP-12	144" [3.6m]	YES
	CABLE:			MIN-2MFP-15	180" [4.6m]	NO
	STYLE:	STOOW		MIN-2MFP-20	240" [6.1m]	YES
	AWG:	16 AWG		MIN-2MFP-30	360" [9.1m]	YES
	JACKET:	YELLOW PVC		MIN-2MFP-40	480" [10.2m]	NO
	VOLTAGE:	600V		MIN-2MFP-50	600" [15.2m]	YES
	SHIELD:	NO		MIN-2MFP-60	720" [18.3m]	NO

(both ends)		L		P/N		L		STD?	
				MIN-2MFP-3		36" [0.9m]		YES	
				MIN-2MFP-6		72" [1.8m]		YES	
				MIN-2MFP-12		144" [3.6m]		YES	
				MIN-2MFP-15		180" [4.6m]		NO	
				MIN-2MFP-20		240" [6.1m]		YES	
				MIN-2MFP-30		360" [9.1m]		YES	
				MIN-2MFP-40		480" [10.2m]		NO	
				MIN-2MFP-50		600" [15.2m]		YES	
				MIN-2MFP-60		720" [18.3m]		NO	
				PARTS LISTED AS NOT BEING STANDARD MAY HAVE MINIMUM ORDER QUANTITIES					

B	MATERIALS	
	BODY:	YELLOW PVC
	CONTACTS:	GOLD PLATED COPPER ALLOY
	CABLE:	
	STYLE:	STOOW
	AWG:	16 AWG
	JACKET:	YELLOW PVC
	VOLTAGE:	600V
	SHIELD:	NO
	COUPLING:	NICKEL PLATED BRASS
A	INSERT:	YELLOW PVC
	O-RING:	N/A
	APPROVALS	
	US:	UL LISTED
	CANADA:	C-UL LISTED
	ROHS:	YES
	CE & UKCA:	YES
	RATINGS	
	PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

[illegible][illegible][illegible][illegible]