


PIN #	COLOR
1	WHITE
2	BLACK

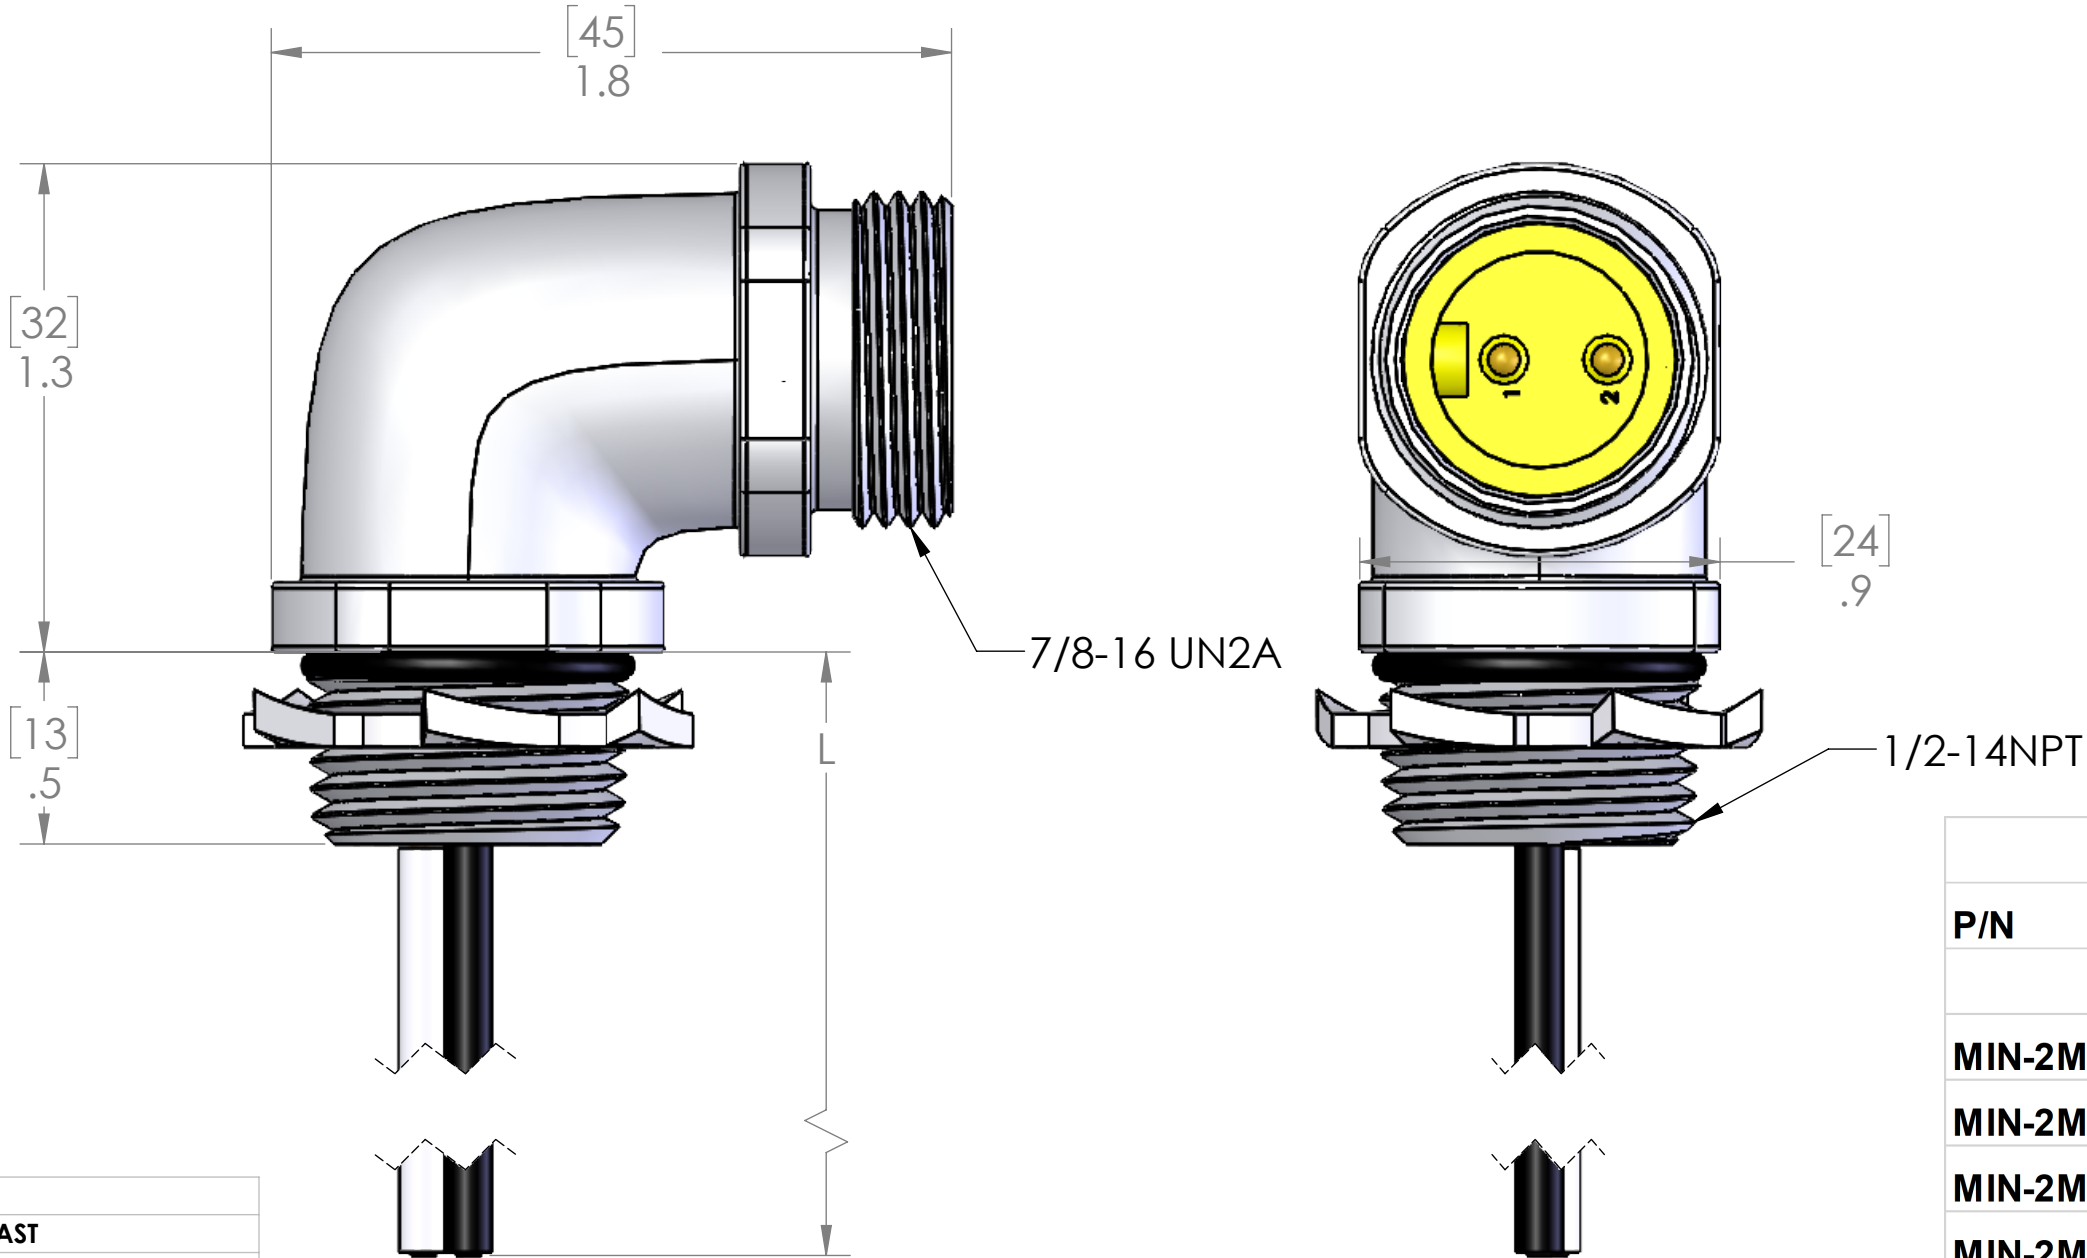

MATERIALS	
SHELL:	ZINC DIE CAST
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1015
AWG:	16 AWG
JACKET:	PVC
VOLTAGE:	600V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	ZINC PLATED STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

TABLE A	
P/N	L
MIN-2MR-1-R	10" [0.3m]
MIN-2MR-2-R	22" [0.6m]
MIN-2MR-3-R	36" [0.9m]
MIN-2MR-4-R	48" [1.2m]
MIN-2MR-5-R	60" [1.5m]
MIN-2MR-6-R	72" [1.8m]
MIN-2MR-10-R	120" [4.7m]

OTHER LENGTHS ARE AVAILABLE
PLEASE CONSULT FACTORY

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	600V
AMPS	13A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	GO
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	10/31/2023
	CHECKED BY	JJH
	CHECK DATE	11/01/2023
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MIN-2MR-ZZ-R	C
SCALE: 1:2	WEIGHT:	SHEET 1 OF 1