


PIN #	COLOR
1	GREEN / YELLOW
2	RED w/BLACK
3	RED w/WHITE

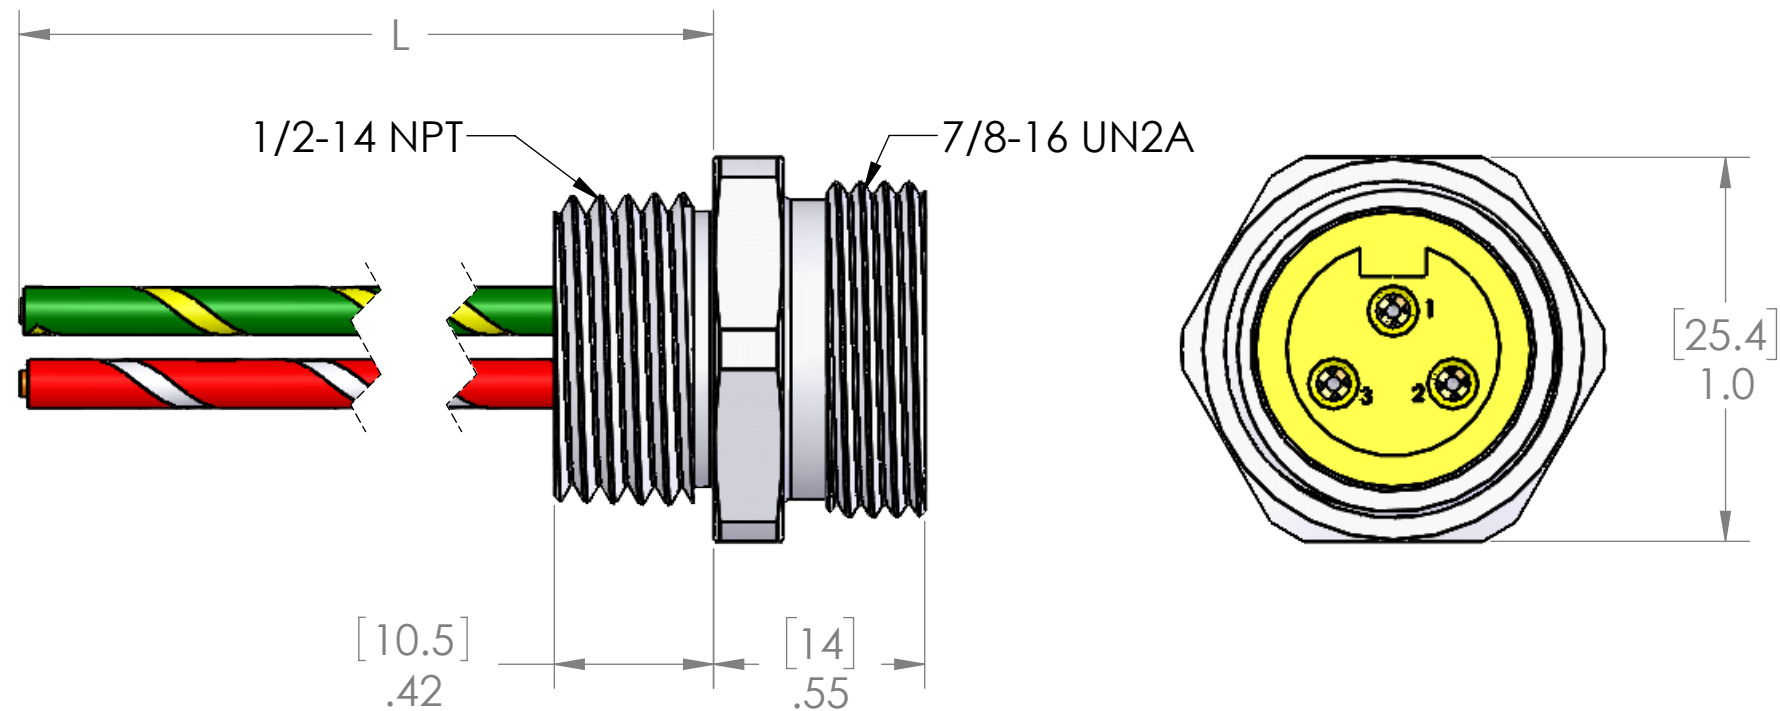

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1015
AWG:	16 AWG
JACKET:	PVC
VOLTAGE:	600V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	ZINC PLATED STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

AN O-RING AND LOCKNUT ARE INCLUDED
ON LENGTHS OF 24" [0.6M] AND LONGER.

P/N	L
MIN-3FR-1A	12" [0.3m]
MIN-3FR-2A	24" [0.6m]
MIN-3FR-3A	36" [0.9m]
MIN-3FR-4A	48" [1.2m]
MIN-3FR-5A	60" [1.5m]
MIN-3FR-6A	72" [1.8m]
MIN-3FR-8A	96" [2.4m]
MIN-3FR-10A	120" [3m]

OTHER LENGTHS ARE AVAILABLE
PLEASE CONSULT FACTORY

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	ADM	MENCOM CORPORATION							
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	09/19/2023					TITLE:			
		CHECKED BY	JJH								
		CHECK DATE	10/30/2023								
		COMMENTS:									
MATERIAL											
FINISH											
DO NOT SCALE DRAWING											
				SIZE	DWG. NO.		REV				
				B	MIN-3FR-ZZA		B				
				SCALE: 2:1		WEIGHT:	SHEET 1 OF 1				

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	600V
AMPS	13A
TEMP:	105°C

DO NOT SCALE DRAWING