WIRING
1 --- 1
2 --- 2
3 --- 3



[26]
1.0

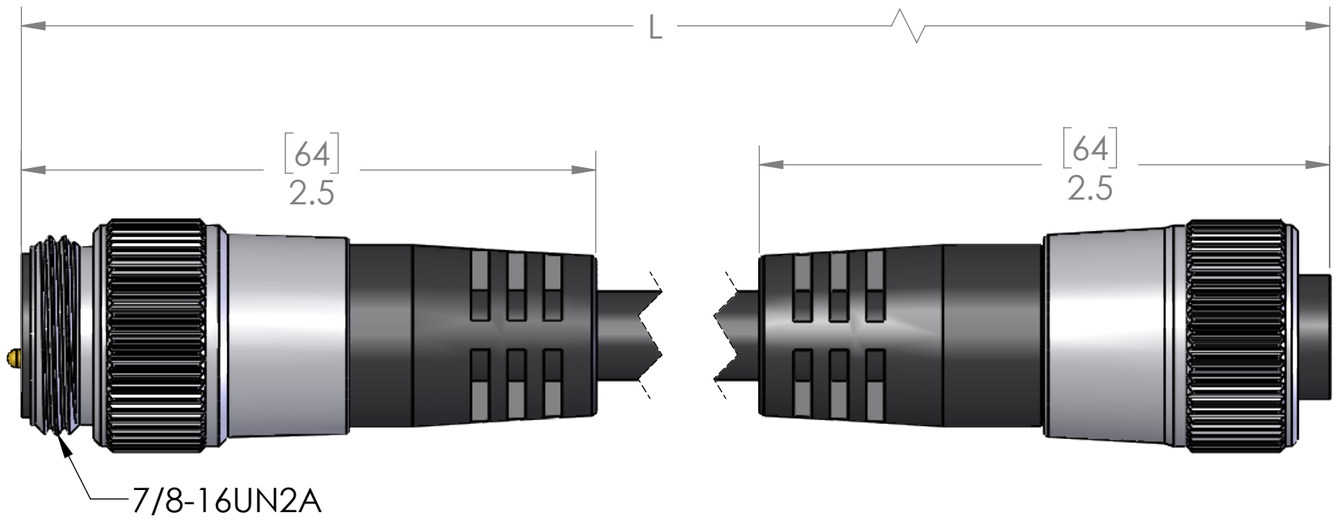

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	STOOW
AWG:	16 AWG
JACKET:	BLACK PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	BLACK PVC
O-RING:	N/A
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

P/N	L	STD?
MIN-3MFPM-3-B	36" [0.9m]	YES
MIN-3MFPM-6-B	72" [1.8m]	YES
MIN-3MFPM-12-B	144" [3.7m]	YES
MIN-3MFPM-15-B	180" [4.6m]	NO
MIN-3MFPM-20-B	240" [6.1m]	YES
MIN-3MFPM-30-B	360" [9.1m]	YES
MIN-3MFPM-40-B	480" [12.2m]	NO
MIN-3MFPM-50-B	600" [15.2m]	YES
MIN-3MFPM-60-B	720" [18.3m]	NO
MIN-3MFPM-100-B	1200" [30.5m]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	13A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	JJH
DRAWN DATE	10/18/2021
CHECKED BY	ADM
CHECK DATE	10/18/2021

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
B	MIN-3MFPM-ZZ-B	A

SCALE: 3:2 | WEIGHT: | SHEET 1 OF 1