

WIRING

1 --- 1

2 --- 2

3 --- 3



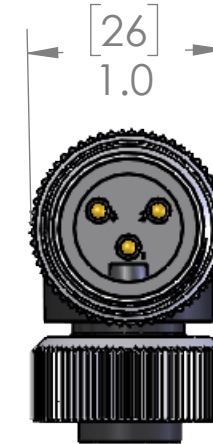


TABLE A

P/N	L	STD?
MIN-3MMFRP-1.5-B	18" [0.45m]	NO
MIN-3MMFRP-3-B	36" [0.9m]	YES
MIN-3MMFRP-6-B	72" [1.8m]	YES
MIN-3MMFRP-12-B	144" [3.7m]	YES
MIN-3MMFRP-20-B	240" [6.1m]	YES
MIN-3MMFRP-9M-B	355" [9m]	NO
MIN-3MMFRP-30-B	360" [9.1m]	YES
MIN-3MMFRP-40-B	480" [12.2m]	NO
MIN-3MMFRP-50-B	600" [15.2m]	YES
MIN-3MMFRP-60-B	720" [18.3m]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	STOOW
AWG:	16 AWG
JACKET:	BLACK PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	BLACK PVC
O-RING:	N/A
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

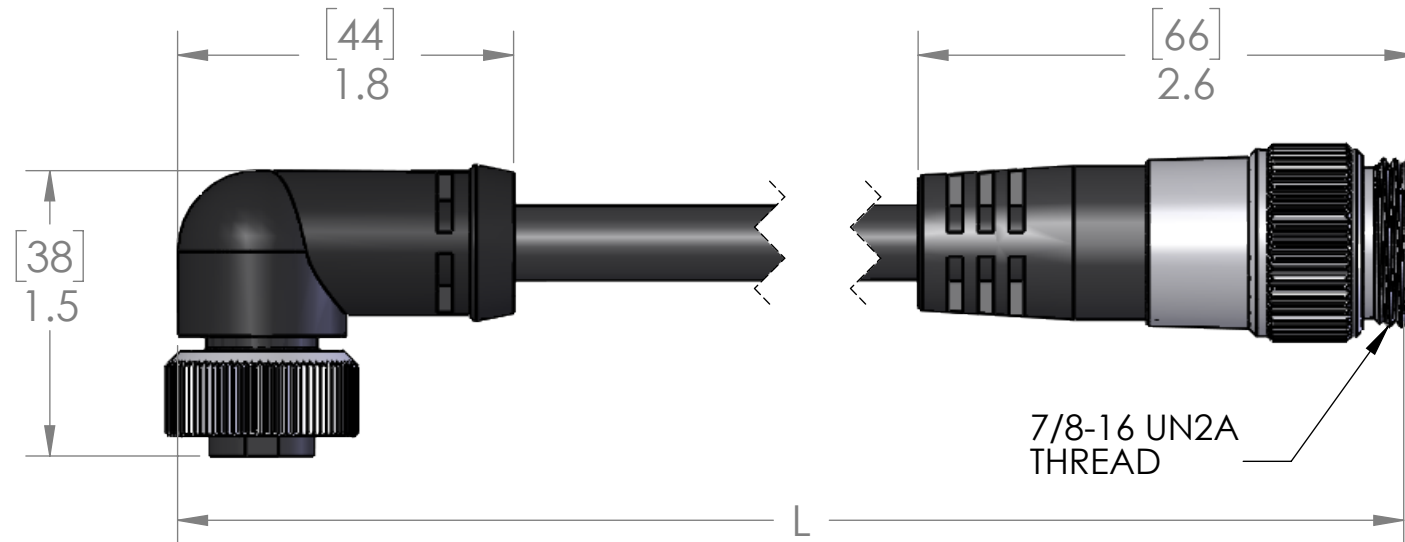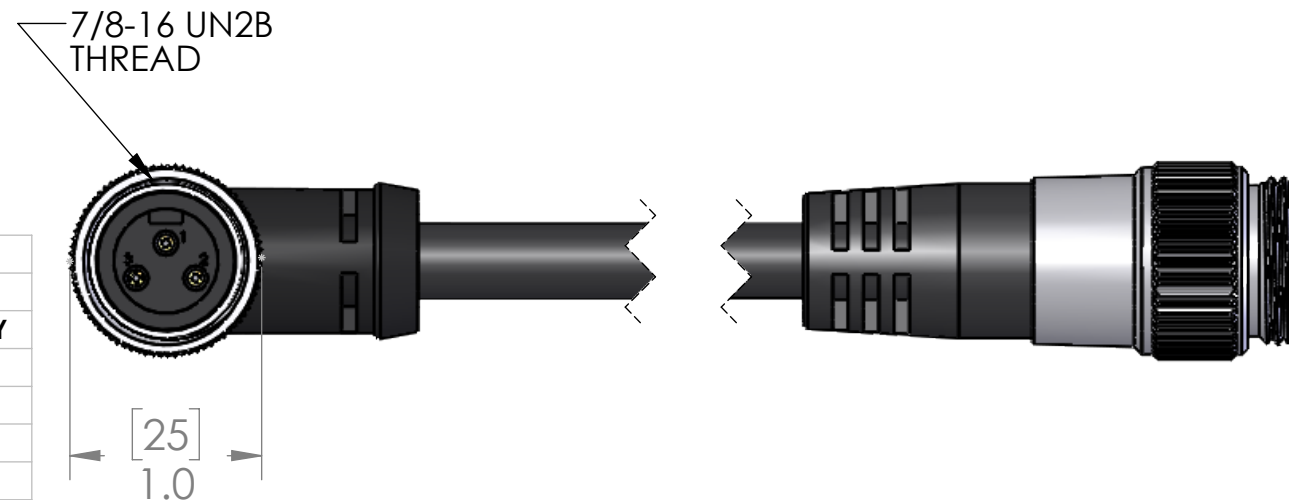

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	600V
AMPS	13A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	JJH
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	11/02/2023
		CHECKED BY	JJH
		CHECK DATE	11/02/2023
MATERIAL		COMMENTS:	
FINISH			
DO NOT SCALE DRAWING			

MENCOM CORPORATION			
TITLE:			
SIZE	DWG. NO.		REV
B	MIN-3MMFRP-ZZ-B		B
SCALE: 1:1		WEIGHT:	SHEET 1 OF 1