REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	8/15/2006	
B	CHANGE COUPLING	6/2/2015	



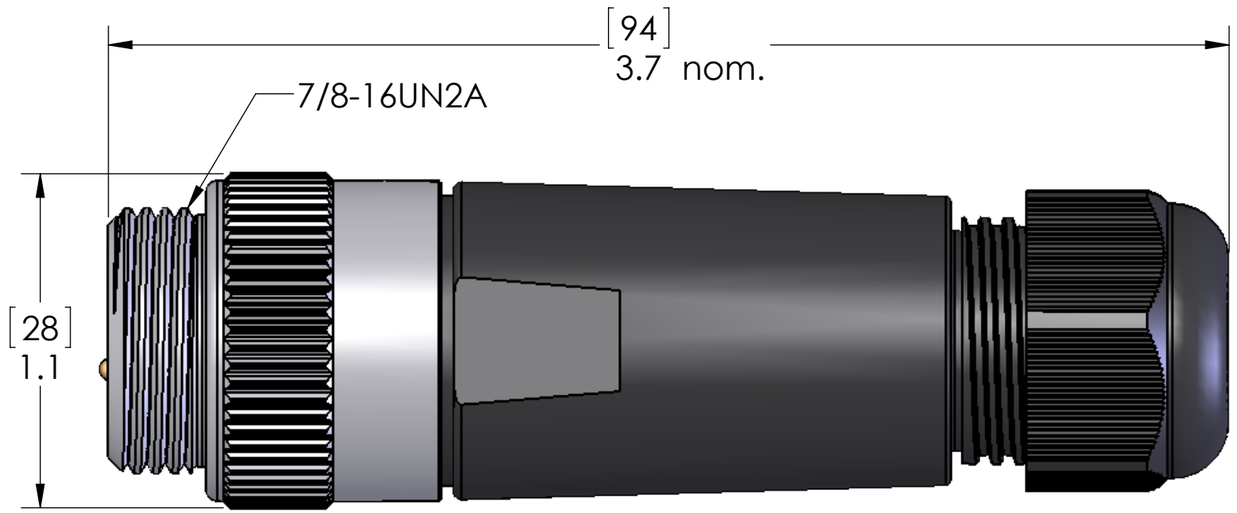

MATERIALS	
BODY:	BLACK POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE SEAL:	NBR
INSERT:	YELLOW PVC
COUPLING:	NICKEL PLATED BRASS
RATINGS	
AMPS:	14AWG - 18A max
	16AWG - 13A max
	18AWG - 10A max
	20-22AWG - 4A max
VOLTS:	600V MAX
SEAL:	IP67
CABLE RANGE:	14AWG - 22AWG
	0.20" - 0.51" (5mm - 13mm) OD
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED

Voltage rating is 600V or the rating of the cable, whichever is less.

Connections made via screw terminals.

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

	NAME
DRAWN	BEM
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
B	MIN-3MPM-FW	B

SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1