

PIN #	COLOR
1	GREEN / YELLOW
2	RED / BLACK
3	RED / WHITE

D

D

C

C


B

B

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1007/1569
AWG:	18 AWG
JACKET:	PVC
VOLTAGE:	300V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	ZINC PLATED STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

A

A

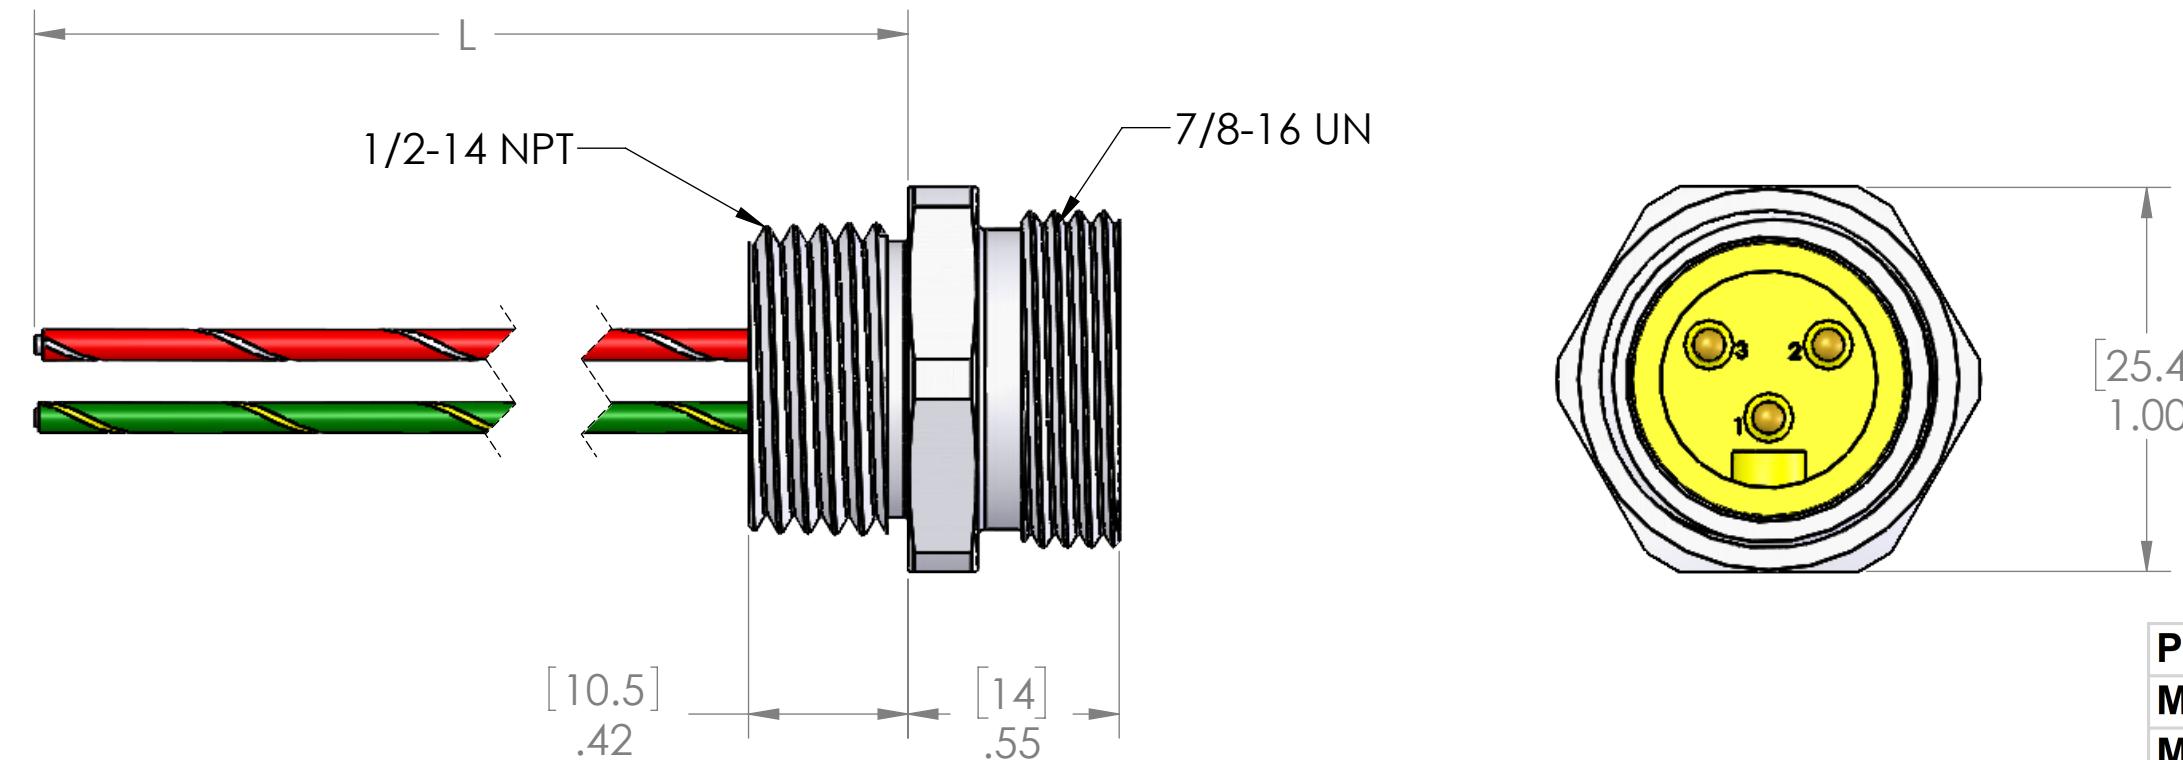

AN O-RING AND LOCKNUT ARE INCLUDED
ON LENGTHS OF 24" [0.6M] AND LONGER.

P/N	L
MIN-3MR-1A-18	12" [0.3m]
MIN-3MR-2A-18	24" [0.6m]
MIN-3MR-3A-18	36" [0.9m]
MIN-3MR-4A-18	48" [1.2m]
MIN-3MR-5A-18	60" [1.5m]
MIN-3MR-6A-18	72" [1.8m]
MIN-3MR-8A-18	96" [2.4m]
MIN-3MR-10A-18	120" [3m]

OTHER LENGTHS ARE AVAILABLE
PLEASE CONSULT FACTORY

MENCOM CORPORATION

SIZE	DWG. NO.	REV
B	MIN-3MR-ZZA-18	B
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS 300V
AMPS 10A
TEMP: 105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MM]
DRAWN BY ADM
DRAWN DATE 09/20/2023
CHECKED BY JJH
CHECK DATE 10/31/2023
COMMENTS:
MATERIAL
FINISH
DO NOT SCALE DRAWING

8

7

6

5

4

3

2

1