


PIN #	COLOR
1	GREEN / YELLOW
2	RED / BLACK
3	RED / WHITE

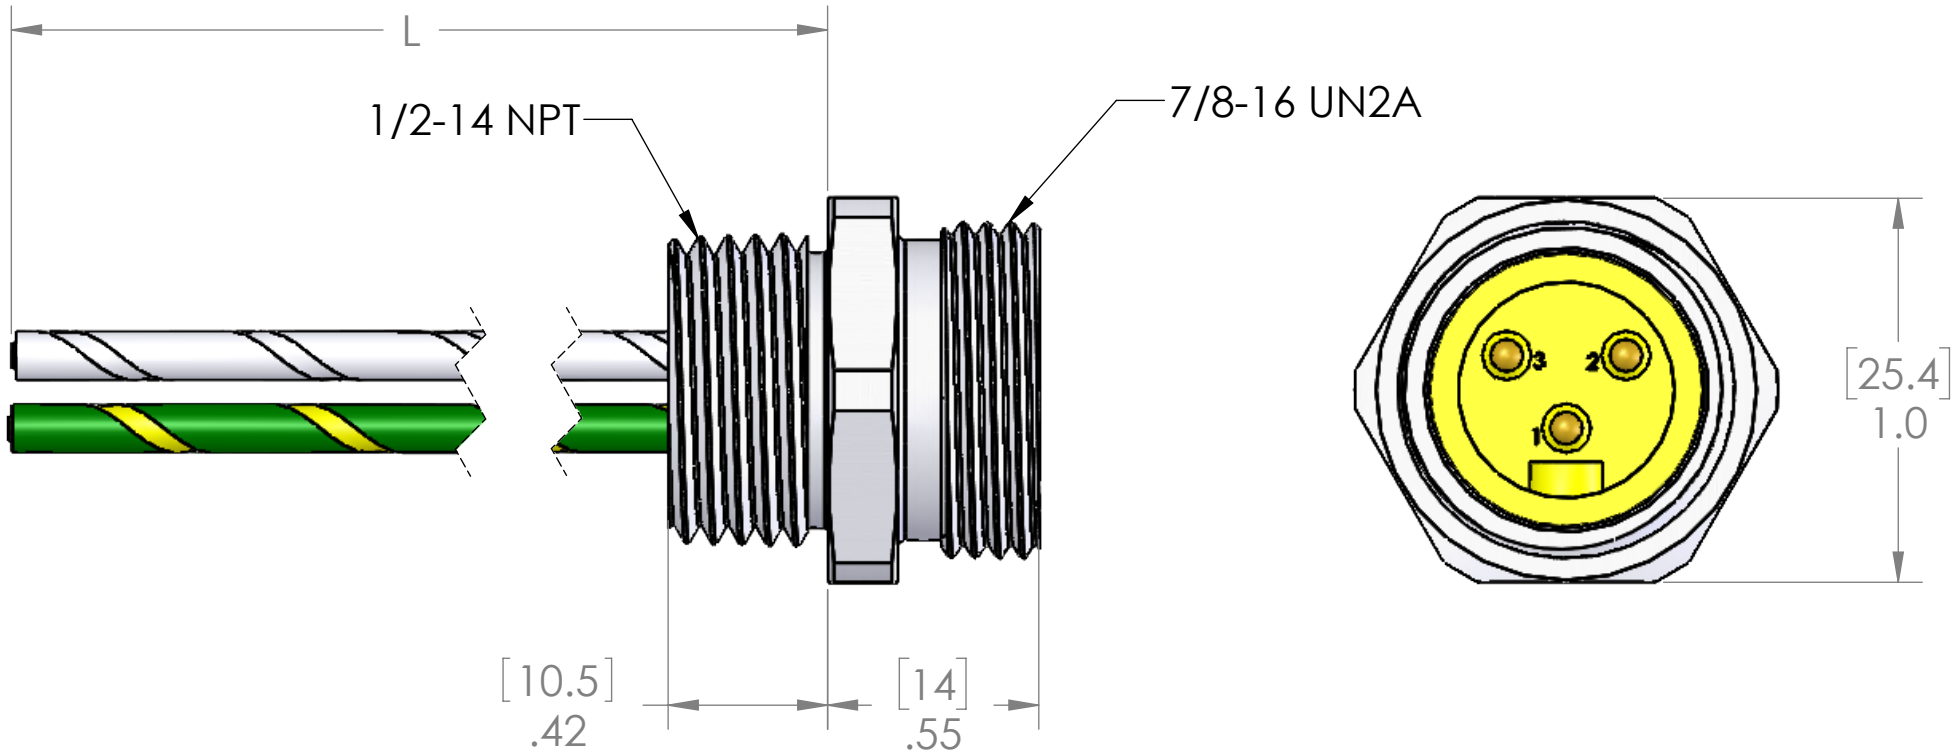

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1015
AWG:	16 AWG
JACKET:	PVC
VOLTAGE:	600V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	ZINC PLATED STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

AN O-RING AND LOCKNUT ARE INCLUDED
ON LENGTHS OF 24" [0.6M] AND LONGER.

P/N	L
MIN-3MR-1A	12" [0.3m]
MIN-3MR-2A	24" [0.6m]
MIN-3MR-3A	36" [0.9m]
MIN-3MR-4A	48" [1.2m]
MIN-3MR-5A	60" [1.5m]
MIN-3MR-6A	72" [1.8m]
MIN-3MR-8A	96" [2.4m]
MIN-3MR-10A	120" [3m]

OTHER LENGTHS ARE AVAILABLE
PLEASE CONSULT FACTORY

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	600V
AMPS	13A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	11/06/2023
		CHECKED BY	JJH
		CHECK DATE	11/06/2023
		COMMENTS:	
MATERIAL			
FINISH			
DO NOT SCALE DRAWING			

MENCOM CORPORATION		
TITLE: 3 PL ML MIN RECP		
SIZE B	DWG. NO. MIN-3MR-ZZA	REV B
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1