


REVISIONS


REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	5/10/2016	BEM

D

D

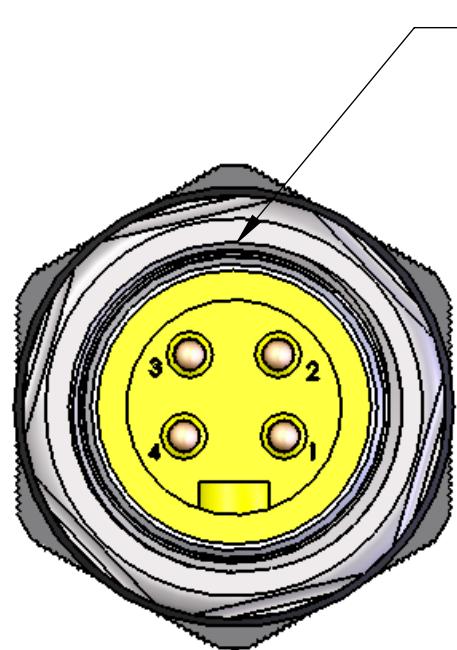

7/8-16 UN2A

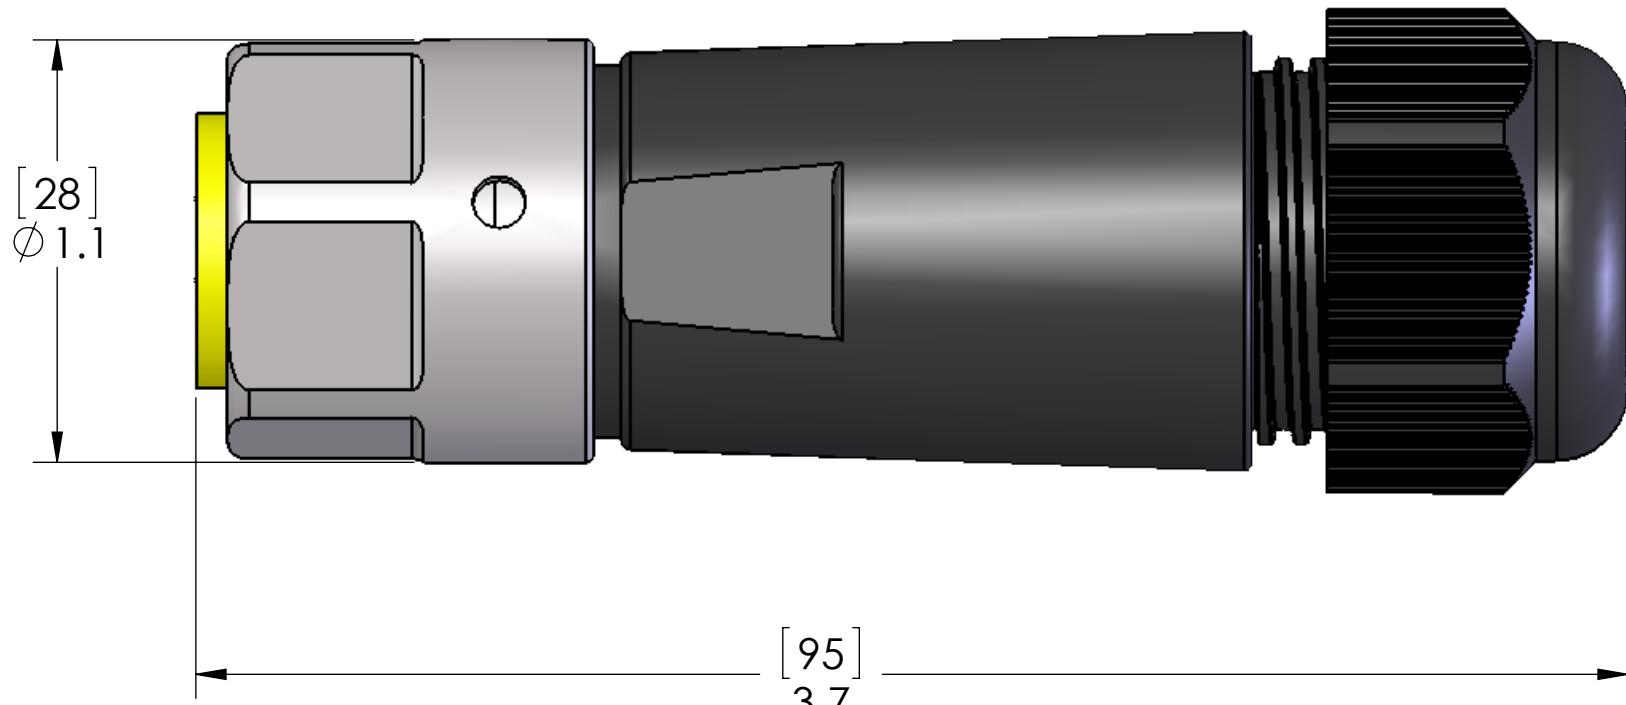

MATERIALS

BODY:	BLACK POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE SEAL:	NBR
INSERT:	YELLOW PVC
COUPLING:	STAINLESS STEEL

RATINGS

AMPS:	14AWG - 15A max
	16AWG - 10A max
	18AWG - 8A max
	20-22AWG - 4A max

VOLTS:	600V MAX
SEAL:	IP67
CABLE RANGE:	14AWG - 22AWG
	0.31" - 0.67" (8mm - 17mm) OD

APPROVALS	(14-20AWG ONLY)
-----------	-----------------

US:	UL LISTED
-----	-----------

CANADA:	C-UL LISTED
---------	-------------

Voltage rating is 600V or the rating of the cable, whichever is less.

Connections made via screw terminal

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

SPECIFICATIONS	DO NOT SCALE DRAWING
----------------	----------------------

UNLESS OTHERWISE SPECIFIED:	NAME
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN JJH
	CHECKED
	ENG APPR.
	MFG APPR.
	Q.A.
	COMMENTS:
MATERIAL	
FINISH	

MENCOM CORPORATION

TITLE:

4 PL MIN FW, SS

SIZE DWG. NO.

B MIN-4MP-FWX-SS

REV A

SCALE: 2:1 WEIGHT:

SHEET 1 OF 1