
REVISIONS REV. DESCRIPTION DATE APPROVED REDRAWN IN SW 6/15/2006

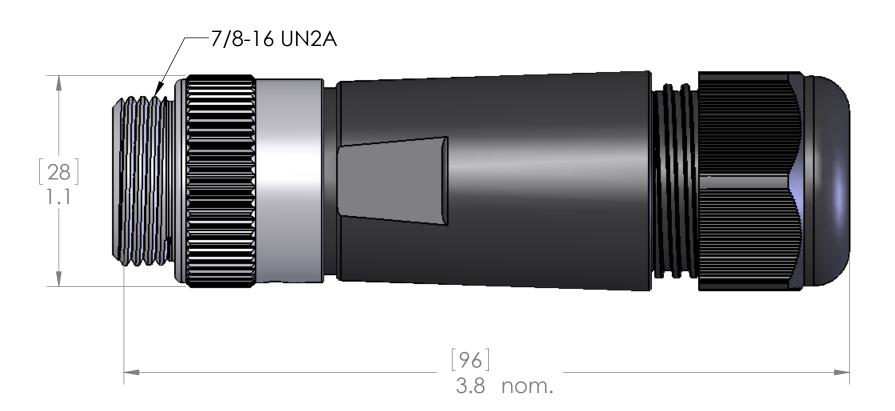

MATERIALS					
BODY:	BLACK POLYAMIDE				
CONTACTS:	GOLD PLATED COPPER ALLOY				
CABLE SEAL:	NBR				
INSERT:	YELLOW PVC				
COUPLING:	NICKEL PLATED BRASS				
RATINGS					
KATINGS					
AMPS:	14AWG - 15A max				
	16AWG - 10A max				
	18AWG - 8A max				
	20-22AWG - 4A max				
VOLTS:	600V MAX				
SEAL:	IP67				
CABLE RANGE:	14AWG - 22AWG				
	0.31" - 0.67" (8mm - 17mm) OD				
APPROVALS					
AFFRUVALS					
US:	UL LISTED				
CANADA:	C-UL LISTED				

Voltage rating is 600V or the rating of the cable, whichever is less.

Connections made via screw terminal

	PROPRIETARY AND CONFIDENTIAL
	INFORMATION CONTAINED IN THIS
MEN	ICOM CORPORATION. ANY
	RODUCTION IN PART OR AS A WHOLE HOUT THE WRITTEN PERMISSION OF
	NCOM CORPORATION IS
IIKO	THUHLU.

UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPOR			NΙ
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM	/V\LI`	ACOM COM ON	AIIO	IN
	CHECKED		TITLE:			
	ENG APPR.					
	MFG APPR.					
	Q.A.					
	COMMENTS:					
MATERIAL			SIZE DWG			REV
FINISH			B	MIN-4MPM-FWX	(А
DO NOT SCALE DRAWING			SCALE: 2:1	WEIGHT:	SHEET	1 OF

TITLE	:		
			1
	DWG. NO.	REV	
В	MIN-4MPM-FWX	Α	
		, , , ,	

SHEET 1 OF 1