| PIN # | COLOR |
|---|---|
| | |
| 1 | BLACK |
| 2 | WHITE |
| 3 | RED |
| 4 | GREEN / YELLOW |

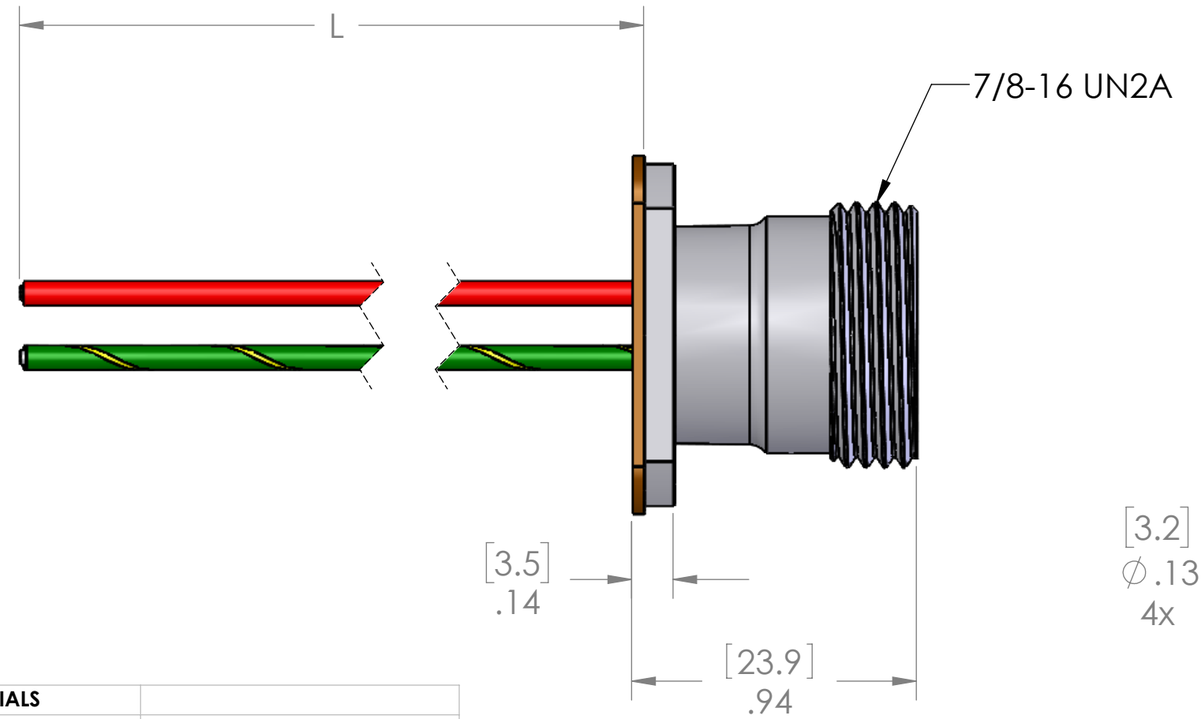


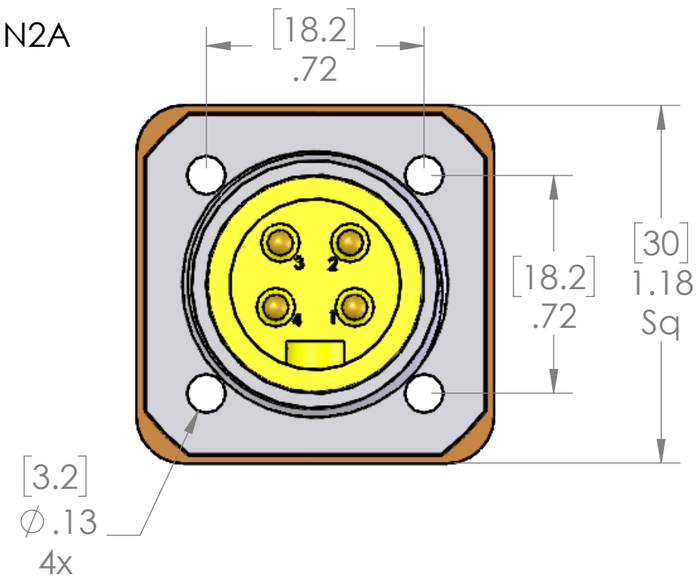


| P/N | L |
|---|---|
| MIN-4MR-18-1-PM | 12" [0.3m] |
| MIN-4MR-18-2-PM | 24" [0.6m] |
| MIN-4MR-18-3-PM | 36" [0.9m] |
| MIN-4MR-18-4-PM | 48" [1.2m] |
| MIN-4MR-18-5-PM | 60" [1.5m] |
| MIN-4MR-18-6-PM | 72" [1.8m] |
| MIN-4MR-18-10-PM | 120" [3m] |

OTHER LENGTHS ARE AVAILABLE
PLEASE CONSULT FACTORY

| MATERIALS | |
|---|---|
| SHELL: | CLEAR ANODIZED ALUMINUM |
| CONTACTS: | GOLD PLATED COPPER ALLOY |
| WIRES: | |
| STYLE: | UL 1007/1569 |
| AWG: | 18 AWG |
| JACKET: | PVC |
| VOLTAGE: | 300V |
| INSERT: | YELLOW PVC |
| GASKET: | NBR |
| NUT: | N/A |
| | |
| APPROVALS | |
| US: | UL LISTED |
| CANADA: | C-UL LISTED |
| ROHS: | YES |
| CE & UKCA: | YES |
| | |
| RATINGS | |
| PROTECTION CLASS: | UL TYPE 4 & 12, IEC IP69 |

**PROPRIETARY AND CONFIDENTIAL**
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

| | |
|---|---|
| VOLTS | 300V |
| AMPS | 8A |
| TEMP: | 105°C |

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

| | |
|---|---|
| DRAWN BY | ADM |
| DRAWN DATE | 11/10/2023 |
| CHECKED BY | JJH |
| CHECK DATE | 11/10/2023 |

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE B | DWG. NO. MIN-4MR-ZZ-18-PM | REV B

SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1