PIN #	COLOR
1	BLACK
2	WHITE
3	RED
4	GREEN / YELLOW

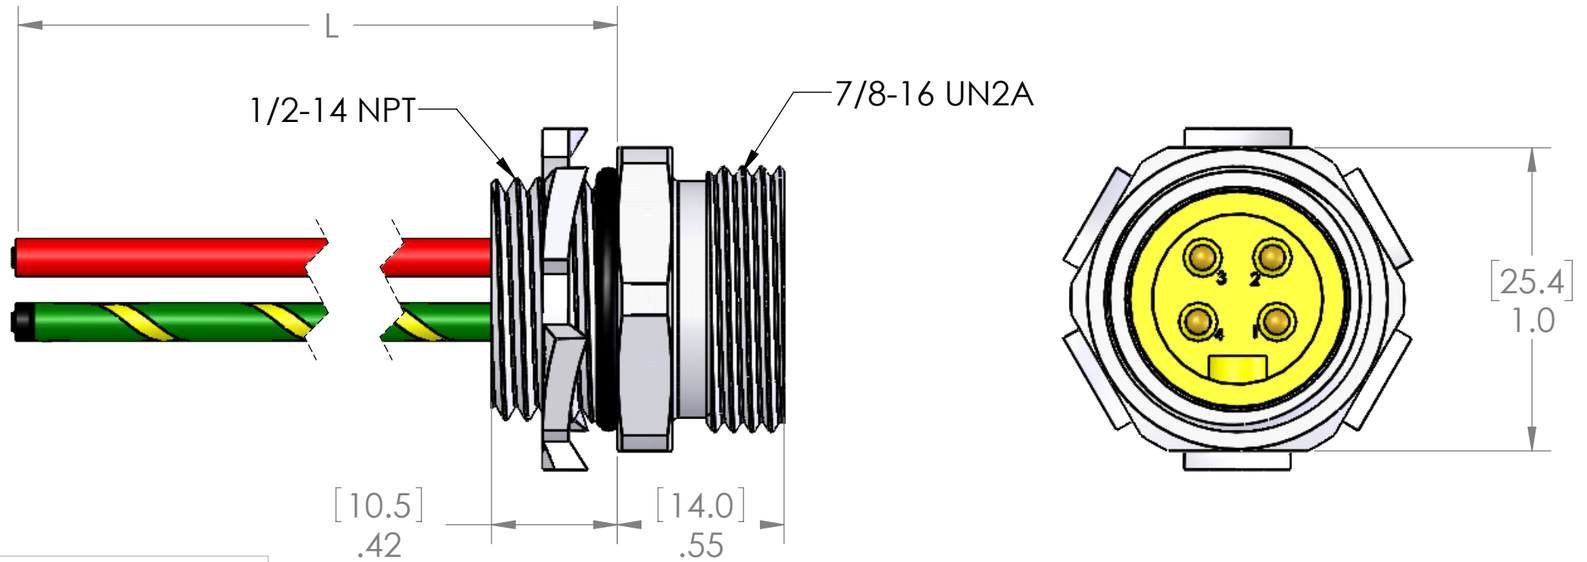

MATERIALS	
SHELL:	ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL1015
AWG:	16 AWG
JACKET:	PVC
VOLTAGE:	600V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	ZINC PLATED STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

TABLE A	
P/N	L
MIN-4MR-0.25-G	3" [0.08M]
MIN-4MR-0.5-G	6" [0.15M]
MIN-4MR-1-G	12" [0.3M]

OTHER LENGTHS ARE AVAILABLE
PLEASE CONSULT FACTORY

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	10A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	JJH
DRAWN DATE	11/13/2023
CHECKED BY	JJH
CHECK DATE	11/13/2023

COMMENTS:

MENCOM CORPORATION

TITLE:
4 PL MIN ML RECP

SIZE	DWG. NO.	REV
B	MIN-4MR-ZZ-G	B

SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1