





REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	8/15/2006	

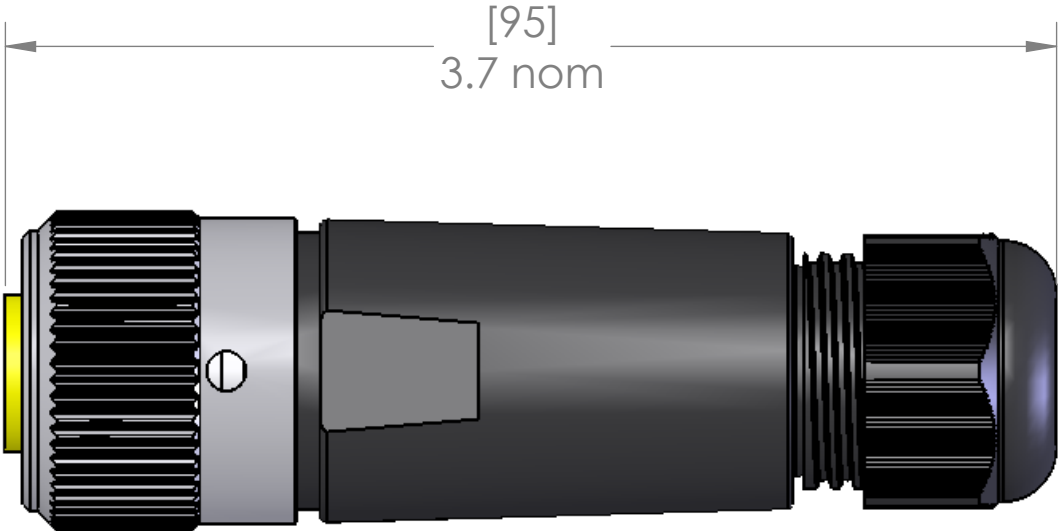

INTERNAL MARKINGS
AS SHOWN



MATERIALS	
BODY:	BLACK POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE SEAL:	NBR
INSERT:	YELLOW PVC
COUPLING:	BLACK ANODIZED ALUMINUM
RATINGS	
AMPS:	14AWG - 12A max 16AWG - 8A max 18AWG - 5.5A max 20-22AWG - 4A max
VOLTS:	600V MAX
SEAL:	IP67
CABLE RANGE:	14AWG - 22AWG 0.20" - 0.51" (5mm - 13mm) OD

Maximum voltage is cable dependent.
Voltage rating is 600V or the voltage
rating on the cable, whichever is less.

Connections made via
screw terminal

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:	NAME	MENCOM CORPORATION			
		DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM	TITLE:		
			CHECKED				
			ENG APPR.				
			MFG APPR.				
			Q.A.				
		MATERIAL	COMMENTS:		SIZE	DWG. NO.	REV
		FINISH			B	MIN-5FP-FW-DN	A
		DO NOT SCALE DRAWING			SCALE: 3:2	WEIGHT:	SHEET 1 OF 1