PIN #	COLOR
1	RED w/WHITE
2	RED
3	GREEN / YELLOW
4	RED w/YELLOW
5	RED w/BLACK

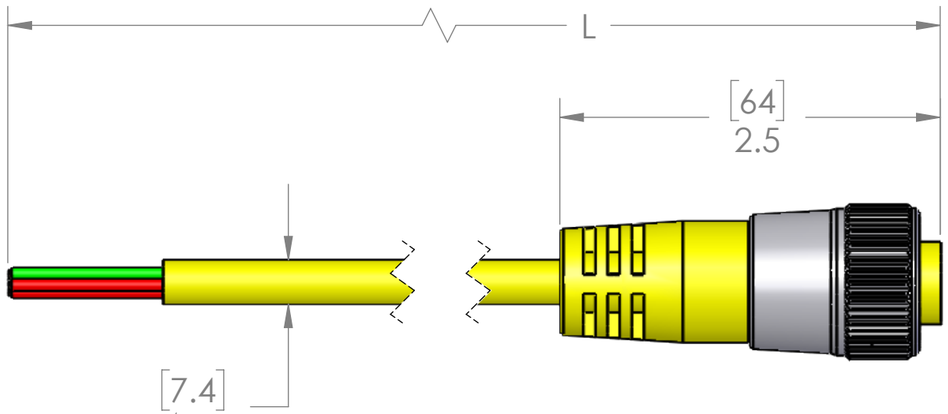

P/N	L	STD?
MIN-5FPX-3A	36" [0.9]	YES
MIN-5FPX-6A	72" [1.8]	YES
MIN-5FPX-12A	144" [3.6]	YES
MIN-5FPX-20A	240" [6.1]	YES
MIN-5FPX-30A	360" [9.2]	YES
MIN-5FPX-40A	480" [12.2]	NO
MIN-5FPX-50A	600" [15.2]	NO
MIN-5FPX-60A	720" [18.3]	NO
MIN-5FPX-100A	1200" [30.5]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS	
BODY:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	18 AWG
JACKET:	YELLOW PVC
VOLTAGE:	300V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	YELLOW PVC
O-RING:	N/A
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	5.5A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	11/14/2023
CHECKED BY	JJH
CHECK DATE	11/16/2023

COMMENTS:

MENCOM CORPORATION

TITLE:

5 PL MIN AUTO CC PLUG

SIZE	DWG. NO.	REV
B	MIN-5FPX-ZZA	C

SCALE: 1:2 | WEIGHT: | SHEET 1 OF 1