


PIN #	COLOR
1	WHITE
2	RED
3	GREEN/YELLOW
4	ORANGE
5	BLACK

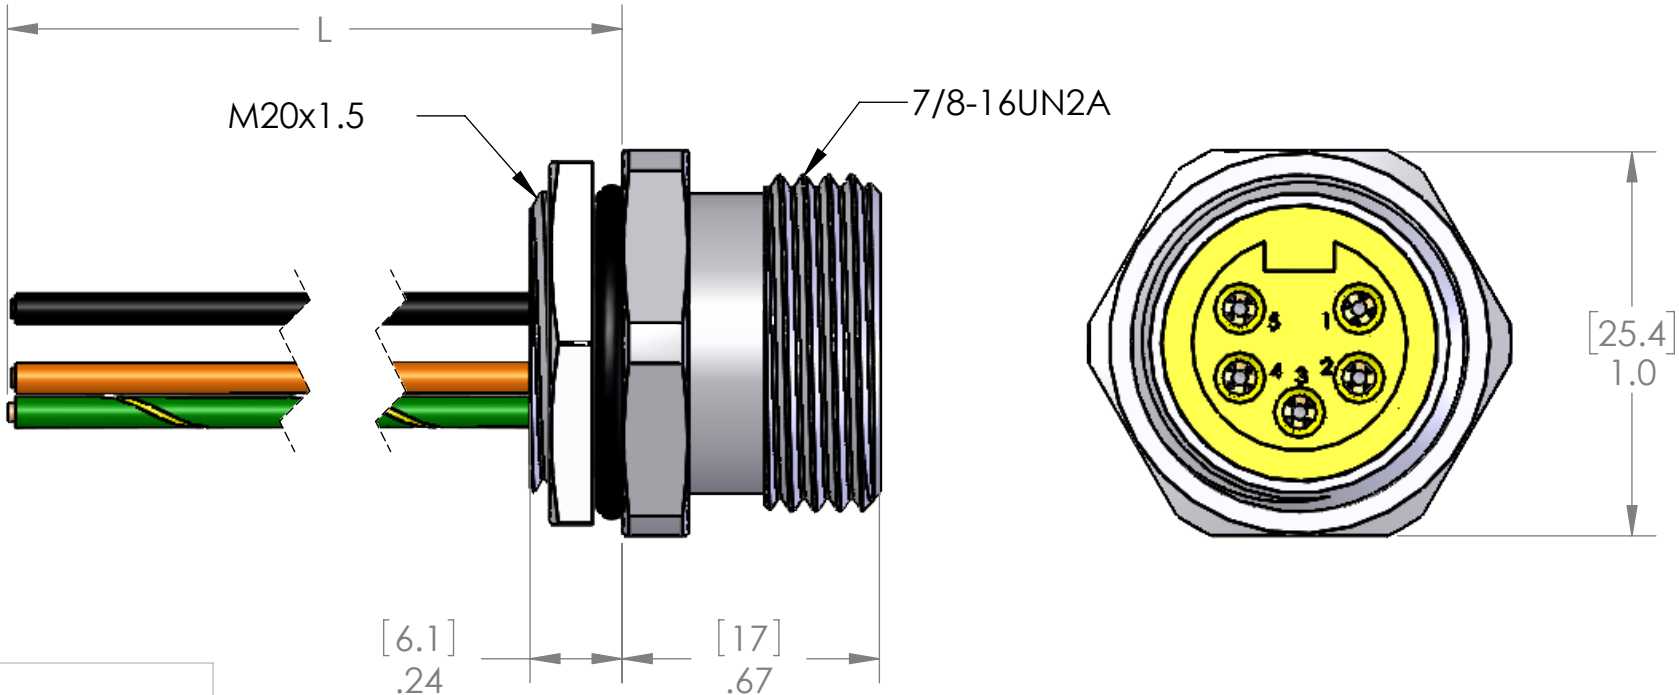

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1007/1569
AWG:	18 AWG
JACKET:	PVC
VOLTAGE:	300V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	NICKEL PLATED BRASS
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

TABLE A	
P/N	L
MIN-5FR-1-18-M20	12" [0.3m]
MIN-5FR-2-18-M20	24" [0.6m]
MIN-5FR-3-18-M20	36" [0.9m]
MIN-5FR-4-18-M20	48" [1.2m]
MIN-5FR-6-18-M20	72" [1.8m]
MIN-5FR-10-18-M20	120" [3.1m]

OTHER LENGTHS AVAILABLE,
PLEASE CONSULT FACTORY

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	5.5A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	11/17/2023
	CHECKED BY	JJH
	CHECK DATE	11/28/2023
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
5 PL MIN FEM RECP		
SIZE	DWG. NO.	REV
B	MIN-5FR-ZZ-18-M20	B
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1