PIN #	COLOR
1	WHITE
2	RED
3	GREEN/YELLOW
4	ORANGE
5	BLACK

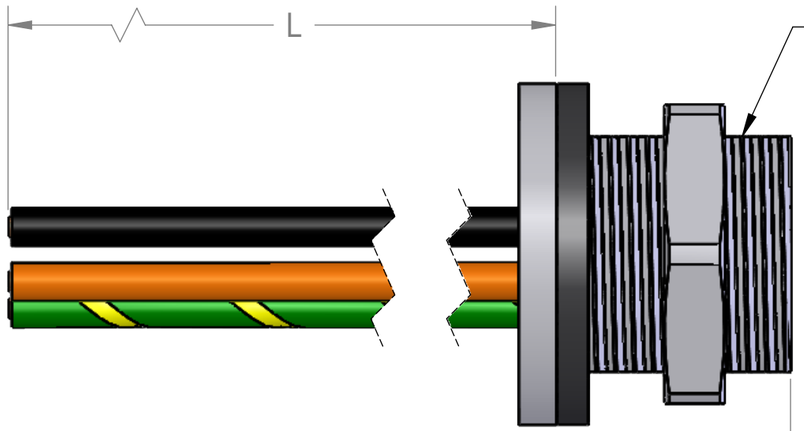

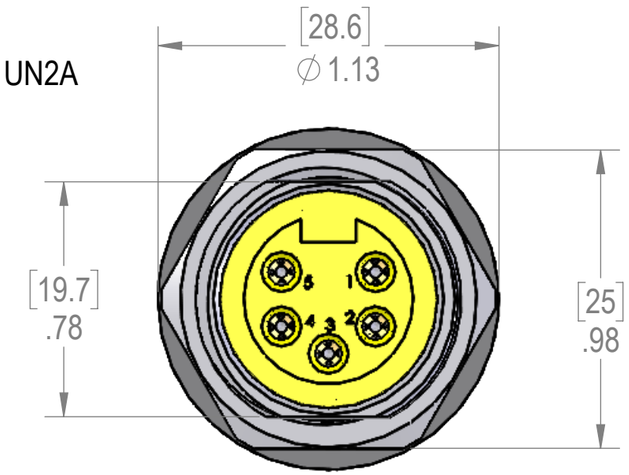

RECOMMENDED
CUT-OUT

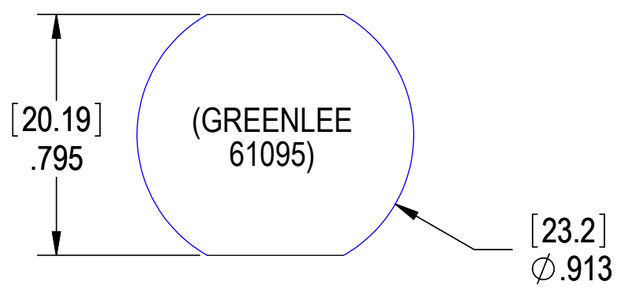

P/N	L
MIN-5FR-1-BM	12" [0.3m]
MIN-5FR-2-BM	24" [0.6m]
MIN-5FR-3-BM	36" [0.9m]
MIN-5FR-4-BM	48" [1.2m]
MIN-5FR-6-BM	72" [1.8m]
MIN-5FR-10-BM	120" [3.1m]
MIN-5FR-15-BM	180" [4.6m]
MIN-5FR-20-BM	240" [6.1m]

OTHER LENGTHS ARE AVAILABLE,
PLEASE CONSULT FACTORY.

MATERIALS	
SHELL:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1015
AWG:	16 AWG
JACKET:	PVC
VOLTAGE:	600V
INSERT:	YELLOW PVC
GASKET:	NBR
NUT:	NICKEL PLATED BRASS
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	8A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	JJH
DRAWN DATE	11/20/2023
CHECKED BY	JJH
CHECK DATE	11/28/2023

COMMENTS:

MENCOM CORPORATION

TITLE:
5 PL FEM MIN RECP

SIZE	DWG. NO.	REV
B	MIN-5FR-ZZ-BM	C

SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1