


PIN #	COLOR
1	GRAY
2	RED
3	BLACK
4	WHITE
5	BLUE

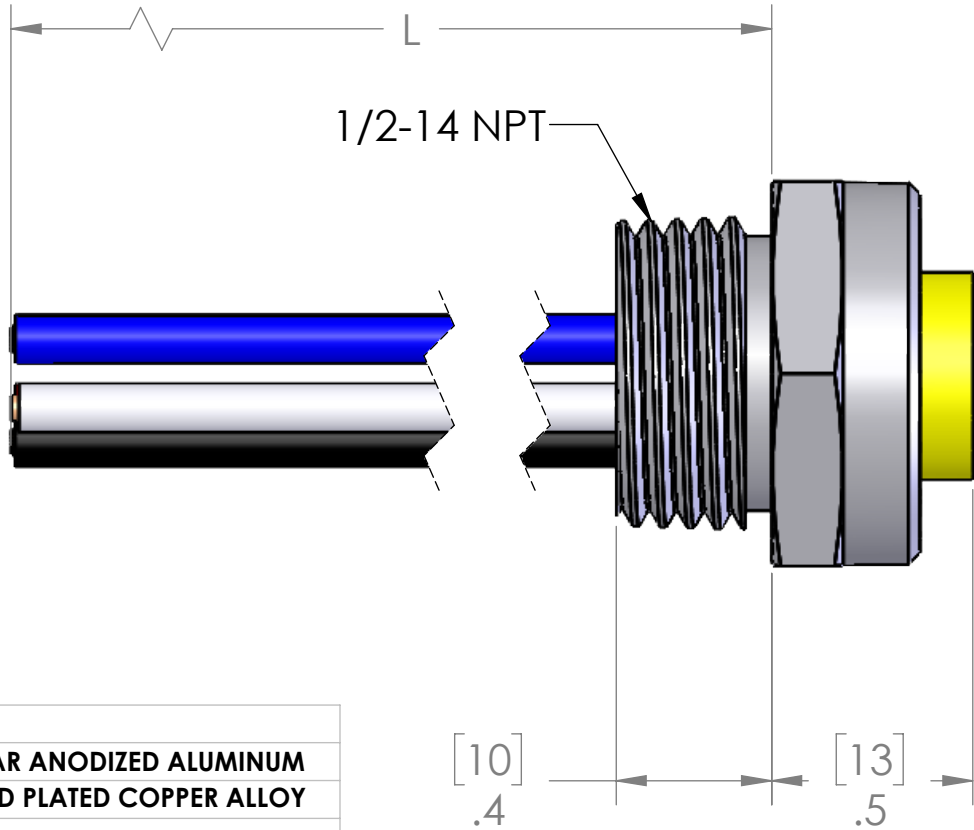

AN O-RING AND LOCKNUT ARE INCLUDED
ON LENGTHS OF 24" [0.6M] AND LONGER.

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1015
AWG:	16 AWG
JACKET:	PVC
VOLTAGE:	600V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	ZINC PLATED STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	600V
AMPS	8A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	11/21/2023
		CHECKED BY	JJH
		CHECK DATE	11/28/2023
MATERIAL	COMMENTS:		
FINISH			
DO NOT SCALE DRAWING			

TABLE A	
P/N	L
MIN-5FR-.5-DN	6" [.15M]
MIN-5FR-1-DN	12" [.3M]
MIN-5FR-2-DN	24" [.61M]
MIN-5FR-3-DN	36" [0.9M]
MIN-5FR-4-DN	48" [1.2M]
MIN-5FR-6-DN	72" [1.8M]
MIN-5FR-10-DN	120" [3M]

OTHER LENGTHS ARE AVAILABLE
PLEASE CONSULT FACTORY

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MIN-5FR-ZZ-DN	B
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1