


PIN #	COLOR
1	WHITE
2	RED
3	GREEN / YELLOW
4	ORANGE
5	BLACK

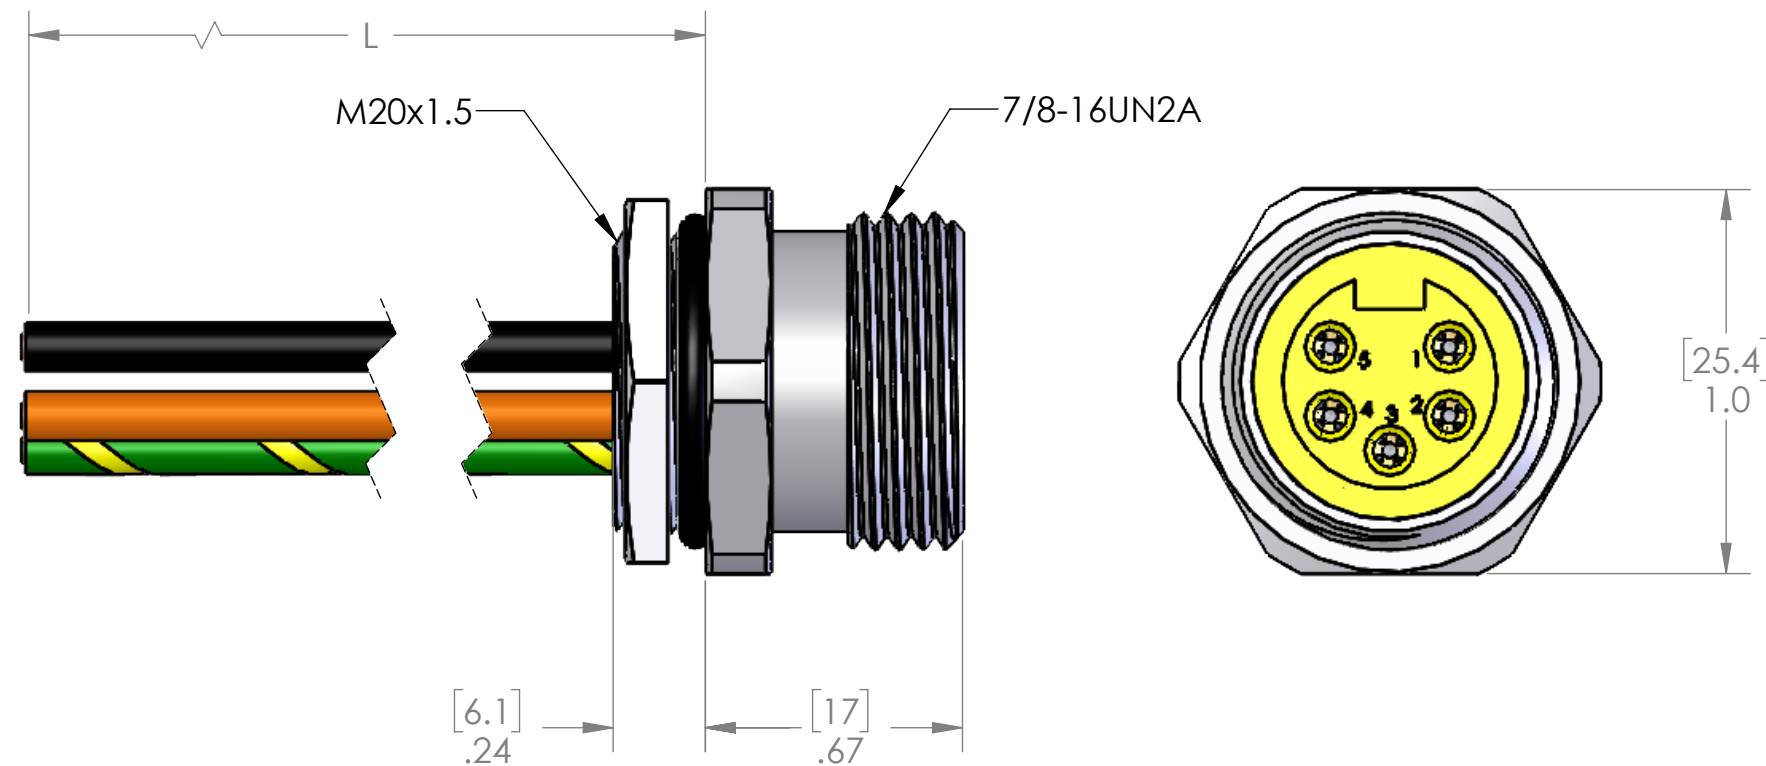

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1015
AWG:	16/5
JACKET:	PVC
VOLTAGE:	600V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	NICKEL PLATED BRASS
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

TABLE A	
P/N	L
MIN-5FR-0.5-M20	6" [0.15M]
MIN-5FR-1-M20	12" [0.3M]
MIN-5FR-2-M20	24" [0.6M]
MIN-5FR-3-M20	36" [0.91M]
MIN-5FR-4-M20	48" [1.2M]
MIN-5FR-5-M20	60" [1.5M]
MIN-5FR-6-M20	72" [1.8M]
MIN-5FR-10-M20	120" [3M]

OTHER LENGTHS AVAILABLE
PLEASE CONSULT FACTORY

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	APR	MENCOM CORPORATION					
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	11/21/2023				TITLE:		
		CHECKED BY	JJH						
		CHECK DATE	11/28/2023						
				SIZE B					
MATERIAL		COMMENTS:							
FINISH									
DO NOT SCALE DRAWING									
				DWG. NO. MIN-5FR-ZZ-M20		REV B			
				SCALE: 2:1		WEIGHT:			
						SHEET 1 OF 1			

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	600V
AMPS	8A
TEMP:	105°C