


PIN #	COLOR
1	RED w/WHITE
2	RED
3	GREEN / YELLOW
4	RED w/YELLOW
5	RED w/BLACK

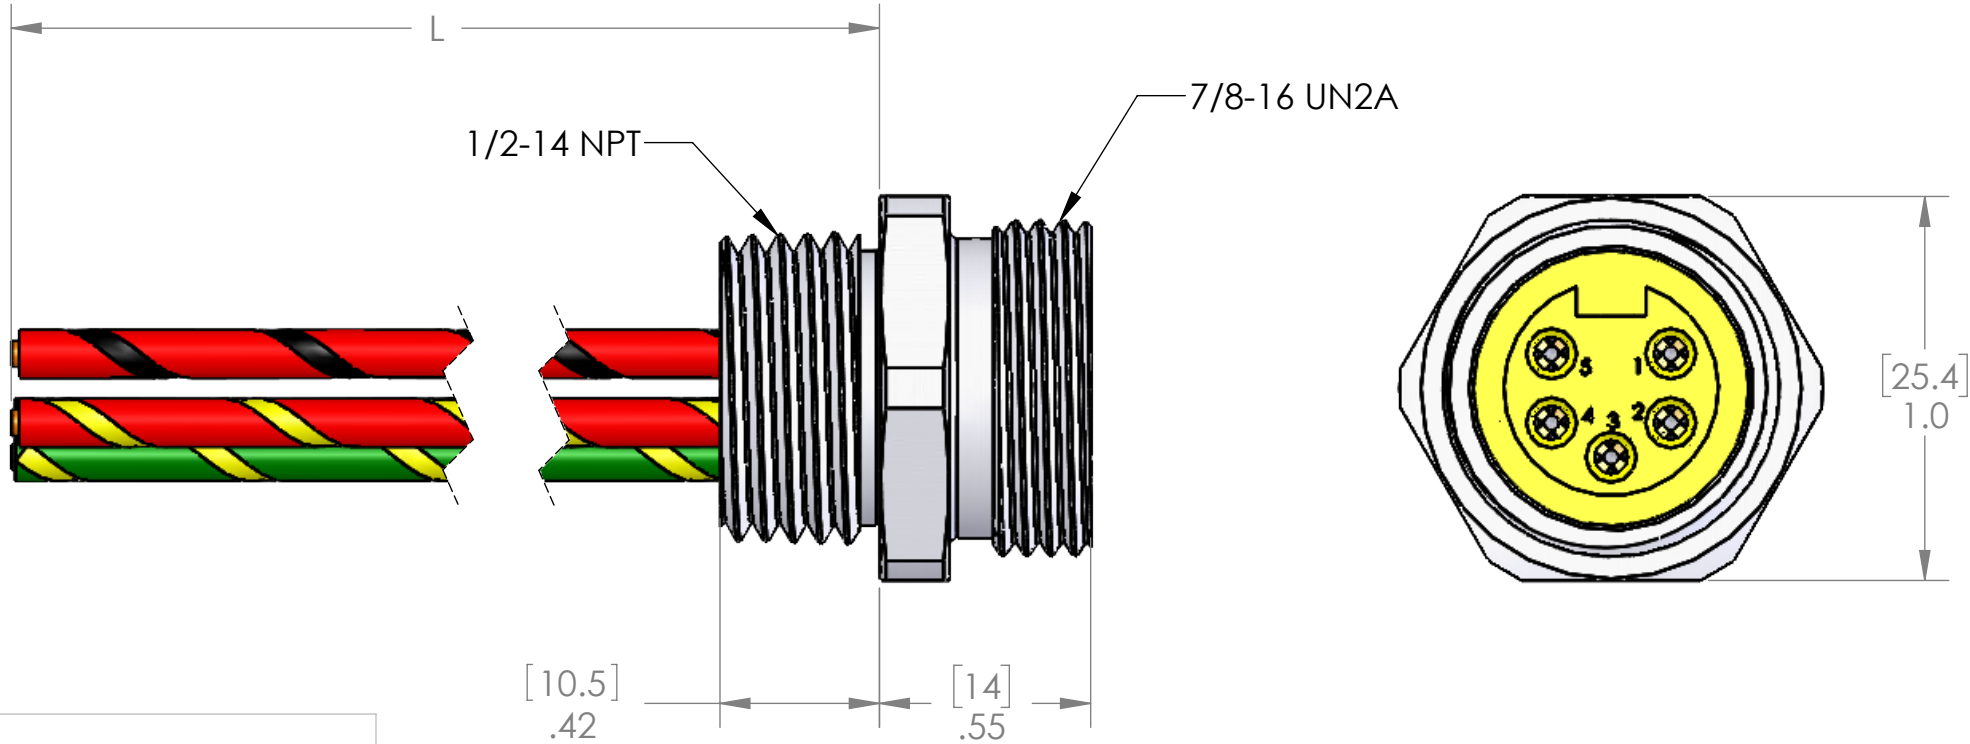

AN O-RING AND LOCKNUT ARE INCLUDED  
ON LENGTHS OF 24" [0.6M] AND LONGER.

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1015
AWG:	16 AWG
JACKET:	PVC
VOLTAGE:	600V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	ZINC PLATED STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

P/N	L
MIN-5FR-1A	12" [0.3m]
MIN-5FR-2A	24" 0.6m]
MIN-5FR-3A	36" [0.9m]
MIN-5FR-4A	48" [1.2m]
MIN-5FR-5A	60" [1.5m]
MIN-5FR-6A	72" [1.8m]
MIN-5FR-10A	120" [3m]

OTHER LENGTHS ARE AVAILABLE  
PLEASE CONSULT FACTORY

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

VOLTS	600V
AMPS	8A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	11/20/2023
		CHECKED BY	JJH
		CHECK DATE	11/28/2023
		COMMENTS:	
MATERIAL			
FINISH			
DO NOT SCALE DRAWING			

MENCOM CORPORATION		
TITLE:		
5 PL FEM MIN RECP		
SIZE	DWG. NO.	REV
B	MIN-5FR-ZZA	B
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1