



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	1/23/2014	BEM

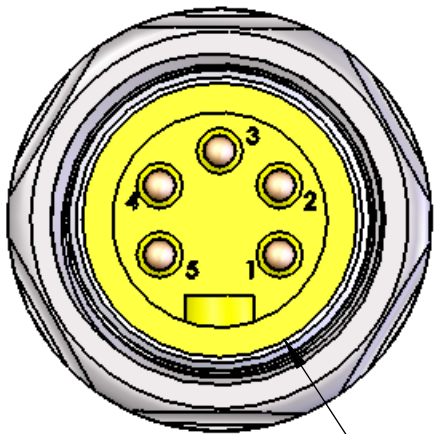

7/8-16UN2B
FEMALE THREAD

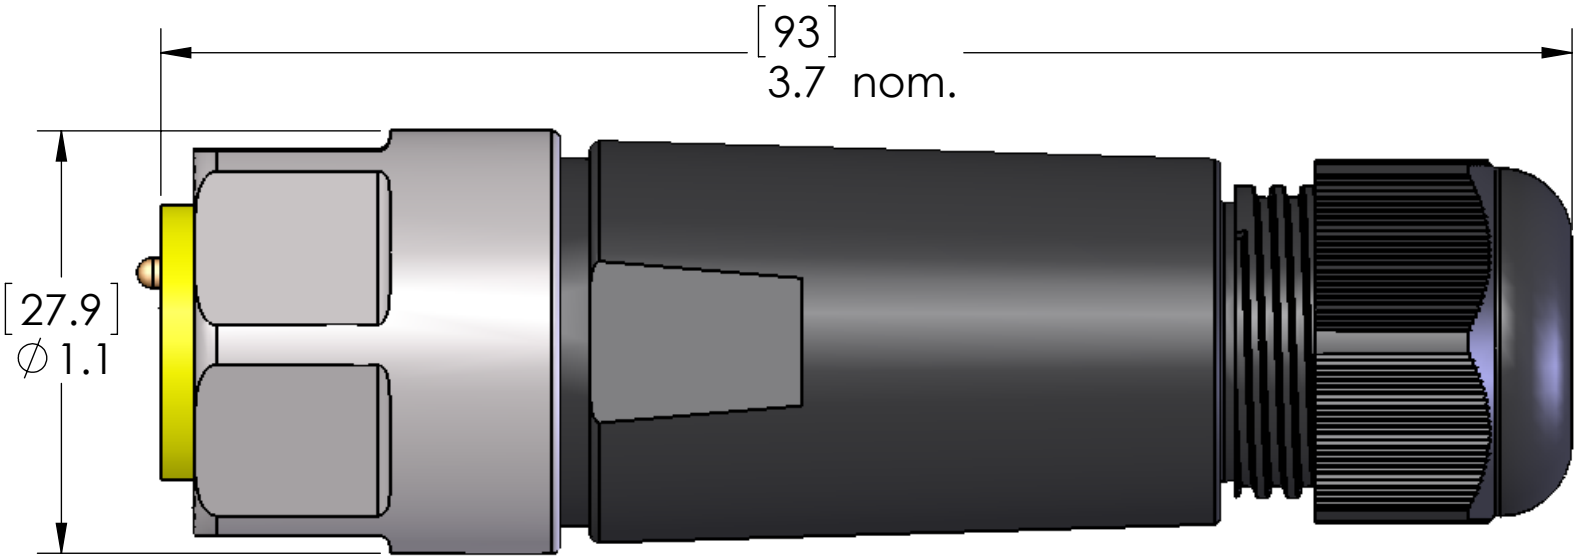

MATERIALS	
BODY:	BLACK POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE SEAL:	NBR
INSERT:	YELLOW PVC
COUPLING:	STAINLESS STEEL
RATINGS	
AMPS:	14AWG - 12A max 16AWG - 8A max 18AWG - 5.5A max 20-22AWG - 4A max
VOLTS:	600V MAX
SEAL:	IP67
CABLE RANGE:	14AWG - 22AWG 0.20" - 0.51" (5mm - 13mm) OD
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED

Voltage rating is 600V or the rating of the cable, whichever is less.

Connections made via screw terminal

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION	
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	JJH	TITLE:	
	CHECKED		5 PL MIN MAL FW MAL CPLG SS	
	ENG APPR.			
	MFG APPR.			
MATERIAL	Q.A.		SIZE	REV
	COMMENTS:		B	A
FINISH			DWG. NO.	
DO NOT SCALE DRAWING		SCALE: 2:1	MIN-5MP-FW-SS	
		WEIGHT:	SHEET 1 OF 1	