
REVISIONS DESCRIPTION APPROVED REV. DATE REDRAWN IN SW 11/13/2006 Α

-7/8-16 UN2B FEMALE THREAD

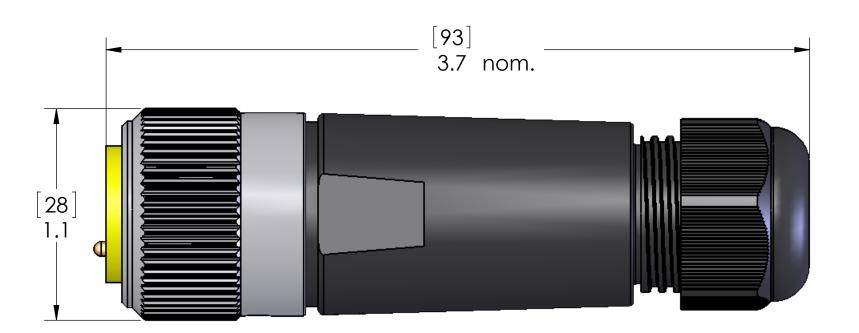

MATERIALS							
BODY:	BLACK POLYAMIDE						
CONTACTS:	GOLD PLATED COPPER ALLOY						
	NBR						
CABLE SEAL:							
INSERT:	YELLOW PVC						
COUPLING:	NICKEL PLATED BRASS						
RATINGS							
AMPS:	14AWG - 12A max						
	16AWG - 8A max						
	18AWG - 5.5A max						
	20-22AWG - 4A max						
VOLTS:	600V MAX						
SEAL:	IP67						
<b>CABLE RANGE:</b>	14AWG - 22AWG						
	0.20" - 0.51" (5mm - 13mm) OD						
APPROVALS	(14-20AWG ONLY)						
US:	UL LISTED						
CANADA:	C-UL LISTED						

Voltage rating is 600V or the rating of the cable, whichever is less.

Connections made via screw terminal

	UNLESS OTHERWISE SPECIFIED:		NAME	<u>-</u>					
DIMENSIONS	DIMENSIONS ARE IN INCHES	DRAWN	BEM	MENC	MENCOM CORPORATION				
	AND [MM]	CHECKED		TITLE:	TITLE:				
DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY		ENG APPR.							
		MFG APPR.							
		Q.A.							
	MATERIAL	COMMENTS:		SIZE DWG	MIN-5MP-FW			REV •	
	FINISH			B				A	
	DO NOT SCALE DRAWING			SCALE: 2:1	WEIGHT:		SHEET	1 OF 1	