
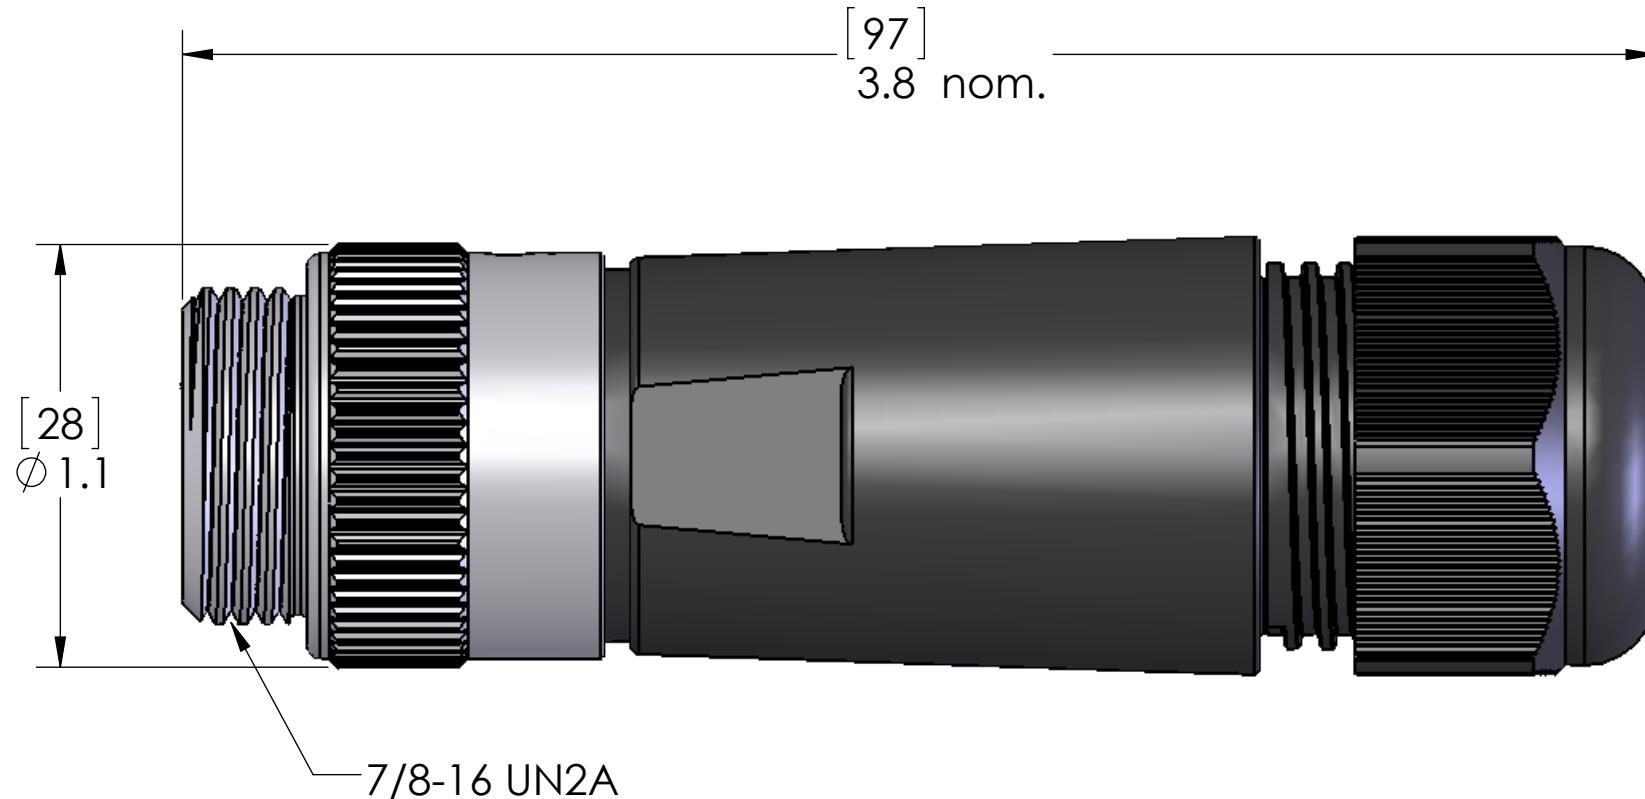


REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	8/15/2006	

D

D

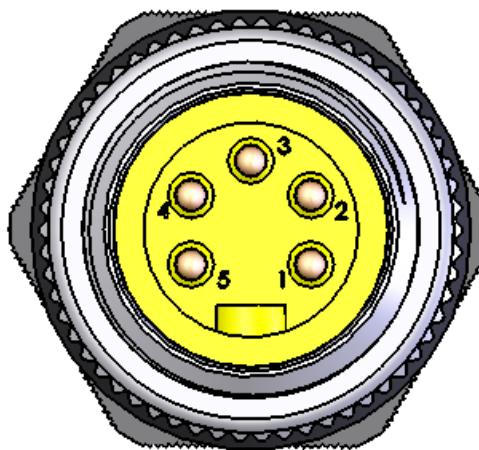

MATERIALS

BODY:	BLACK POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE SEAL:	NBR
INSERT:	YELLOW PVC
COUPLING:	NICKEL PLATED BRASS

RATINGS

AMPS:	14AWG - 12A max 16AWG - 8A max 18AWG - 5.5A max 20-22AWG - 4A max
-------	--

VOLTS:	600V MAX
SEAL:	IP67
CABLE RANGE:	14AWG - 22AWG 0.31" - 0.67" (8mm - 17mm) OD

APPROVALS

US:	UL LISTED
CANADA:	C-UL LISTED

Voltage rating is 600V or the rating of the cable, whichever is less.

Connections made via screw terminal

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	DIMENSIONS ARE IN INCHES AND [MM]	NAME	MATERIAL	COMMENTS:	MENCOM CORPORATION	
DRAWN		BEM			TITLE:	
CHECKED						
ENG APPR.						
MFG APPR.						
Q.A.						
SIZE	DWG. NO.		DO NOT SCALE DRAWING		SCALE: 2:1	WEIGHT:
B	MIN-5MPM-FWX					SHEET 1 OF 1
REV	A					