


PIN #	COLOR
1	WHITE
2	RED
3	GREEN / YELLOW
4	ORANGE
5	BLACK

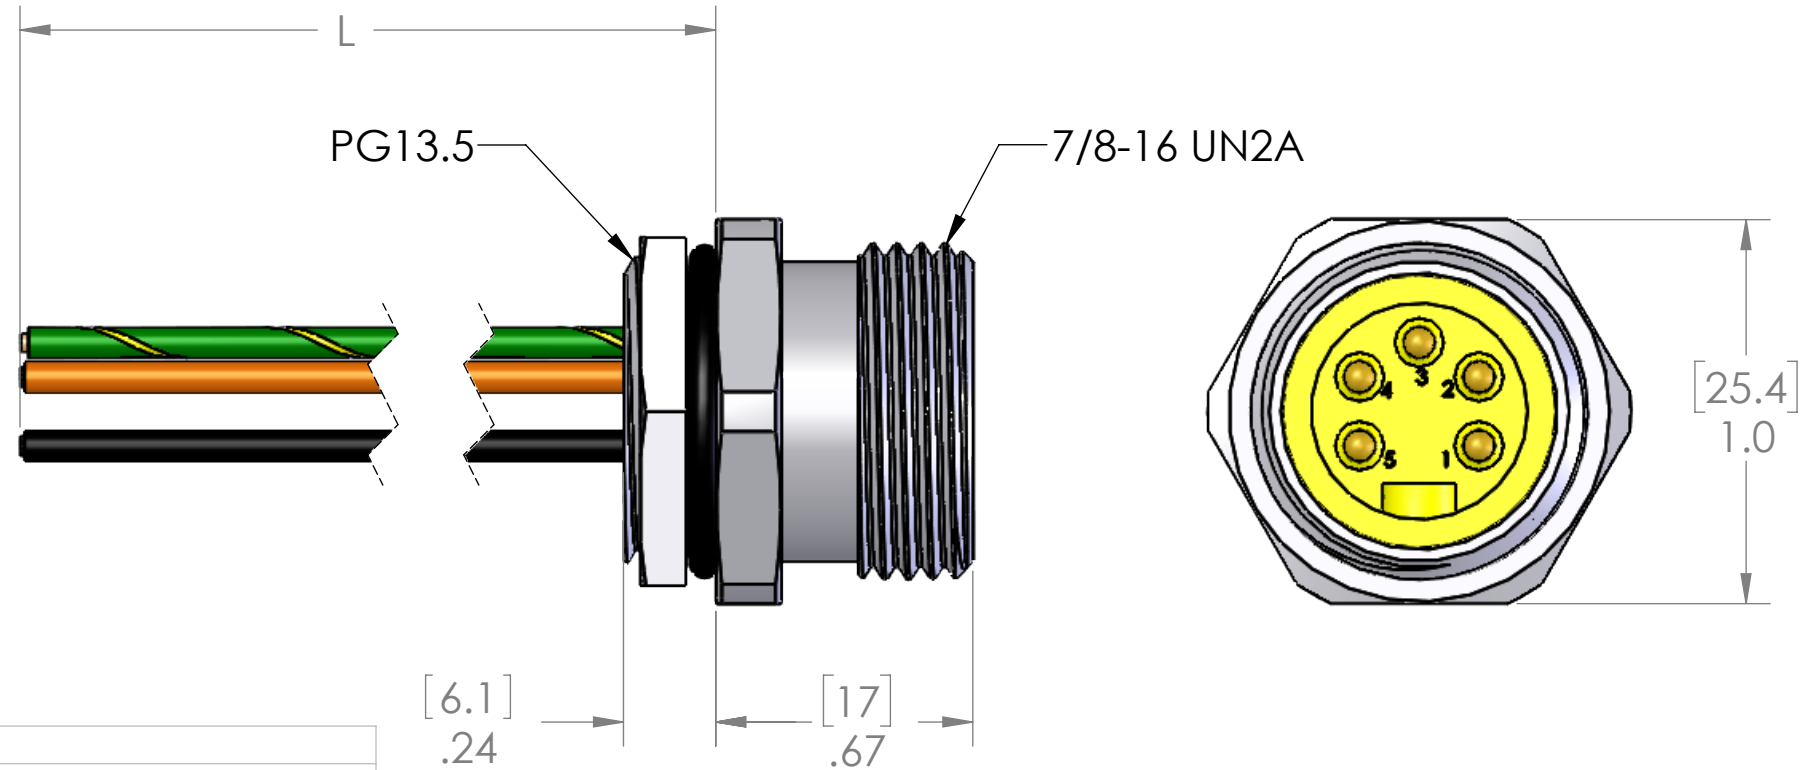

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1007/1569
AWG:	18 AWG
JACKET:	PVC
VOLTAGE:	300V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	NICKEL PLATED BRASS
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

TABLE A	
P/N	L
MIN-5MR-1-18-PG13.5	12" [0.3m]
MIN-5MR-2-18-PG13.5	24" [0.6m]
MIN-5MR-3-18-PG13.5	36" [0.9m]
MIN-5MR-4-18-PG13.5	48" [1.2m]
MIN-5MR-5-18-PG13.5	60" [1.5m]
MIN-5MR-6-18-PG13.5	72" [1.8m]
MIN-5MR-10-18-PG13.5	120" [3.1m]
MIN-5MR-12-18-PG13.5	144" [3.7m]
MIN-5MR-15-18-PG13.5	180" [4.6m]
MIN-5MR-20-18-PG13.5	240" [6.1m]

OTHER LENGTHS ARE AVAILABLE
PLEASE CONSULT FACTORY

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	ADM		MENCOM CORPORATION					
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	01/11/2024					TITLE: 5 PL ML MIN RECP		
		CHECKED BY	RP							
		CHECK DATE	01/17/2024							
					SIZE DWG. NO. REV B MIN-5MR-ZZ-18-PG13.5 B					
MATERIAL		COMMENTS:								
FINISH										
DO NOT SCALE DRAWING		SCALE: 2:1		WEIGHT:		SHEET 1 OF 1				

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	5.5A
TEMP:	105°C

DO NOT SCALE DRAWING