


PIN #	COLOR
1	WHITE
2	RED
3	GREEN / YELLOW
4	ORANGE
5	BLACK

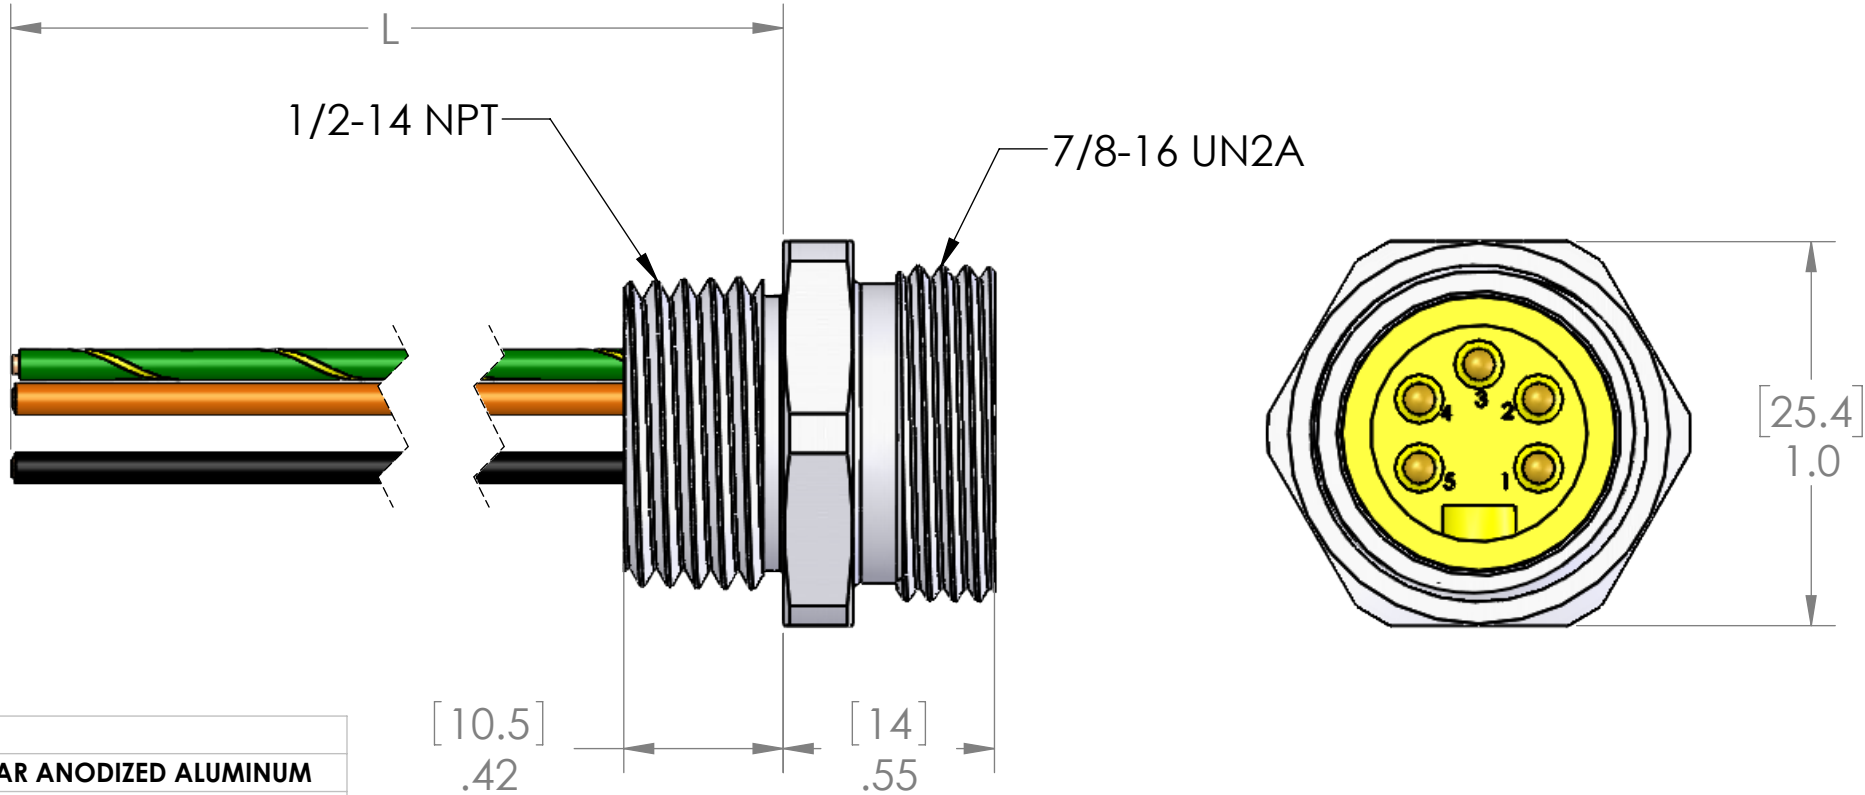

AN O-RING AND LOCKNUT ARE INCLUDED  
ON LENGTHS OF 24" [0.6M] AND LONGER.

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1007/1569
AWG:	18 AWG
JACKET:	PVC
VOLTAGE:	300V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	ZINC PLATED STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

TABLE A	
P/N	L
MIN-5MR-1-18	12" [0.3m]
MIN-5MR-2-18	24" [0.6m]
MIN-5MR-3-18	36" [0.9m]
MIN-5MR-4-18	48" [1.2m]
MIN-5MR-5-18	60" [1.5m]
MIN-5MR-6-18	72" [1.8m]
MIN-5MR-8-18	96" [2.4m]
MIN-5MR-10-18	120" [3.0m]
MIN-5MR-15-18	180" [4.6m]
MIN-5MR-20-18	240" [6.1m]

OTHER LENGTHS ARE AVAILABLE  
PLEASE CONSULT FACTORY

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

VOLTS	300V
AMPS	5.5A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	11/30/2023
		CHECKED BY	JJH
		CHECK DATE	11/30/2023
		COMMENTS:	
MATERIAL			
FINISH			
DO NOT SCALE DRAWING			

MENCOM CORPORATION		
TITLE: 5 PL ML MIN RECP		
SIZE B	DWG. NO. MIN-5MR-ZZ-18	REV C
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1