


PIN #	COLOR
1	WHITE
2	RED
3	GREEN / YELLOW
4	ORANGE
5	BLACK


D

D

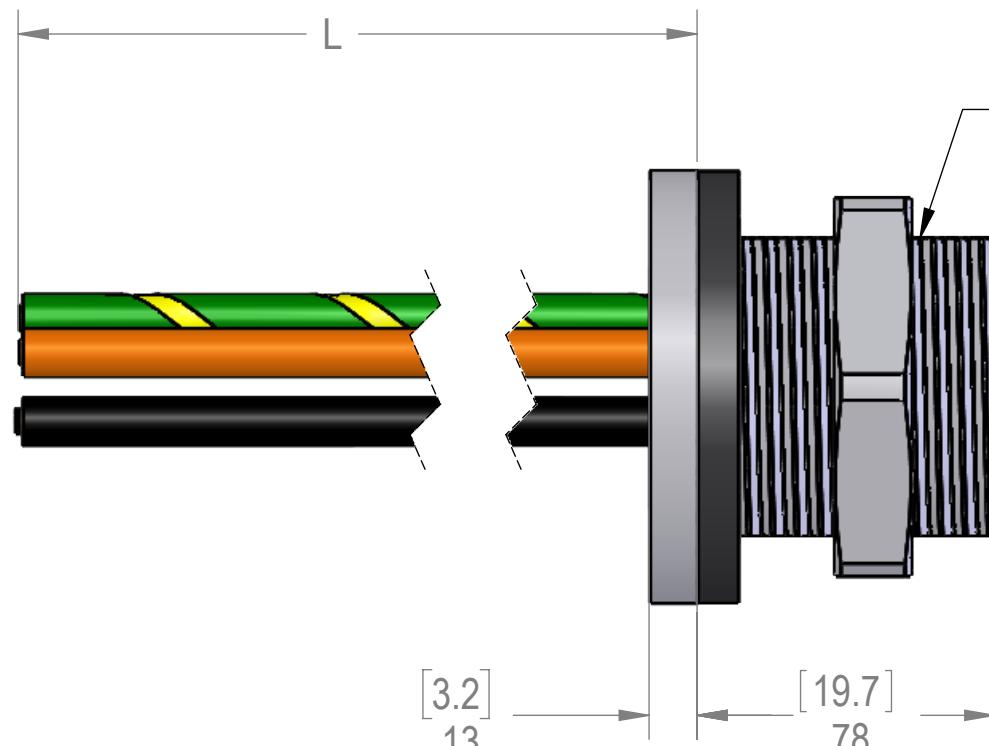

C


C

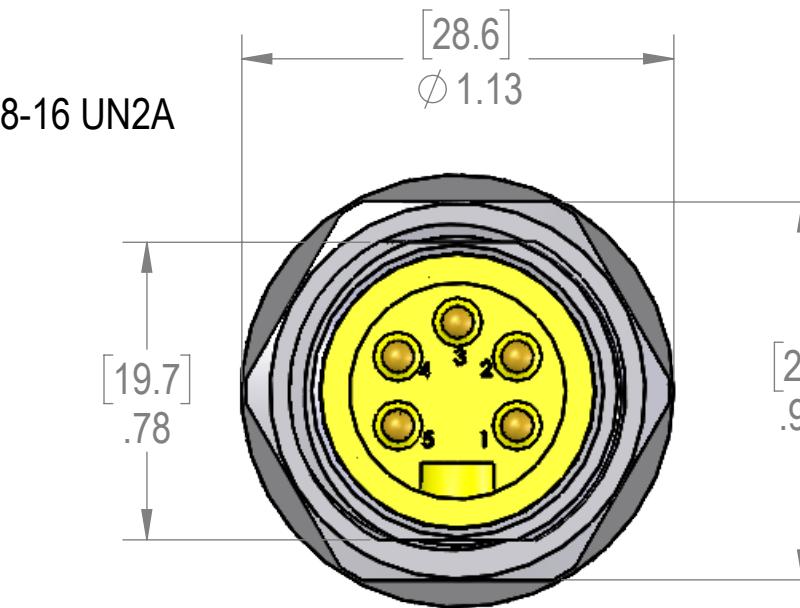

B

B

RECOMMENDED CUT-OUT

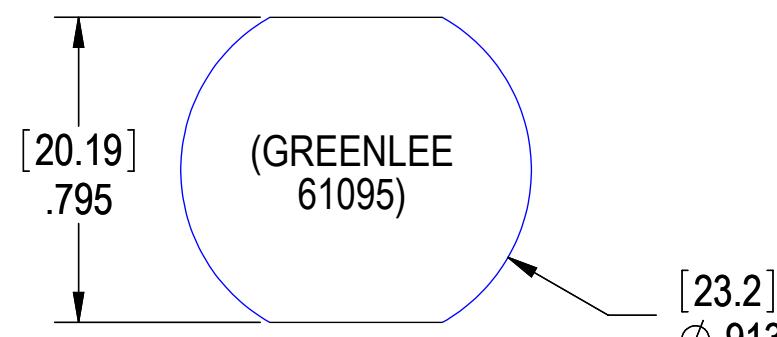

MATERIALS	
SHELL:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1015
AWG:	16 AWG
JACKET:	PVC
VOLTAGE:	600V
INSERT:	YELLOW PVC
GASKET:	NBR
NUT:	NICKEL PLATED BRASS

A

A

APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES

RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS 600V
AMPS 8A
TEMP: 105°C

MATERIAL
FINISH
DO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

DRAWN BY ADM
DRAWN DATE 01/11/2024
CHECKED BY JJH
CHECK DATE 01/12/2024

COMMENTS:

SIZE DWG. NO. REV
B MIN-5MR-ZZ-BM B
SCALE: 2:1 WEIGHT: SHEET 1 OF 1

P/N	L
MIN-5MR-1-BM	12" [0.3m]
MIN-5MR-2-BM	24" [0.6m]
MIN-5MR-3-BM	36" [0.9m]
MIN-5MR-4-BM	48" [1.2m]
MIN-5MR-6-BM	72" [1.8m]
MIN-5MR-10-BM	120" [3.1m]
MIN-5MR-15-BM	180" [4.6m]
MIN-5MR-20-BM	240" [6.1m]

OTHER LENGTHS ARE AVAILABLE,
PLEASE CONSULT FACTORY.

MENCOM CORPORATION

TITLE:
5 POL ML RECP 16AWG

1