


PIN #	COLOR
1	WHITE
2	RED
3	GREEN / YELLOW
4	ORANGE
5	BLACK

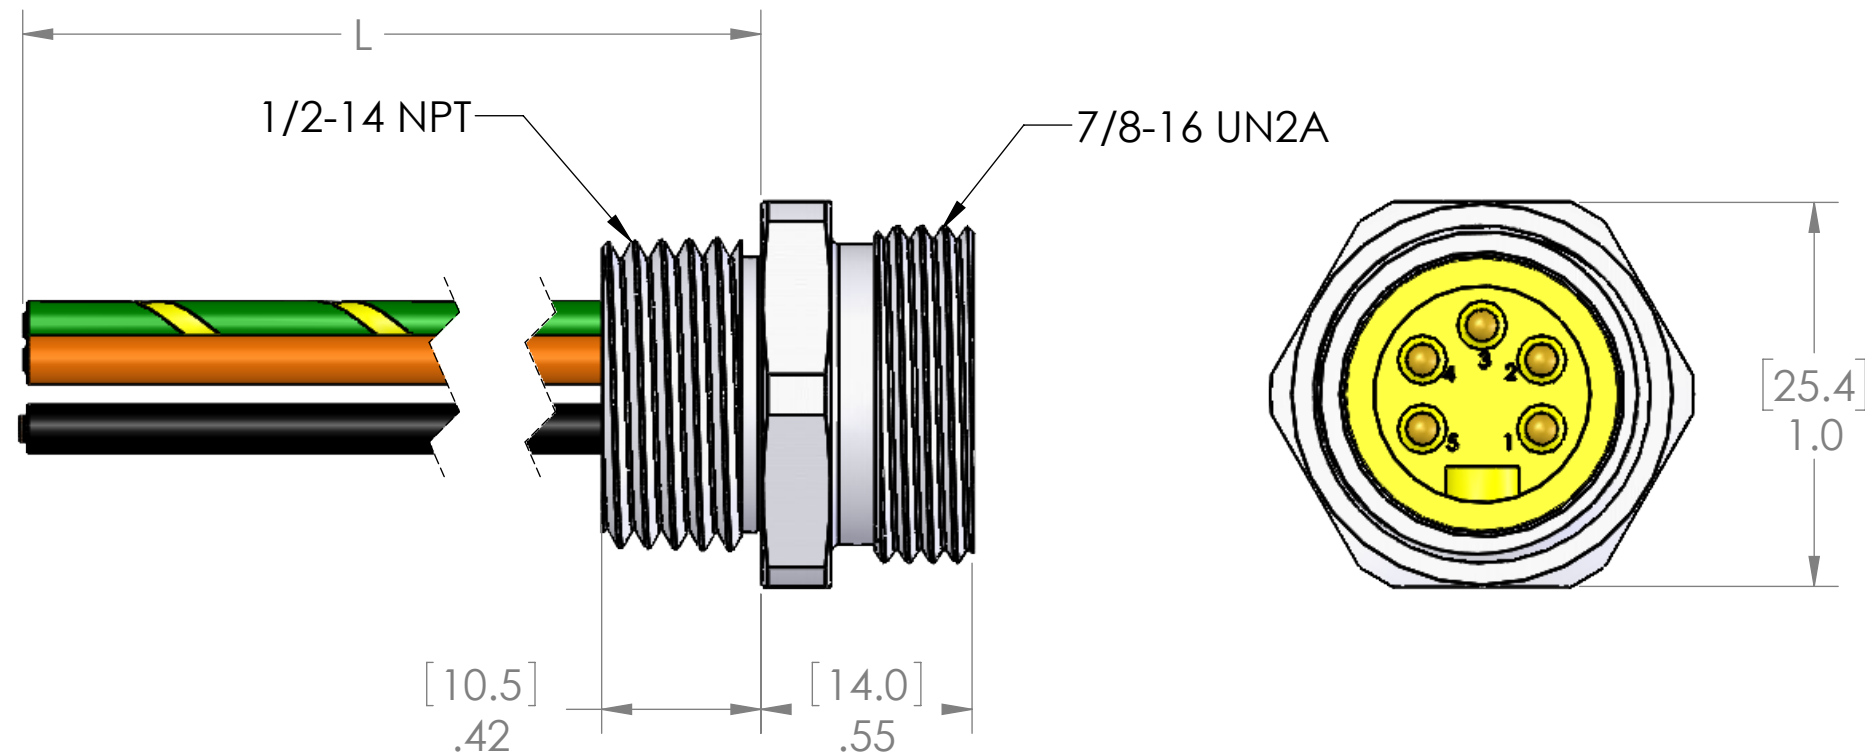

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1015
AWG:	16 AWG
JACKET:	PVC
VOLTAGE:	600V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	ZINC PLATED STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

AN O-RING AND LOCKNUT ARE INCLUDED  
ON LENGTHS OF 24" [0.6M] AND LONGER.

TABLE A	
P/N	L
MIN-5MR-1	12" [0.3m]
MIN-5MR-2	24" [0.6m]
MIN-5MR-3	36" [0.9m]
MIN-5MR-4	48" [1.2m]
MIN-5MR-6	72" [1.8m]
MIN-5MR-10	120" [3.0m]
MIN-5MR-15	180" [4.6m]
MIN-5MR-20	240" [6.0m]

OTHER LENGTHS ARE AVAILABLE  
PLEASE CONSULT FACTORY

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	ADM	MENCOM CORPORATION					
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	11/30/2023				TITLE:  5 POL MALE RECP 16AWG		
		CHECKED BY	JJH						
		CHECK DATE	01/11/2024						
		COMMENTS:		SIZE DWG. NO. REV <b>B</b> MIN-5MR-ZZ <b>C</b>					
MATERIAL									
FINISH									
DO NOT SCALE DRAWING									
				SCALE: 2:1	WEIGHT:	SHEET 1 OF 1			

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

VOLTS	600V
AMPS	8A
TEMP:	105°C