


PIN #	COLOR
1	RED w/WHITE
2	RED
3	GREEN / YELLOW
4	RED w/YELLOW
5	RED w/BLACK

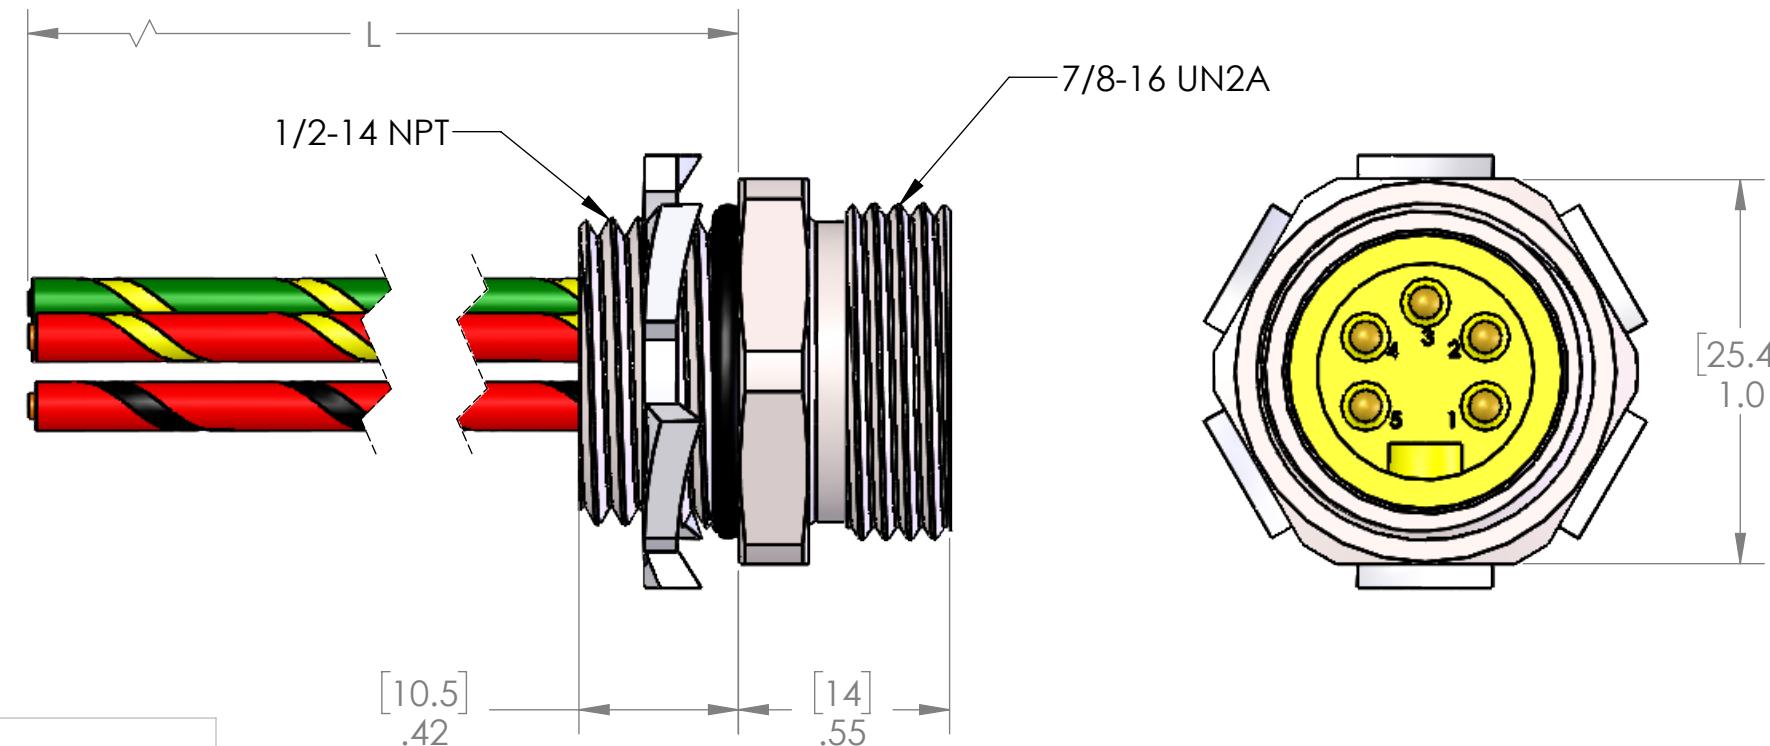

MATERIALS	
SHELL:	STAINLESS STEEL
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1015
AWG:	16 AWG
JACKET:	PVC
VOLTAGE:	600V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	ZINC PLATED STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

VOLTS	600V
AMPS	8A
TEMP:	105°C

DO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM	MENCOM CORPORATION
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	12/05/2023	
	CHECKED BY	JJH	
	CHECK DATE	01/12/2024	
	COMMENTS:		
SIZE	DWG. NO.	REV	
B	MIN-5MR-ZZA-SS	B	
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1	

P/N	L
MIN-5MR-.5A-SS	6"[0.15M]
MIN-5MR-1A-SS	12"[0.3M]
MIN-5MR-2A-SS	24"[0.6M]
MIN-5MR-3A-SS	36"[0.9M]
MIN-5MR-4A-SS	48"[1.2M]
MIN-5MR-6A-SS	72"[1.8M]
MIN-5MR-10A-SS	120"[3M]

OTHER LENGTHS ARE AVAILABLE  
PLEASE CONSULT FACTORY

MENCOM CORPORATION

TITLE:  
5 POL MALE RECP  
16AWG

SIZE DWG. NO. REV  
B MIN-5MR-ZZA-SS B  
SCALE: 2:1 WEIGHT: SHEET 1 OF 1