
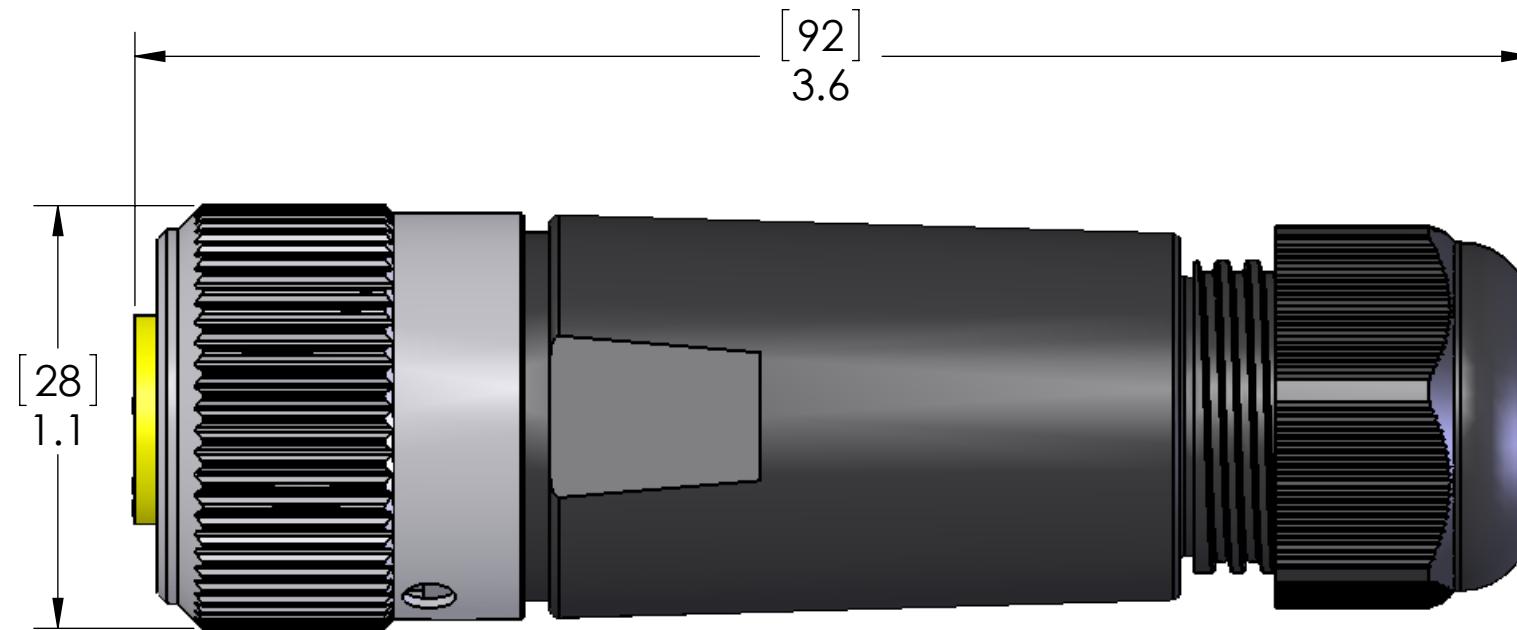


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	8/15/2006	

D

D

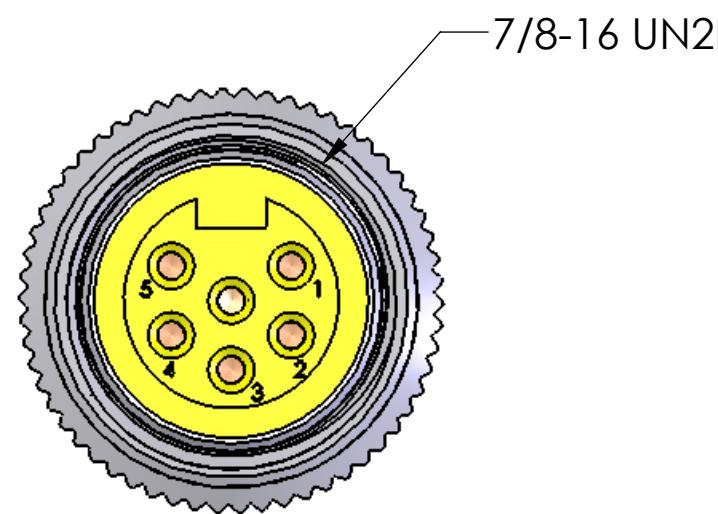

MATERIALS

BODY:	BLACK POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE SEAL:	NBR
INSERT:	YELLOW PVC
COUPLING:	NICKEL PLATED BRASS

RATINGS

AMPS:	16AWG - 8A max 18AWG - 5.5A max
VOLTS:	20-22AWG - 4A max 600V MAX

SEAL:	IP67
CABLE RANGE:	16AWG - 22AWG 0.20" - 0.51" (5mm - 13mm) OD

APPROVALS

US:	UL LISTED
CANADA:	C-UL LISTED

Voltage rating is 600V or the rating of the cable, whichever is less.

Connections made via screw terminal

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	NAME	MENCOM CORPORATION
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	
	BEM	
	CHECKED	
	ENG APPR.	
	MFG APPR.	
COMMENTS:	Q.A.	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		
SIZE	DWG. NO.	REV
B	MIN-6FP-FW	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1