PIN #	COLOR
1	WHITE
2	RED
3	GREEN / YELLOW
4	ORANGE
5	BLACK
6	BLUE

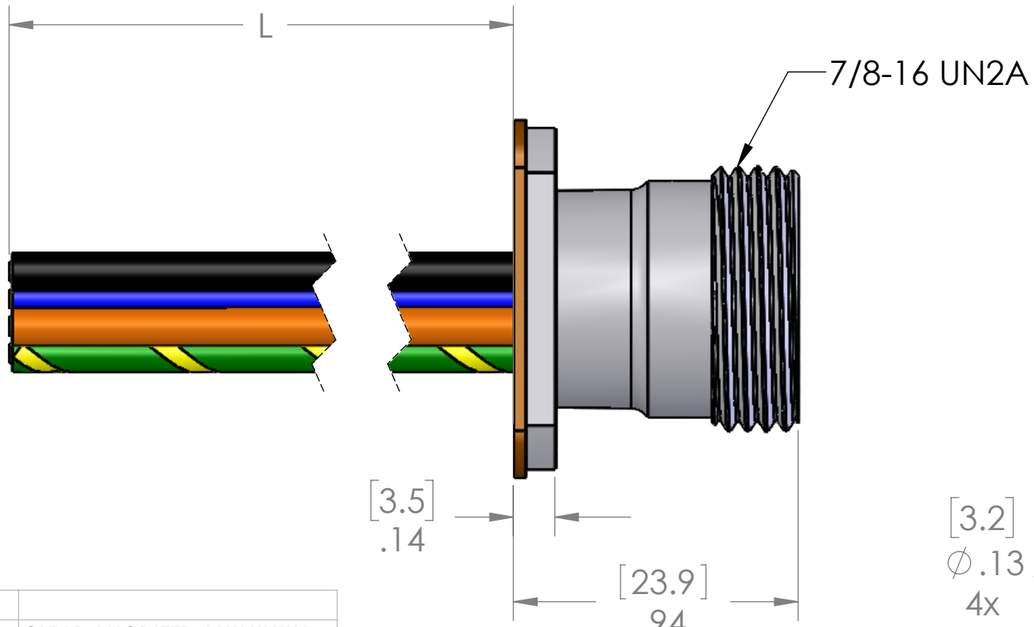

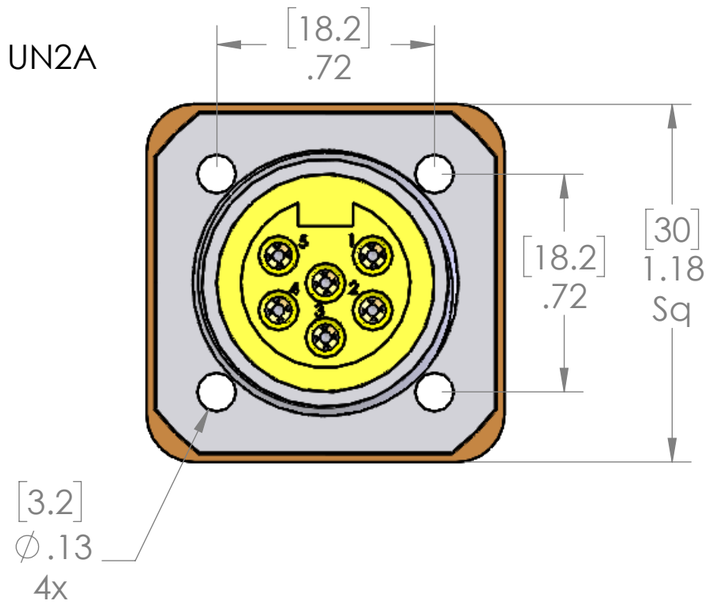

P/N	L
MIN-6FR-1-PM	12" [0.3m]
MIN-6FR-2-PM	24" [0.6m]
MIN-6FR-3-PM	36" [0.9m]
MIN-6FR-4-PM	48" [1.2m]
MIN-6FR-5-PM	60" [1.5m]
MIN-6FR-6-PM	72" [1.8m]
MIN-6FR-10-PM	120" [3m]

OTHER LENGTHS ARE AVAILABLE
PLEASE CONSULT FACTORY

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1015
AWG:	16 AWG
JACKET:	PVC
VOLTAGE:	600V
INSERT:	YELLOW PVC
GASKET:	NBR
NUT:	N/A
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	8A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	12/19/2023
CHECKED BY	JJH
CHECK DATE	01/11/2024

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE B | DWG. NO. MIN-6FR-ZZ-PM | REV B

SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1