

D


C

B


A

PIN #	COLOR
1	WHITE
2	RED
3	GREEN/YELLOW
4	ORANGE
5	BLACK
6	BLUE

MATERIALS	
SHELL:	ZINC DIE CAST
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1015
AWG:	16 AWG
JACKET:	PVC
VOLTAGE:	600V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	ZINC PLATED STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

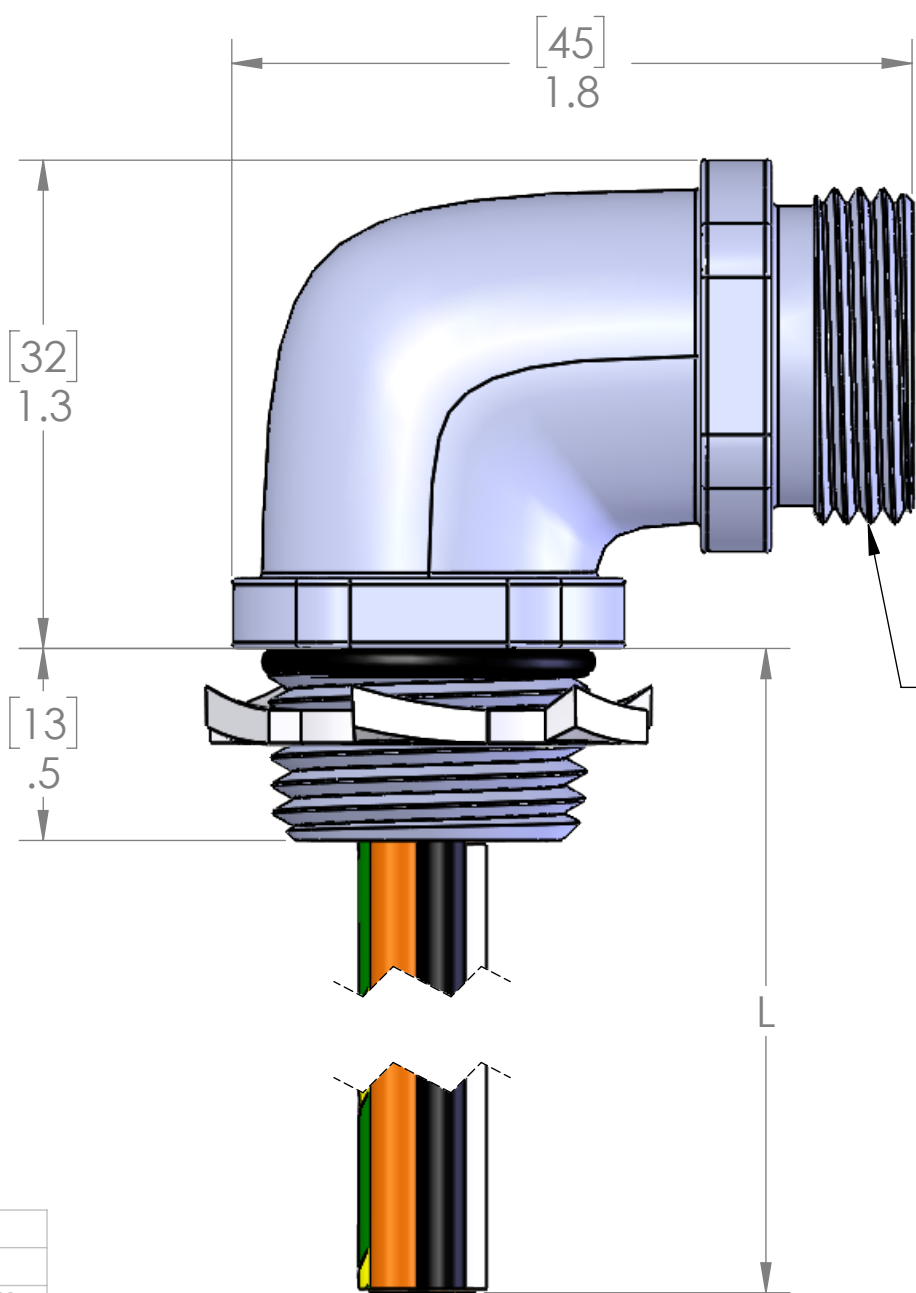

7/8-16 UN2A

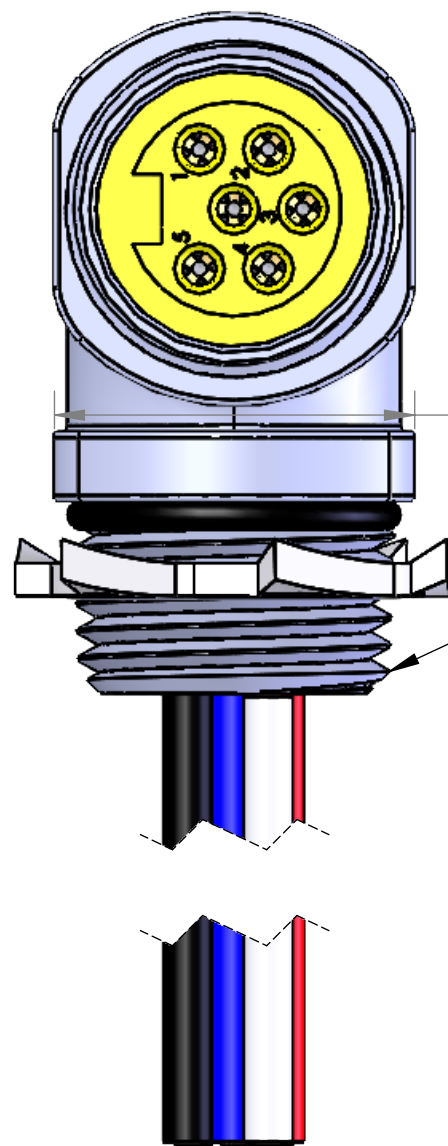

[24]
[.9]

1/2-14NPT

TABLE A

P/N	L
MIN-6FR-1-R	10" [0.3m]
MIN-6FR-2-R	22" [0.6m]
MIN-6FR-3-R	36" [0.9m]
MIN-6FR-4-R	48" [1.2m]
MIN-6FR-5-R	60" [1.5m]
MIN-6FR-6-R	72" [1.8m]
MIN-6FR-10-R	120" [4.7m]

OTHER LENGTHS AVAILABLE,
PLEASE CONSULT FACTORY

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
B	MIN-6FR-ZZ-R	B
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	600V
AMPS	8A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	JJH
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	12/19/2023
	CHECKED BY	JJH
	CHECK DATE	01/11/2024
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		