
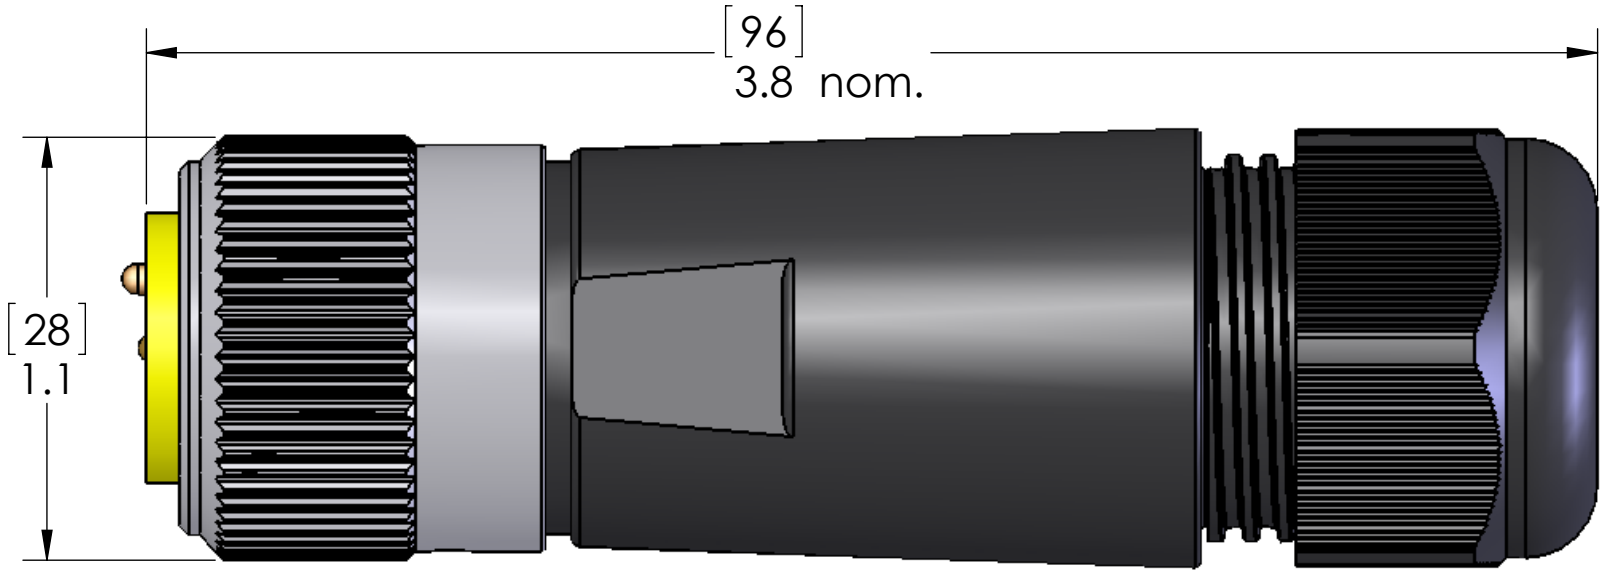


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	8/15/2006	BEM

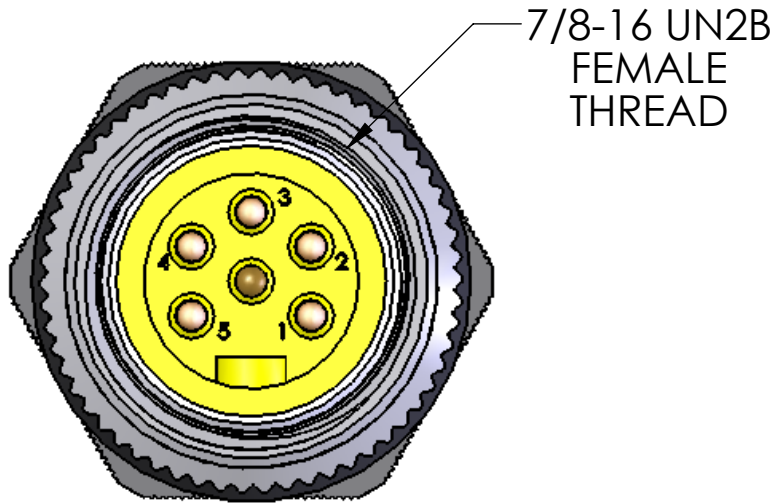

MATERIALS	
BODY:	BLACK POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE SEAL:	NBR
INSERT:	YELLOW PVC
COUPLING:	NICKEL PLATED BRASS
RATINGS	
AMPS:	16AWG - 8A max 18AWG - 5.5A max 20-22AWG - 4A max
VOLTS:	600V MAX
SEAL:	IP67
CABLE RANGE:	16AWG - 22AWG 0.31" - 0.67" (8mm - 17mm) OD
APPROVALS	(16-20AWG ONLY)
US:	UL LISTED
CANADA:	C-UL LISTED

Voltage rating is 600V or the rating of the cable, whichever is less.

Connections made via screw terminal

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION	
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN	BEM	TITLE:
		CHECKED		
		ENG APPR.		
		MFG APPR.		
MATERIAL		Q.A.		SIZE
		COMMENTS:		
FINISH				DWG. NO.
DO NOT SCALE DRAWING				MIN-6MP-FWX
				REV
				A
		SCALE: 2:1	WEIGHT:	SHEET 1 OF 1