
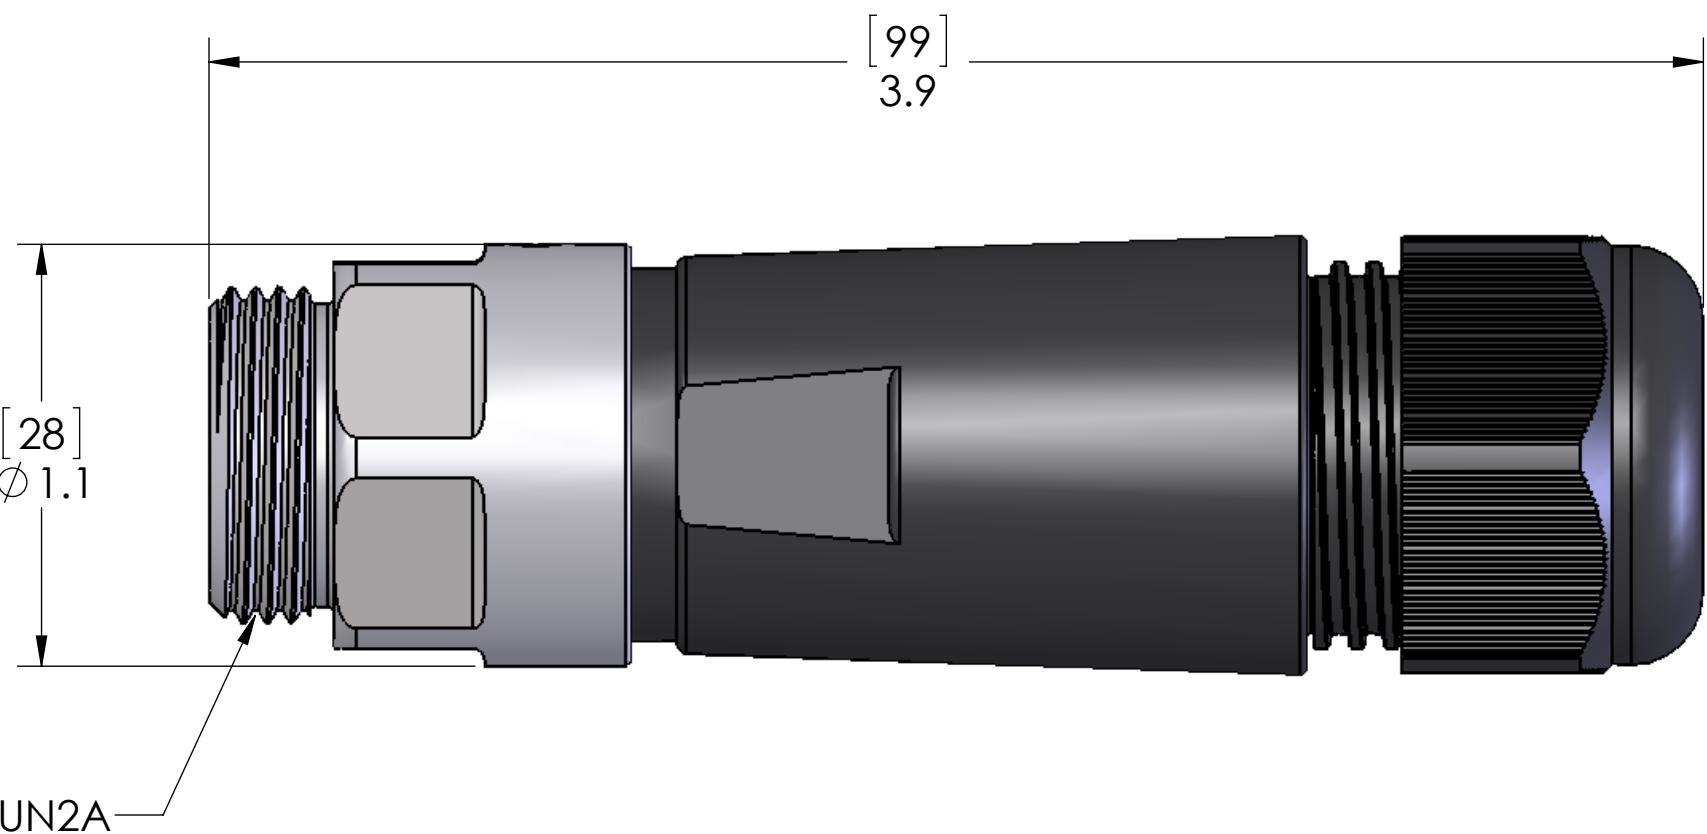


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	4/26/2016	BEM

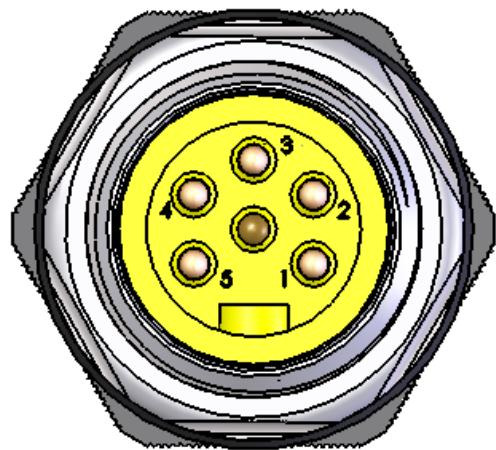

MATERIALS

BODY:	BLACK POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE SEAL:	NBR
INSERT:	YELLOW PVC
COUPLING:	NICKEL PLATED BRASS

RATINGS

AMPS:	16AWG - 8A max
	18AWG - 5.5A max
	20-22AWG - 4A max
VOLTS:	600V MAX
SEAL:	IP67
CABLE RANGE:	16AWG - 22AWG
	0.31" - 0.67" (8mm - 17mm) OD

APPROVALS	(16-20AWG ONLY)
US:	UL LISTED
CANADA:	C-UL LISTED

Voltage rating is 600V or the rating of the cable, whichever is less.

Connections made via screw terminal

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	NAME	MATERIAL	MENCOM CORPORATION	
	DRAWN		DWG. NO.	
	CHECKED			
	ENG APPR.			
	MFG APPR.			
	Q.A.		COMMENTS:	
SPECIFICATIONS		FINISH	SIZE	DWG. NO.
			B	MIN-6MPM-FWX-SS
			REV	A
			SCALE: 2:1	WEIGHT:
				SHEET 1 OF 1