


8 7 6 5 4 3 2 1

PIN #	COLOR
1	WHITE
2	RED
3	GREEN / YELLOW
4	ORANGE
5	BLACK
6	BLUE

D

D

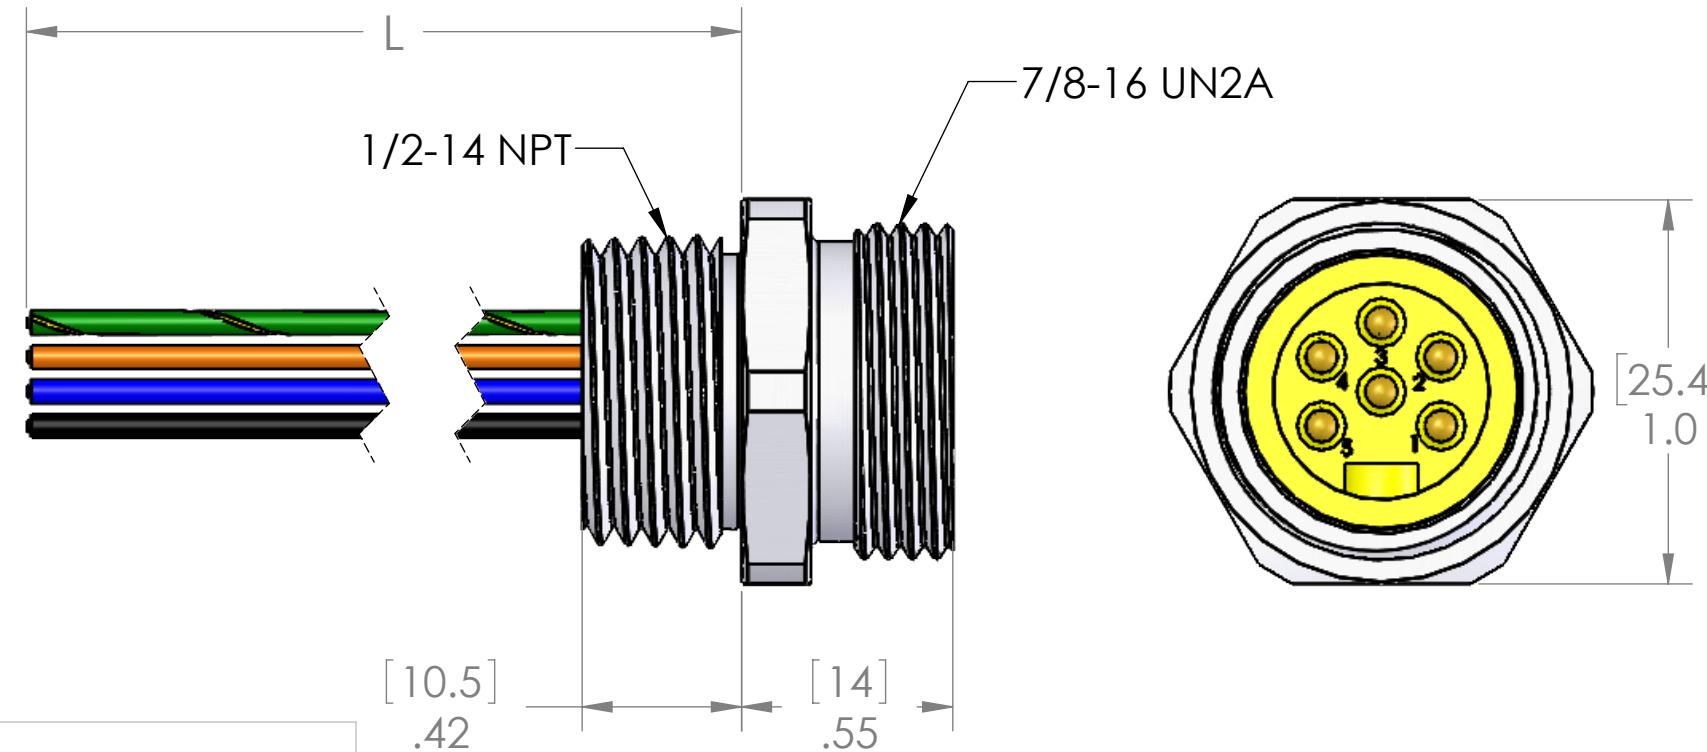

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1007/1569
AWG:	22 AWG
JACKET:	PVC
VOLTAGE:	300V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	ZINC PLATED STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

A

A

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS 300V
AMPS 4A
TEMP: 105°C

UNLESS OTHERWISE SPECIFIED: DRAWN BY ADM
DIMENSIONS ARE IN INCHES DRAWN DATE 01/16/2024
AND [MM] CHECKED BY JJH
CHECK DATE 01/17/2024
COMMENTS:
MATERIAL FINISH
DO NOT SCALE DRAWING

P/N	L
MIN-6MR-1-22	12" [0.3m]
MIN-6MR-2-22	24" [0.6m]
MIN-6MR-3-22	36" [0.9m]
MIN-6MR-4-22	48" [1.2m]
MIN-6MR-5-22	60" [1.5m]
MIN-6MR-6-22	72" 1.8m]
MIN-6MR-10-22	120" [3m]

OTHER LENGTHS ARE AVAILABLE
PLEASE CONSULT FACTORY

MENCOM CORPORATION

TITLE:

SIZE DWG. NO. REV
B MIN-6MR-ZZ-22 B
SCALE: 2:1 WEIGHT: SHEET 1 OF 1

8 7 6 5 4 3 2 1