MALE	WIRING	FEMALE
PIN #		PIN #
1	----------	1
2	----------	2
3	----------	3
4	----------	4
5	----------	5
6	----------	6
7	----------	7
8	----------	8

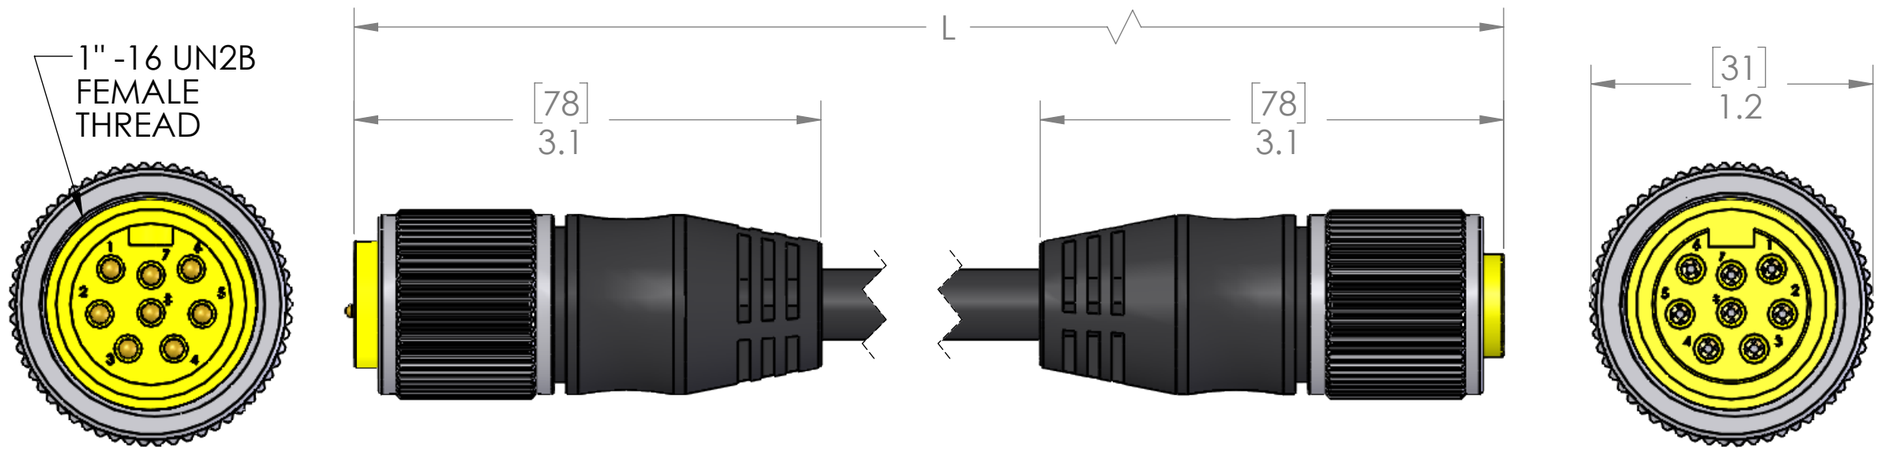

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	TC-ER
AWG:	16 AWG
JACKET:	BLACK PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	YELLOW PVC
O-RING:	N/A
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

TABLE A		
P/N	L	STD?
MIN-8MFP-3-C011	36" [0.9M]	YES
MIN-8MFP-6-C011	72" [1.8M]	YES
MIN-8MFP-12-C011	144" [3.7M]	YES
MIN-8MFP-15-C011	180" [4.6M]	NO
MIN-8MFP-20-C011	240" [6.1M]	YES
MIN-8MFP-30-C011	360" [9.1M]	YES
MIN-8MFP-40-C011	480" [12.2M]	NO
MIN-8MFP-50-C011	600" [15.2M]	NO
MIN-8MFP-60-C011	720" [18.3M]	NO
MIN-8MFP-100-C011	1200" [30.5M]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	7A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	GO
DRAWN DATE	03/06/2024
CHECKED BY	JJH
CHECK DATE	03/08/2024

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
B	MIN-8MFP-ZZ-C011	B

SCALE: 1:2 | WEIGHT: | SHEET 1 OF 1