

8 7 6 5 4 3 2 1

PIN #	COLOR
1	ORANGE
2	BLUE
3	WHITE w/BLACK
4	BLACK
5	WHITE
6	RED
7	GREEN / YELLOW
8	RED w/ BLACK

D

D

C

C


B

B

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1015
AWG:	16 AWG
JACKET:	PVC
VOLTAGE:	600V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	ZINC PLATED STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

A

A

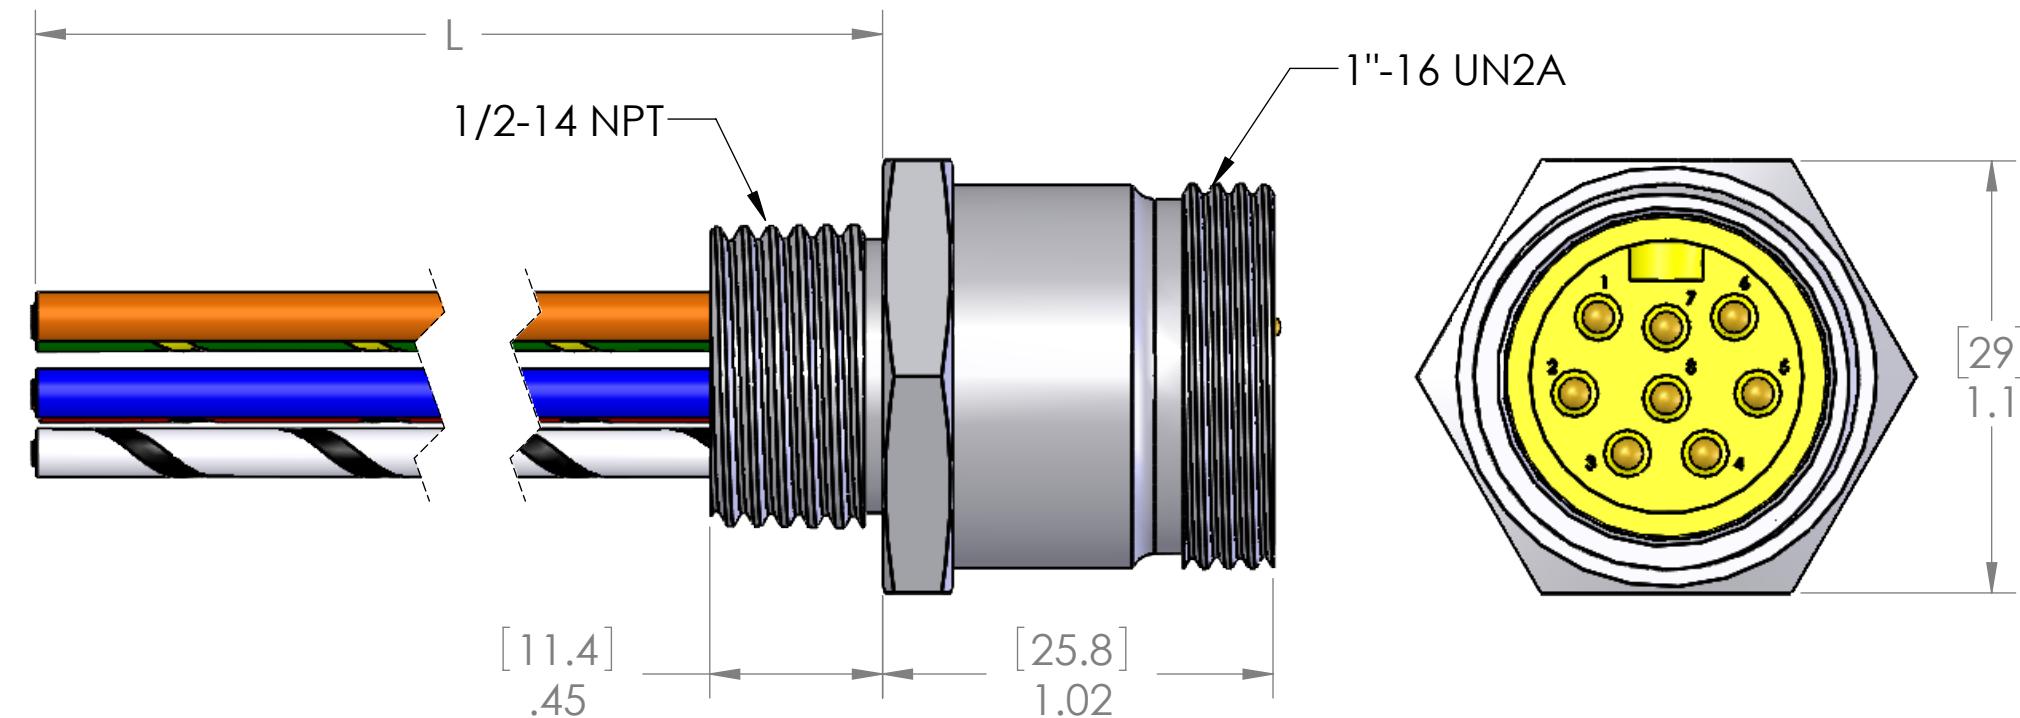

AN O-RING AND LOCKNUT ARE INCLUDED
ON LENGTHS OF 24" [0.6M] AND LONGER.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS 600V
AMPS 7A
TEMP: 105°C

UNLESS OTHERWISE SPECIFIED: DRAWN BY ADM
DIMENSIONS ARE IN INCHES DRAWN DATE 03/08/2024
AND [MM] CHECKED BY JJH
CHECK DATE 03/11/2024
COMMENTS:
MATERIAL FINISH
DO NOT SCALE DRAWING

P/N	L
MIN-8MR2-1	12" [0.3m]
MIN-8MR2-2	24" [0.6m]
MIN-8MR2-3	36" [0.9m]
MIN-8MR2-4	48" [1.2m]
MIN-8MR2-5	60" [1.5m]
MIN-8MR2-6	72" [1.8m]
MIN-8MR2-10	120" [3m]

OTHER LENGTHS ARE AVAILABLE
PLEASE CONSULT FACTORY

MENCOM CORPORATION

TITLE:
8 POL MIN RECP 1/2"

SIZE DWG. NO. REV
B MIN-8MR2-ZZ B
SCALE: 2:1 WEIGHT: SHEET 1 OF 1

8 7 6 5 4 3 2 1