

8 7 6 5 4 3 2 1

PIN #	COLOR
1	ORANGE
2	BLUE
3	RED w/BLACK
4	GREEN w/BLACK
5	WHITE
6	RED
7	GREEN / YELLOW
8	WHITE w/BLACK
9	BLACK

D

D

C

C


B

B

A

A

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1007/1569
AWG:	18 AWG
JACKET:	PVC
VOLTAGE:	300V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	NICKEL PLATED BRASS
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

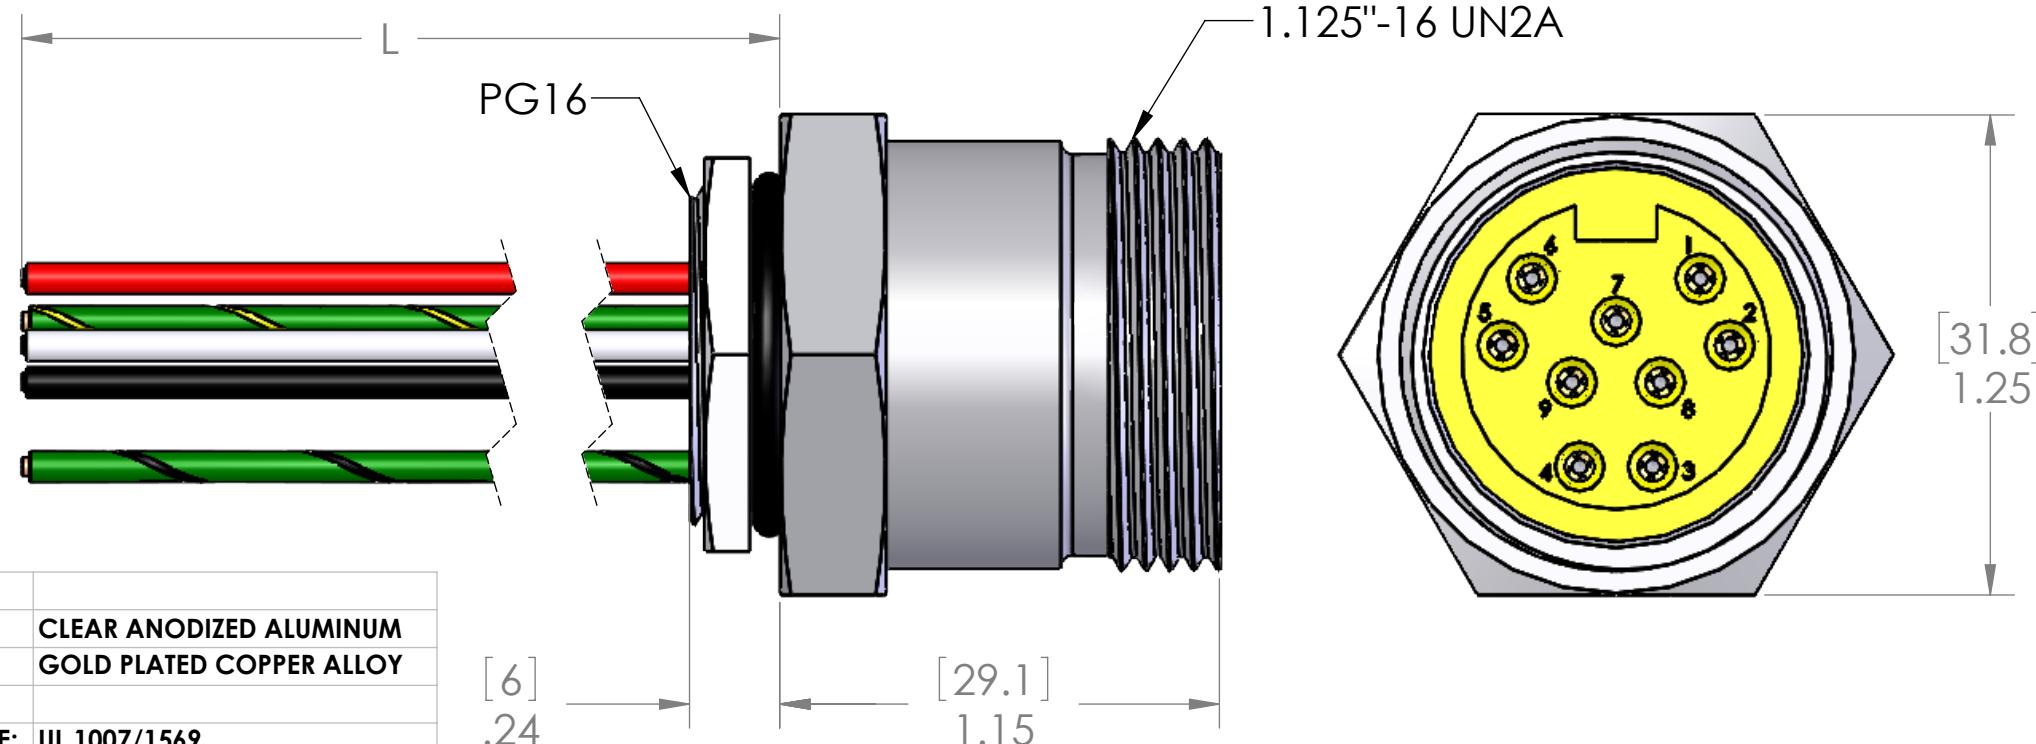

P/N	L
MIN-9FR-1-18-PG16	12" [0.3m]
MIN-9FR-2-18-PG16	24" [0.6m]
MIN-9FR-3-18-PG16	36" [0.9m]
MIN-9FR-4-18-PG16	48" [1.2m]
MIN-9FR-5-18-PG16	60" [1.5m]
MIN-9FR-6-18-PG16	72" 1.8m]
MIN-9FR-10-18-PG16	120" [3m]

OTHER LENGTHS ARE AVAILABLE  
PLEASE CONSULT FACTORY

MENCOM CORPORATION

TITLE:	
SIZE	DWG. NO.
B	MIN-9FR-ZZ-18-PG16
REV	B
SCALE: 2:1	WEIGHT:
SHEET 1 OF 1	

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

8 7 6 5 4 3 2 1