
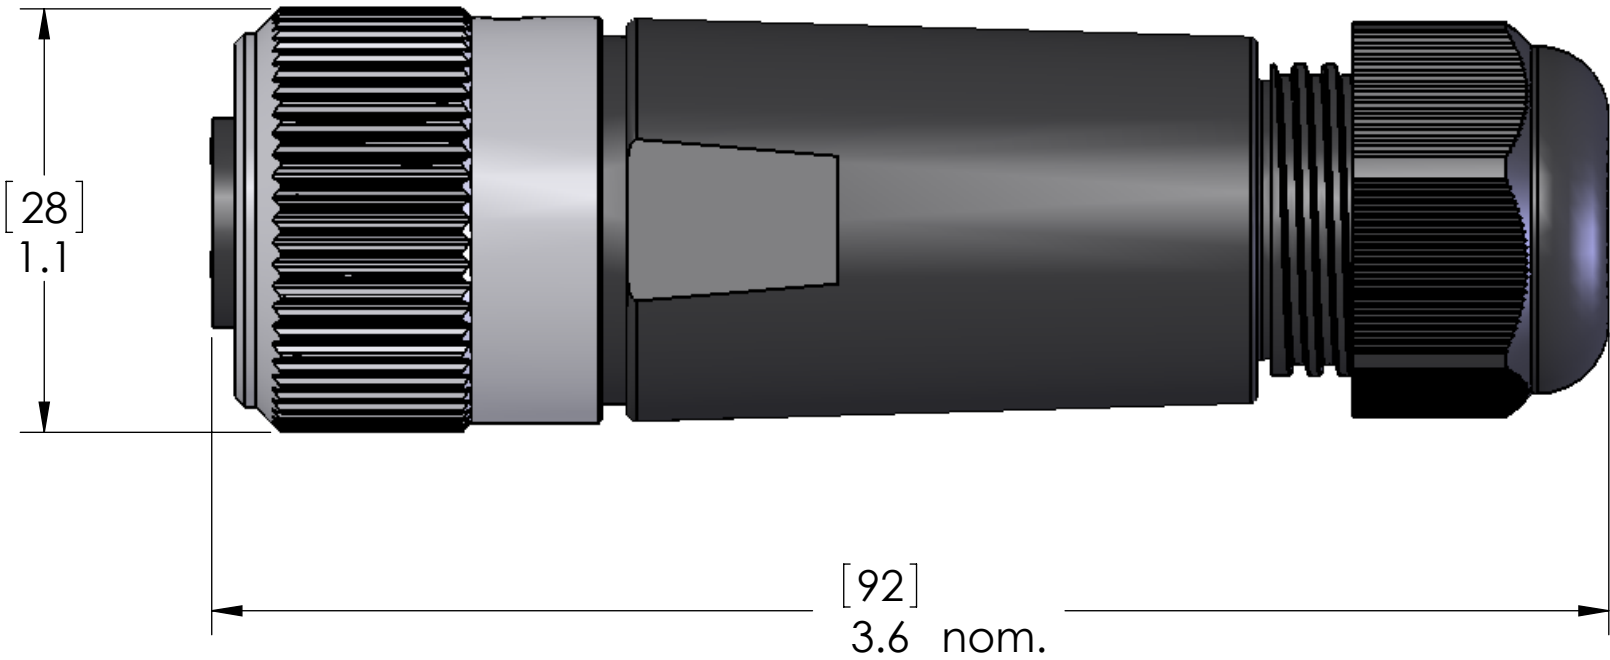


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	12/19/2007	

7/8-16 UN2B

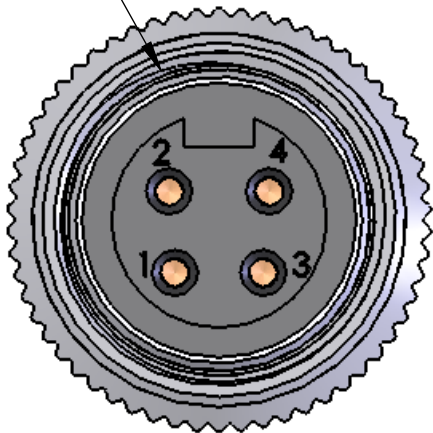

MATERIALS	
BODY:	BLACK POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE SEAL:	NBR
INSERT:	BLACK PVC
COUPLING:	NICKEL PLATED BRASS
RATINGS	
AMPS:	14AWG - 15A max 16AWG - 10A max 18AWG - 8A max 20-22AWG - 4A max
VOLTS:	600V MAX
SEAL:	IP67
CABLE RANGE:	14AWG - 22AWG 0.20" - 0.51" (5mm - 13mm) OD
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED

Voltage rating is 600V or the rating of the cable, whichever is less.

Connections made via screw terminal

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION			
		DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM	TITLE:			
			CHECKED					
			ENG APPR.					
			MFG APPR.					
			Q.A.					
			COMMENTS:		SIZE	DWG. NO.		REV
		MATERIAL			B	MINC-4FP-FW		A
		FINISH						
		DO NOT SCALE DRAWING			SCALE: 2:1	WEIGHT:		SHEET 1 OF 1