


WIRING
1 - 1
2 - 2
3 - 3
4 - 4

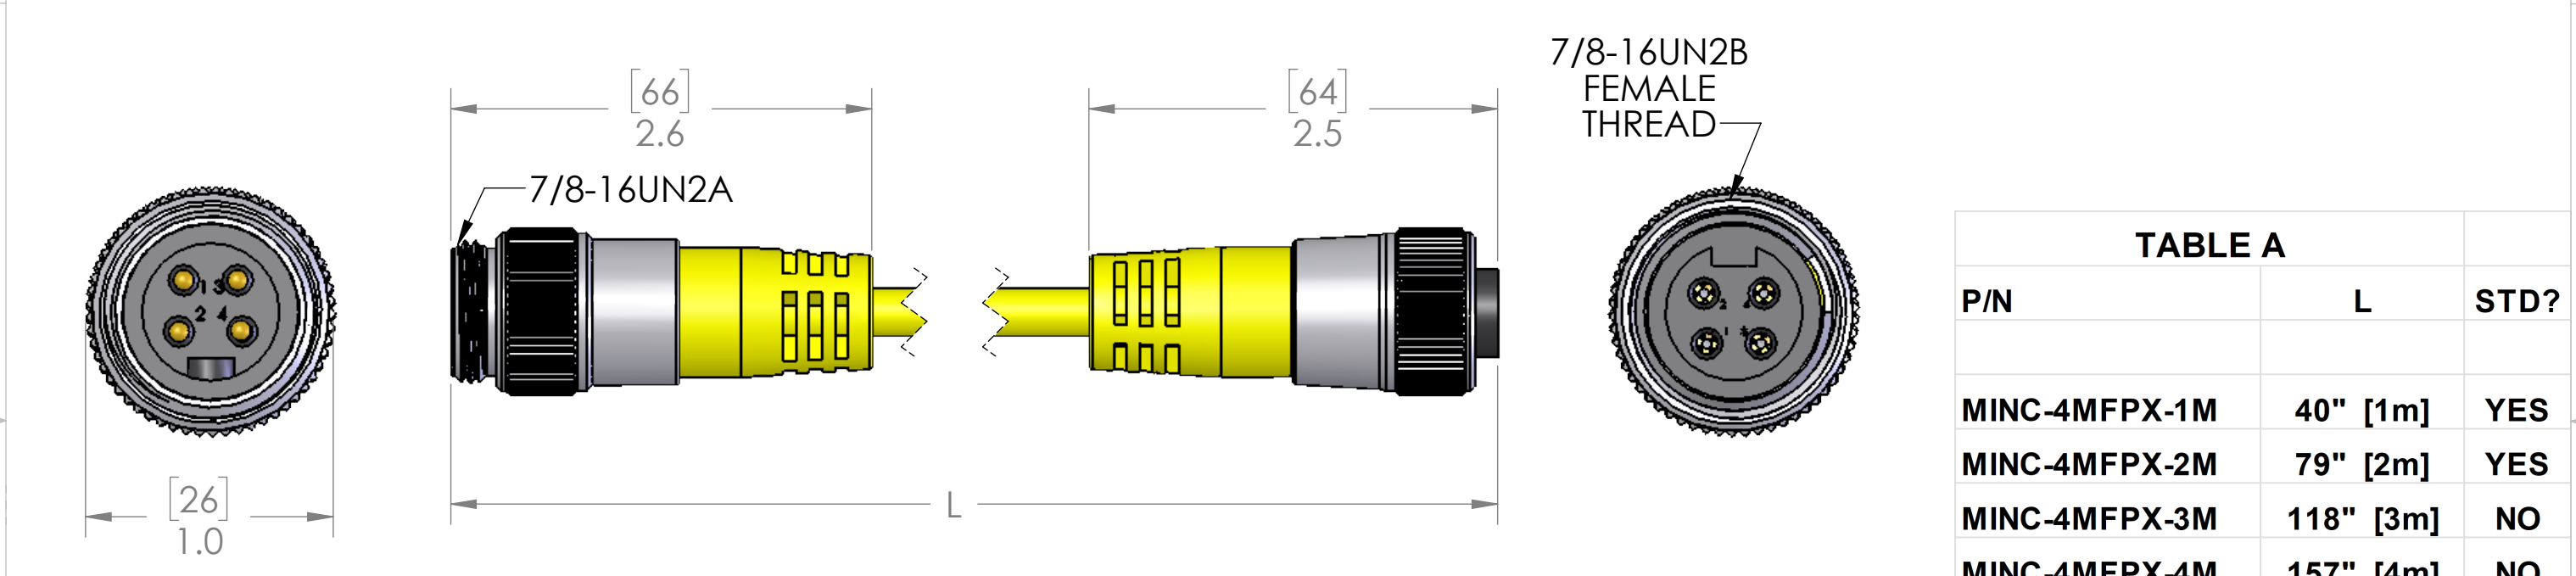

Technical drawing of a threaded plug. The drawing shows a cross-section of the plug, which has a black threaded section on the left, a grey unthreaded section in the middle, and a yellow section on the right. The yellow section has a series of vertical slots. A dimension line above the plug indicates a length of 2.6 inches, with the value [66] above it. The text 7/8-16UN2A is written next to the threaded section.

Technical drawing of a yellow and black cable connector. A dimension line above the connector indicates a length of 64 mm and 2.5 units.

TABLE A		
P/N	L	STD?
MINC-4MFPX-1M	40" [1m]	YES
MINC-4MFPX-2M	79" [2m]	YES
MINC-4MFPX-3M	118" [3m]	NO
MINC-4MFPX-4M	157" [4m]	NO
MINC-4MFPX-5M	197" [5m]	YES
MINC-4MFPX-6M	236" [6m]	YES
MINC-4MFPX-8M	315" [8m]	NO
MINC-4MFPX-10M	393" [10m]	YES
MINC-4MFPX-15M	590" [15m]	YES

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDERS REQUIRED

MATERIALS	
BODY:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	18 AWG
JACKET:	YELLOW PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	BLACK PVC
O-RING:	N/A
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

Amperage rating is per NEC when using all 4 wires as current carrying conductors.

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	8A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	ADM
	DRAWN DATE	09/22/2016
	CHECKED BY	
	CHECK DATE	
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
------	----------	-----

B	MINC-4MFPX-ZZ	A
----------	---------------	----------

SCALE: 1:1	WEIGHT:	SHEET 1 OF 1
------------	---------	--------------