


WIRING		REVISIONS			
		REV.	DESCRIPTION	DATE	APPROVED
1 - 1		A	DRAWN IN SW	3/5/2014	RSC
2 - 2		SILICONE TUBE Operating Temperatures, Continuous (min/max) degrees C -70/+200 Operating Temperatures, Intermittent (min/max) degrees C -80/+288			
3 - 3					
4 - 4	7/8-16UN2A				

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	3/5/2014	RSC

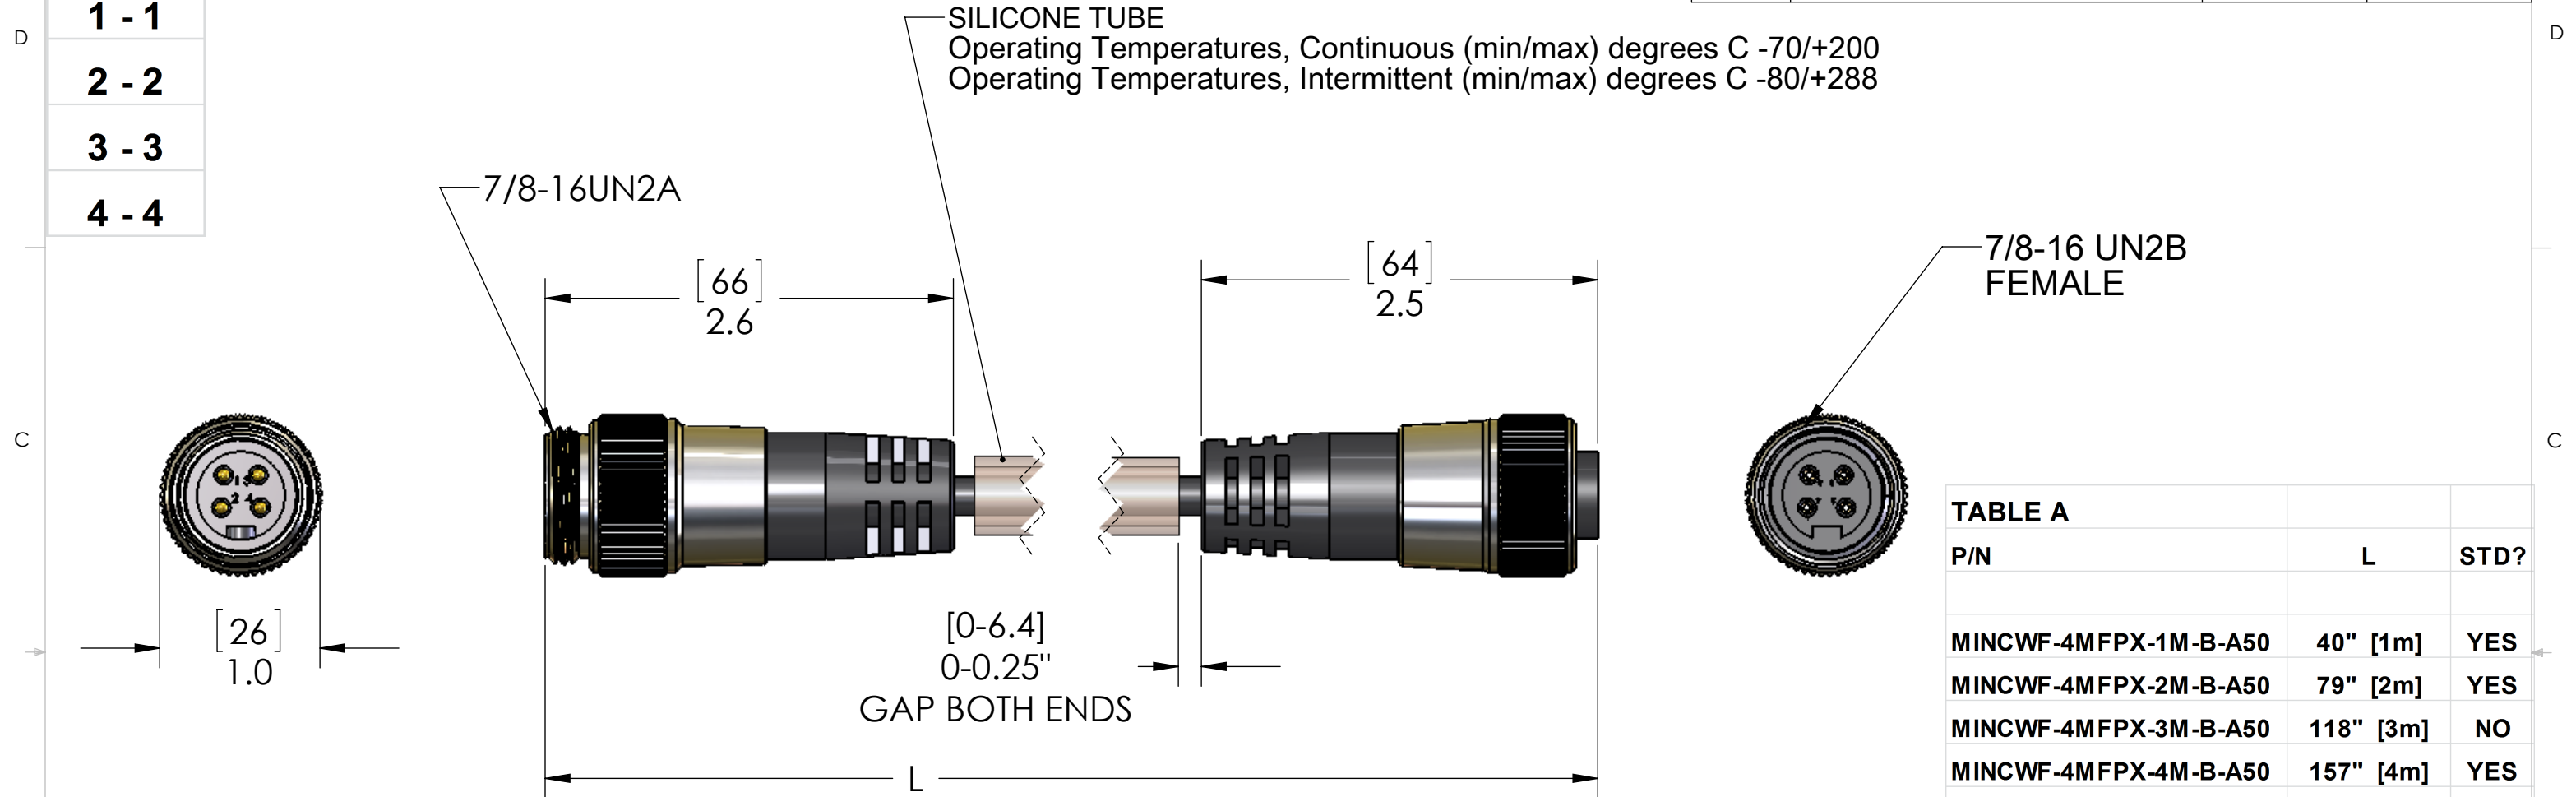

NOTE: TUBING WILL NOT BE OVERMOLDED. EXPOSED CABLE ON ONE END COULD BE AS HIGH AS 0.25", BUT THIS MEANS THE CABLE WILL BE BUTTING UP AGAINST THE CONNECTOR ON THE OTHER END. IF TUBING IS CENTERED BETWEEN CONNECTORS, THE MAXIMUM EXPOSED CABLE WILL BE 0.125".

TABLE A		
P/N	L	STD?
MINCWF-4MFPX-1M-B-A50	40" [1m]	YES
MINCWF-4MFPX-2M-B-A50	79" [2m]	YES
MINCWF-4MFPX-3M-B-A50	118" [3m]	NO
MINCWF-4MFPX-4M-B-A50	157" [4m]	YES
MINCWF-4MFPX-5M-B-A50	197" [5m]	YES
MINCWF-4MFPX-6M-B-A50	236" [6m]	YES
MINCWF-4MFPX-8M-B-A50	315" [8m]	NO
MINCWF-4MFPX-10M-B-A50	393" [10m]	YES
MINCWF-4MFPX-15M-B-A50	590" [15m]	YES
MINCWF-4MFPX-20M-B-A50	786" [20m]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDERS REQUIRED

MATERIALS	
BODY:	BLACK TPE
INSERT:	BLACK TPE
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	18/4 CONTINUOUS FLEX EURO CC BLACK TPE JACKET. 20MM FLEXES, MIN BEND RADIUS IS 10x CABLE OD
COUPLING:	NICKEL PLATED BRASS
TUBING:	SILICONE TUBE NATURAL 50A DUROMETER

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V	MATERIAL
AMPS	5.5A	FINISH
TEMP	105°C	
SPECIFICATIONS		DO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION					
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	JJH				TITLE: 4 PL HI FLX EURO M-F EXT PLG 18AWG ARMRD		
	CHECKED							
	ENG APPR.							
	MFG APPR.							
	Q.A.		SIZE DWG. NO. REV B MINCWF-4MFPX-ZZ-B-A50 A					
MATERIAL	COMMENTS:					SCALE: 1:1 WEIGHT: SHEET 1 OF 1		
FINISH								
DO NOT SCALE DRAWING								